

Wiha offers the professional a wide range of high-quality premium tools, characterized by their

use of the latest manufacturing technologies, application-oriented innovations, ergonomic superiority, top quality, absolute reliability and long service life. In short, tools that make your

work noticeably easier - tools that work for you.

Learn more about Wiha on our website:

www.wiha.com

VDE-insulated tools from Wiha

To work safer, more efficiently and with less strain on the body.





Certified safety – from our own safety testing procedure according to IEC standards.

Voltage testing: All Wiha VDE-tools, which have special markings, are individually tested at 10,000 V AC and are approved for 1,000 V AC and 1,500 V DC

Cold shock test: Cooling down to -25° C. The skinning material must retain its toughness, so that it doesn't break when subjected to shock and knocks.

Test of electrical skinning properties: 24 hours storage in water, then 3 minutes test at 10,000 V AC. There must neither be flashover nor disruptive discharge.

Test of the adhesion of the skinning material coating: 168 hours storage at 70° C, then test of adhesion at 500 N.

Pressure tests: Test at 20 N pressure load, 70° C temperature and 5,000 V AC test voltage. No disruptive discharge may occur.

Test of combustion behaviour: The tools are subjected to a flame for 10 seconds. The skinning material must then extinguish and not continue to burn.

Safety note

The following equipment is required for all work on or around live components and should be appropriate for the specific task

- insulating personal protective equipment
- insulating safety mechanisms

insulated tools

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work.

This is achieved by complying with the five safety rules:

disconnect

secure against reconnection

• ensure power is switched off

- earth and short-circuit
- cover or block off adjacent live components



As an internationally recognized institute, the VDE is responsible for the testing and certification of electrotechnical products. Wiha provides the professional with a broad range of VDE products, developed and continuously optimized specifically for electricians, which also provide applicationoriented solutions for everyday use.

The Wiha quality-management system according to ISO 9001:2015 ensures that only first-class products are manufactured – and that you can work with products of excellent quality. To ensure maximum safety for the user, the entire Wiha VDE range must undergo the most stringent inspections and individual tests. All Wiha VDE-tools hold multiple certifications: The VDE-GSmark stands for safety with regard to any risk, from electrical right up to radiological. Products labelled with a double triangle and a voltage range are suitable for work with live parts.

The international standard IEC 60900 defines the construction, safety as well as single, series, andrandom testing of insulated tools. But with Wiha you don't just work safer, but also healthier and moreefficiently. Specially developed ergonomic geometries ensure comfortable handling that protects body from strain. The result: easier work, less signs of fatigue, more efficiency.



83 professionals. One system.

ElectricVario family by Wiha.



There has never been a team with so many exceptional players: the ElectricVario Family by Wiha unites all fastening tools that electricians need for all the challenges in their job. These include many new members to complete the team. The best thing about them: Thanks to the countless combination possibilities, the tools can be used flexibly and thus save valuable time and space. Combinable with one another, the tools also ensure safe screw-fastening on live parts thanks to their insulation. The ergonomically shaped screwdriver handles also help to protect the user's muscles. Professional users play in the Premier League when they use ElectricVario Family products. They can always be identified via the ElectricVario Family logo.

Increases your efficiency


Various usage options for all fastening procedures and application fields.

• Offers you full protection

Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC.

Increases your safety

Wiha slimBits ensure unrestricted and fully insulated access to low-lying screws.

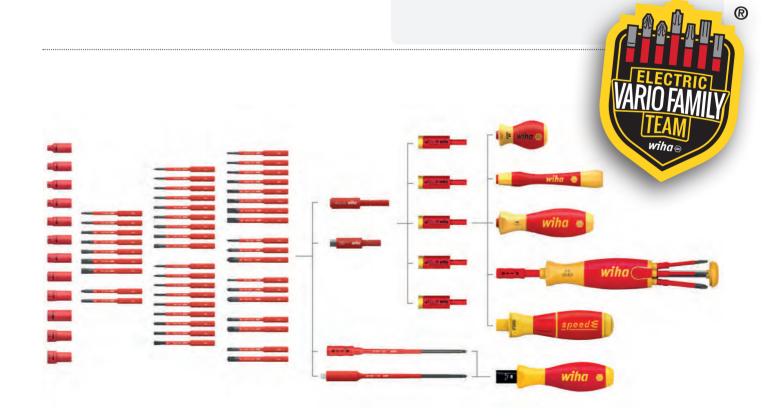

Content

Competence XXL II electrician's tool set Page 14



E-screwdriver, speedE® II electric

Page 30



Torque screwdriver set TorqueVario®-S electric

Page 8



BiCut® Professional electric high-performance diagonal cutters with DynamicJoint®

Page 104



Tool set electrician Competence XL

Page 16



Torque set easyTorque adapter electric

Page 42



slimBit electric bit set

Page 43



Heavy-duty diagonal cutters Professional electric with DynamicJoint®

Page 106



Tool set slimVario® electric

Page 19



Torque screwdriver with T-handle TorqueVario®-S T electric

Page 48



Screwdriver with bit magazine LiftUp electric

Page 52





Tool set electrician

Page 22



Screwdriver with bit holder set electric slimVario®

Page 56



Fine screwdriver set PicoFinish® slimVario® electric

Page 57



Cable cutter Professional electric Combination pliers Page 107 Professional electric with DynamicJoint® and OptiGrip

Page 108



Needle nose pliers Professional electric

Page 112



High-leverage combination pliers Professional electric with DynamicJoint® and OptiGrip

Page 11



Water pump pliers Professional electric

Page 112



Water pump pliers Professional electric

Page 113



Installation pliers TriCut Professional electric

Page 124



Stripping diagonal cutters Professional electric with **DynamicJoint®**

Page 124



Stripping tool

Page 125



Stripping tool automatic

Page 126



Flashlight with LED, laser and **UV** light

Page 150



Torque QuickCheck torque testing device

Page 150



Single-pole, non-contact volt detector, 12-1,000 V AC

Page 151



Voltage tester SoftFinish® single-pole, 110-250 volts

Page 151



SoftFinish® dowel racket set with dowels

Page 158



Electrician's hammer

Page 158



Bit set for mounting Page 23



Ratchet wrench set insulated 1/2"

Page 24



Single open-end spanner set, insulated 6-32 mm

Page 25



Range of Applications From page 10

Screwdriver with LiftUp 25 magnetic bit magazine

Page 68



Screwdriver with bit magazine magnetic

BitBuddy® TY bit set, 29 mm

Page 80



Page 85

L-key set in ErgoStar holder Page 96



Fastening / jamming From page 26

Schraubendreher mit Bit Magazin LiftUp 25 magnetisch



Shear for electricians



Hacksaw electric

Page 109



Trimming / cutting

From page 96

Precision mechanic's diagonal cutters Classic

Page 109



Long flat-nose pliers Professional electric

Page 109



Pliers wrench Classic

Page 114



Classic circlip pliers with MagicTips®, straight

Page 119



Supplying / holding

From page 106

Automatic crimp tool Page 127

Page 113



Stripping and crimping tool set 4-pcs.

Page 132



Wire end sleeves with plastic collar set

Page 136



Stripping/ insulating / crimping From page 116

Electrician's Longlife® folding ruler, 2 m

Page 152



Electrician's spirit level

Page 152



Surveying / marking / measuring / checking

From page 126

Striking / chiselling From page 134



The range.

Cases that really deliver.

The professional often has reservations about conventional tool boxes: too inaccessible, little storage space, not robust enough. Deficiencies that Wiha has taken to heart – and eliminated –in the development of its case sets.

Wiha cases therefore combine many good qualities: Stable inline rollers allow easy and stress-free transportation of tools. The durable PP-plastic with reinforced plastic elements ensures a longlifespan. Gas-filled shock absorbers hold the cover in all positions and reduce the risk of injury when closing. Tool trays ensure quick and easy access to the tool, the case itself provides a lot of extra storage space for small items and machines. And, last but not least, you can easily access the right tool, whenever it is needed.

"A case with all major Wiha tools and innovations - like Christmas for the electrician!"
Rolf Muschal



Your entire workshop - now you can take it with you!



Whether next door or at the most remote site: It's greatif the tool you need is quickly at hand. Compact, handyand robust, the Wiha toolbox set ensures access tothe tools you require, at any time and in any situation.

Specially compiled according to varying requirementsand applications, the Wiha toolbox sets have one thingin common: All include high-quality tools in provenWiha quality, guaranteeing easy and efficient working.

Ergonomic in design, durable in material and processing, and safe thanks to rigorous and extensive safety test procedures, Wiha tools prove to be a practical and indispensable companion for the electrician, especially in

their toolbox set.

Increases your efficiency

A wide range of tools – so the right one is always to hand when you need it.

Meets your requirements

Robuust, groot, duurzaam en veilig met dekseluithouder

Lowers your costs

The correct torque avoids damaging material and no follow-up work is necessary.

Offers you full protection

Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC.

















Meets your requirements: Case: robust, large, stable and secure with lid brake. Lowers your costs: The correct torque protects material from damage and ensures no additional follow-up work. Increases your safety: Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC. Gas-filled shock absorbers hold the lid in all positions and reduce the risk of injury when closing. Protect your health: Wiha pliers require less force and reduce pressure on wrists. Ergonomic handle design makes work easier and prevents occupational illnesses. Trolley with stable in-line rollers allow easy and stress-free transportation of tools to the work area. Increases your efficiency: A comprehensive tool assortment, always providing you with the right tool when it is needed. The design and function of the tool trays guarantee quick and easy access to tools. Increases your flexibility: Ample space for additional tools and lots of storage for small parts and machines.

| Order-No. | |
|---|--|
| 42069 | 1 |
| | ng / jamming |
| | Torque screwdriver set TorqueVario®-S electric (36791) 0,8-5,0 Nm |
| ⊖ (1) (1) | 1 x Torque screwdriver TorqueVario®-S electric Variable torque limit settings, VDE and GS tested / 1 x Adjusting tool for torque screwdriver with |
| | long handle / 1 x Adapter TorqueVario-S electric for slimBits 1 x 2,5 / 1 x 3,5 / 1 x 5,5 / 1 x 6,5 / 1 x PH1 / 1 x PH2 / 1 x PZ1 / 1 x PZ2 / 1 x SL/PZ1 / 1 x SL/PZ2 / 1 x T9 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 |
| ⊖ \$ \$ | Screwdriver with bit magazine LiftUp electric (41234) 1 x 2,5 / 1 x 3,5 / 1 x 5,5 / 1 x PZ1 / 1 x PZ2 / 1 x SL/PZ2 |
| 0 | Screwdriver with bit holder SoftFinish® electric slimVario Stubby für slimBits, VDE and GS tested (41229) |
| ₩ | PZ2 x 75 |
| Θ | Screwdriver SoftFinish® electric slimFix Slotted, VDE and GS tested / 3,5 x 100 (35446) / 5,5 x 125 (35391) / 6,5 x 150 (35392) |
| ⊕ | Screwdriver SoftFinish® electric slimFix Phillips, VDE and GS tested / PH1 x 80 (35393) / PH2 x 100 (35394) |
| * | Screwdriver SoftFinish® electric slimFix Pozidriv, VDE and GS tested / PZ1 x 80 (35395) / PZ2 x 100 (35396) |
| * | Screwdriver SoftFinish® electric slimFix PlusMinus/Pozidriv, VDE and GS tested / SL/PZ1 x 80 (36329) / SL/PZ2 x 100 (36330) |
| * | Screwdriver SoftFinish® electric slimFix TORX® Tamper Resistant (with hole), VDE and GS tested / T10H x 100 (41141) / T15H x 100 (41142) / T20H x 100 (41143) / T25H x 125 (41144) |
| 0 | Screwdriver SoftFinish® electric Hex nut driver, VDE and GS tested / 5,5 x 125 (00856) / 7 x 125 (00858) / 8 x 125 (00859) / 10 x 125 (00861) / 13 x 125 (00864) |
| + | Fine screwdriver PicoFinish electric Phillips, VDE and GS tested / PH0 x 60 (38880) |
| \ominus | Fine screwdriver PicoFinish electric Schlitz, VDE and GS tested / 2,5 x 60 (38876) |
| $\ominus \oplus \diamond \diamond \diamond$ | ♥ Switch cabinet key pen shape 1/4" in blister pack 5-8 x 9 (39076) |
| ————————————————————————————————————— | Screwdriver SoftFinish® Slotted with one-piece hexagonal blade and solid steel cap 3,5 x 75 (03223) / 12,0 x 200 (03231) |
| ⊕ ⊕ ● | XLSelector Y bit set, 25 mm (41832) 1 x PH1 / 4 x PH2 / 1 x PH3 / 2 x PZ1 / 4 x PZ2 / 2 x PZ3 / 2 x T10 / 3 x T15 / 3 x T20 / 3 x T25 / 3 x T30 / 2 x T40 / 1 x Bit holder magnetic extra strong magnet, 1/4" |
| • | L-key set in ErgoStar holder (41979) 1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10 |
| Trimming | g / cutting |
| X | Professional BiCut® high-performance diagonal cutters with DynamicJoint® Switchable, VDE and GS tested 200mm, 8" (38191) |
| X | Professional electric diagonal cutters with DynamicJoint® 160 x 6 1/2" (43335) |
| <u> </u> | Cable cutter Professional electric, VDE and GS tested / 200mm, 8" (34744) |
| <u> </u> | Precision mechanic's diagonal cutters Classic with opening spring 125mm, 5" (36189) |
| Supplyin | g / holding |
| | Combination pliers Professional electric with DynamicJoint® and OptiGrip with extra long cutting edge, VDE and GS tested / 180 mm, 7" (26708) |
| • | Needle nose pliers Professional electric with cutting edge curved shape, approx. 40°, VDE and GS tested / 200mm, 8" (26729) |
| • | Needle nose pliers Professional electric with cutting edge straight shape, VDE and GS tested / 200 mm, 8" (26727) |
| | Water pump pliers Professional electric with push button adjustment, VDE and GS tested / 250mm, 10" (37450) |
| Stripping | g/ insulating / crimping |
| X | Installation pliers TriCut Professional electric 170mm, 7" (38552) |
| | Stripping tool with self-rotating trailing blade 165mm, 6½" (35969) |
| | Stripping tool automatic up to 16 mm² in blister pack 200mm, 8" (42062) |
| • | Automatic crimp tool for wire-end sleeves hex crimping 210mm, 0,08-16mm² (41246) |
| • | Crimp tool for insulated terminals and connectors 220mm, 0,5-6mm² (33841) |
| <u> </u> | Shear for electricians with crimp function in blister pack 160mm, 50mm² (41923) |
| Survevin | ng/marking/measuring/checking |
| | Single-pole, non-contact volt detector, 90–1,000 VAC Includes two AAA batteries (43798) |
| | Flashlight with LED, laser and UV light in blister pack, including 3 AAA batteries 100 / 310 lm x 390 - 400 nm (41286) |
| | Electrician's spirit level 40 cm (42074) |
| | Electrician's Spirit level 40 cm (42074) Electrician's Longlife® folding ruler, 2 m metric, 10 segments (42068) |
| | SoftFinish® dowel racket set with dowels (41289) |
| ⊕ | 1 x Dowel racket / 2 x 30 mm Dowel / 2 x 40 mm Dowel |
| Striking | / chiselling |
| | Electrician's hammer with 300 g hammer head, in blister pack 23,9 x 283 (42071) |
| | |













Meets your requirements: Case: robust, large, stable and secure with lid brake. Lowers your costs: The right tool protects you from damaging materials and avoids subsequent work. Increases your safety: Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC. Gas-filled shock absorbers hold the lid in all positions and reduce the risk of injury when closing. Protect your health: Wiha pliers require less force and reduce pressure on wrists. Ergonomic handle design makes work easier and prevents occupational illnesses. Carry belt enables the simple transport of the tool case and keeps hands free for other materials. Increases your efficiency: A comprehensive tool assortment, always having the right tool at hand when needed. The design and function of the tool trays guarantee quick and easy access to tools. Increases your flexibility: Ample space for additional tools and lots of storage for small parts and machines.

| assortea | 9300-7 sun case | 02 |
|-----------------------|---|-----|
| Order-No. | | |
| 10523 | 1 | |
| Fastenin | / jamming | |
|) | Screwdriver SoftFinish® electric Hex nut driver, VDE and GS tested / 5,5 x 125 (00856) / 7 x 125 (00858) / 8 x 125 (00859) / 10 x 125 (00861) | |
| € | Screwdriver SoftFinish® electric slimFix Slotted, VDE and GS tested / 3,5 x 100 (35446) / 4,0 x 100 (35390) / 5,5 x 125 (35391) / 6,5 x 150 (35392) | |
| Ð | Screwdriver SoftFinish® electric slimFix electric PlusMinus/Phillips, VDE and GS tested / SL/PH1 x 80 (35502) / SL/PH2 x 100 (35503) | |
| ₽ | Screwdriver SoftFinish® electric slimFix PlusMinus/Pozidriv, VDE and GS tested / SL/PZ1 x 80 (36329) / SL/PZ2 x 100 (36330) | |
| ₽ | Screwdriver SoftFinish® electric slimFix Phillips, VDE and GS tested / PH1 x 80 (35393) / PH2 x 100 (35394) | |
| ₽ | Screwdriver SoftFinish® electric slimFix Pozidriv, VDE and GS tested / PZ1 x 80 (35395) / PZ2 x 100 (35396) | |
|) | Screwdriver SoftFinish® Slotted with one-piece hexagonal blade and solid steel cap 12,0 x 200 (03231) | |
| → ◆ • • | Switch cabinet key cross shape (36114) | |
| ∋⊕⊛ | Screwdriver with bit magazine LiftUp electric (38611) 1 x 3,0 / 1 x 4,0 / 1 x 5,5 / 1 x PH1 / 1 x PH2 / 1 x SL/PZ2 | |
| • | L-key set in Compact holder (01418) 1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10 | |
| → + + • | Bit set XLSelector Standard 25 mm (29417) 1 x 4,5 / 1 x 5,5 / 1 x 6,5 / 2 x PH1 / 4 x PH2 / 1 x PH3 / 2 x PZ1 / 5 x PZ2 / 1 x PZ3 / 2 x T10 / 2 x T15 / 2 x T20 / 3 x T25 / 2 x T30 1 x T40 / 1 x Bit holder magnetic, 58 mm 1/4" | / |
| Trimming | / cutting | |
| <u> </u> | Professional BiCut® high-performance diagonal cutters with DynamicJoint® Switchable, VDE and GS tested / 200mm, 8" (38191) | |
| <u> </u> | Professional electric diagonal cutters with DynamicJoint® 180 x 7" (43340) | |
| , | Precision mechanic's diagonal cutters Classic with opening spring 125mm, 5" (36189) | |
| Supplyin | / holding | |
| | Combination pliers Professional electric with DynamicJoint® and OptiGrip with extra long cutting edge, VDE and GS tested / 180 mm, 7" (2670) | 18) |
| • | Needle nose pliers Professional electric with cutting edge curved shape, approx. 40°, VDE and GS tested / 200mm, 8" (26729) | |
| • | Needle nose pliers Professional electric with cutting edge straight shape, VDE and GS tested / 200 mm, 8" (26727) | |
| | Water pump pliers Professional electric with push button adjustment, VDE and GS tested / 250mm, 10" (37450) | |
| Stripping | insulating / crimping | |
| T | Installation pliers TriCut Professional electric 170mm, 7" (38552) | |
| | Stripping tool automatic up to 6 mm² in blister pack 190mm, 7 ½" (36050) | |
| | Stripping tool with self-rotating trailing blade 165mm, 6½" (35969) | |
| | Crimp tool for wire-end sleeves 220mm, 0,14-16mm² (33844) | |
| Surveyin | /marking/measuring/checking | |
| | Single-pole, non-contact volt detector, 90-1,000 VAC Includes two AAA batteries (43798) | |

Folding ruler Longlife 2 m metric, 10 segments (27057)

Switch cabinet spirit level 20 cm (36859)










Meets your requirements: Carefully selected tool ranges for the most common applications. **Increases your safety:** Wiha slim blades ensure unlimited, protected access to deep-set screws. Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC. **Increases your efficiency:** Compact and space-saving tool range.

| assort | ted 29-pcs. in bag | 9300-040 |
|-----------|---|----------|
| Order-I | No. | |
| 43879 | | 1 |
| Faste | ning / jamming | |
| Θ | Screwdriver SoftFinish® electric slimFix Slotted, VDE and GS tested / 3,5 x 100 (35446) / 5,5 x 125 (35391) | |
| ⊕ | Screwdriver SoftFinish® electric slimFix Phillips, VDE and GS tested / PH1 x 80 (35393) / PH2 x 100 (35394) | |
| ₩ | Screwdriver SoftFinish® electric slimFix Pozidriv, VDE and GS tested / PZ1 x 80 (35395) / PZ2 x 100 (35396) | |
| \ominus | PicoFinish® fine screwdriver Slotted 1,5 x 40 (42384) / 2,0 x 40 (42388) / 2,5 x 50 (42391) / 3,0 x 50 (42394) | |
| ⊕ | PicoFinish® fine screwdriver Phillips PH00 x 40 (42402) / PH0 x 50 (42401) | |
| ⊕⊕• | ◆ ○ Switch cabinet key cross shape (36114) | |
| • | L-key set in Compact holder (01418) 1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10 | |
| Trimm | ning / cutting | |
| | Diagonal cutters Electronic wide, pointed head without bevelled edge 130mm, 5 ½" (26818) | |
| X | Professional electric diagonal cutters with DynamicJoint® 160 x 6 1/2" (43335) | |
| Suppl | ying / holding | |
| • | Needle nose pliers Professional electric with cutting edge straight shape, VDE and GS tested / 200 mm, 8" (26727) | |
| | Needle nose pliers Electronic narrow, short head straight form 150mm, 6" (26801) | |
| Stripp | ing/ insulating / crimping | |
| | Stripping tool with self-rotating trailing blade 165mm, 6½" (35969) | |
| | Stripping tool automatic up to 6 mm² in blister pack 190mm, 7 ½" (36050) | |
| Surve | ying/marking/measuring/checking | |
| | Single-pole, non-contact volt detector, 90–1,000 VAC Includes two AAA batteries (43798) | |
| | | |











Simplifies your work: Robust, orderly bag offers a great deal of space to store Wiha tools. **Increases your efficiency:** Opened bag acts as a workbench stand to remove tools easily.

| mixed, 3 | 1-pcs. in functional bag | 7209N |
|---|--|---|
| Order-No. | | ••••••••••••••••••••••••••••••••••••••• |
| 43465 | 1 | |
| Θ | 2,0 x 75 / 3,5 x 75 / 5,5 x 75 / 6,5 x 75 | |
| ⊕ | PH0 x 75 / PH1 x 75 / PH2 x 75 | |
| ₩ | SL/PZ1 x 75 / SL/PZ2 x 75 | |
| ₩ | PZ1 x 75 / PZ2 x 75 | |
| 0 | 5 x 42 / 5,5 x 42 / 6 x 42 / 7 x 42 / 8 x 42 / 10 x 42 11 x 42 / 13 x 42 | 2 / |
| | 3×75 / 4×75 / 5×75 | |
| ③ | T10 x 75 / T15 x 75 / T20 x 75 / T25 x 75 | |
| | slimVario® electric adapter for 1/4" nut driver | |
| *************************************** | Extension slimVario® electric for slimBits | |
| Manufacture | Screwdriver with bit holder SoftFinish® slimVario® electric screwdriver PicoFinish® slimVario® electric / Screwdriver holder SoftFinish® electric slimVario d acc. to IEC 60900. | |

| Empty | 7209E |
|----------------------|-------|
| Order-No. | |
| 43474 | 1 |
| Functional bag Empty | |

Tool set electrician





9300-018

Protect your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Compact and space-saving tool range. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Screwdriver, diagonal cutters, 6-pcs. in tool pouch

Order-No.

33969

1

Fastening / jamming

Screwdriver SoftFinish® electric Slotted, VDE and GS tested / 3,5 x 100 (00822) / 4,5 x 125 (00824) / 5,5 x 125 (00826)

Screwdriver SoftFinish® electric Phillips, VDE and GS tested / PH1 x 80 (00847) / PH2 x 100 (00848)

Trimming / cutting

Professional electric diagonal cutters with DynamicJoint® 160 x 6 1/2" (43335)





Increases your efficiency: Compact and space-saving tool range. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Screwdriver, needle nose pliers, diagonal cutters, 5-pcs. in tool pouch

Z99 0 002 06

| | 200 0 002 00 |
|----------|---|
| Order-No | o. (|
| 26755 | 1 |
| Fasteni | ng / jamming |
| Θ | Screwdriver SoftFinish® electric Slotted, VDE and GS tested / 3,5 x 100 (00822) / 5,5 x 125 (00826) |
| ⊕ | Screwdriver SoftFinish® electric Phillips, VDE and GS tested / PH2 x 100 (00848) |
| Supplyi | ng / holding |
| • | Needle nose pliers Professional electric with cutting edge straight shape, VDE and GS tested / 200 mm, 8" (26727) |
| Trimmi | ng / cutting |
| X | Professional electric diagonal cutters with DynamicJoint® 160 x 6 1/2" (43335) |











Meets your requirements: Carefully selected tool ranges for the most common applications. Increases your safety: Internationally awardwinning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC. Protect your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: Compact and space-saving tool range.

| Mixed, 12-pcs. in tool pouch | 9300-025 |
|--|----------------|
| Order-No. | = |
| 36389 | 1 |
| Fastening / jamming | |
| Screwdriver SoftFinish® electric slimFix Slotted, VDI tested / 3,5 x 100 (35446) / 4,5 x 125 (35501) / 5 (35391) | |
| Screwdriver SoftFinish® electric slimFix Pozidriv, VD tested / PZ1 x 80 (35395) / PZ2 x 100 (35396) | E and GS |
| Trimming / cutting | |
| Cable cutter Professional electric with switchable o VDE and GS tested / 210mm, 8 ¼" (43662) | pening spring, |
| Supplying / holding | |
| Needle nose pliers Professional electric with cutting shape, VDE and GS tested / 200 mm, 8" (26727) | |
| Trimming / cutting | |
| Heavy-duty diagonal cutters Professional electric with DynamicJoint® with switchable opening spring 180mi | |
| Stripping/ insulating / crimping | |
| Stripping tool automatic up to 6 mm 2 in blister pact $1/2$ " (36050) | < 190mm, 7 |
| Stripping tool with self-rotating trailing blade 165mr (35969) | n, 6½" |
| Surveying/marking/measuring/checking | |
| Folding ruler Longlife 2 m metric, 10 segments (270 | 057) |
| Trimming / cutting | |
| Cable cutter Professional electric, VDE and GS test | ted / |

200mm, 8" (34744)









Increases your safety: Wiha slim blades ensure unlimited, protected access to deep-set screws. Protect your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: Compact and spacesaving tool range. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Screwdriver, heavy-duty diagonal cutters, 7-pcs. in tool pouch

| | 9300-031 |
|-------------|---|
| Order-N | lo. (|
| 38020 | 1 |
| Fasten | ing / jamming |
| Θ | Screwdriver SoftFinish® electric slimFix Slotted, VDE and GS tested / 3,5 x 100 (35446) / 4,0 x 100 (35390) / 5,5 x 125 (35391) |
| | Screwdriver SoftFinish® electric slimFix Phillips, VDE and GS tested / PH2 x 100 (35394) |
| # | Screwdriver SoftFinish® electric slimFix Pozidriv, VDE and GS tested / PZ2 x 100 (35396) |
| ₩ | Screwdriver SoftFinish® electric slimFix PlusMinus/Pozidriv, VDE and GS tested / SL/PZ2 x 100 (36330) |
| Trimm | ing / cutting |
| X | Heavy-duty diagonal cutters Professional electric with DynamicJoint® with switchable opening spring 160mm, 6,5" (40921) |









Simplifies your work: Free hands and no damage to work trousers thanks to pouch attached to belt. Increases your safety: Wiha slim blades ensure unlimited, protected access to deep-set screws. Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC. Protect your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: All main tools quickly accessible, always at hand.

| assorted | slotted, Phillips, 10-pcs. in belt pouch | 9300-012-01 |
|---|--|---------------|
| Order-No. | = | |
| 40948 | 1 | |
| Fastening | g / jamming | |
| Θ | Screwdriver SoftFinish® electric slimFix Slotted, VDE tested / 3,5 x 100 (35446) / 4,0 x 100 (35390) / 5 (35391) | |
| ⊕ | Screwdriver SoftFinish® electric slimFix Phillips, VDE tested / PH1 x 80 (35393) / PH2 x 100 (35394) | and GS |
| Stripping | / insulating / crimping | |
| | Stripping pliers Professional electric 160mm, 6 1/2" (2 | 26847) |
| | Stripping tool with self-rotating trailing blade 165mm (35969) | า, 6½" |
| Supplying | g / holding | |
| • | Needle nose pliers Professional electric with cutting shape, VDE and GS tested / 200 mm, 8" (26727) | edge straight |
| Surveying | g/marking/measuring/checking | |
| *************************************** | Measuring tape 5 m (33251) | |







Simplifies your work: Free hands and no damage to work trousers thanks to pouch attached to belt. Increases your safety: Wiha slim blades ensure unlimited, protected access to deep-set screws. Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC. Protect your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: All main tools quickly accessible, always at hand.

| assorted | d slotted, Pozidriv, 10-pcs. in belt pouch | 9300-013-02 |
|-----------|---|-------------|
| Order-No | | } |
| 40282 | - | 1 |
| Fastenin | g / jamming | |
| Θ | Screwdriver SoftFinish® electric slimFix Slotted, Vl tested / 3,5 x 100 (35446) / 4,0 x 100 (35390) / (35391) | |
| ₩ | Screwdriver SoftFinish® electric slimFix Pozidriv, V tested / PZ1 x 80 (35395) / PZ2 x 100 (35396) | /DE and GS |
| Stripping | g/ insulating / crimping | |
| D | Stripping pliers Professional electric 160mm, 6 1/2 | " (26847) |
| | Stripping tool with self-rotating trailing blade 165r (35969) | nm, 6½" |
| Supplyin | ng / holding | |
| • | Needle nose pliers Professional electric with cuttin shape, VDE and GS tested / 200 mm, 8" (2672 | 0 0 0 |
| Surveyin | ng/marking/measuring/checking | |
| | Measuring tape 5 m (33251) | |







Simplifies your work: Utmost accessibility thanks to long, 70 mm bits. Also ideal for machine operation. Makes handling easier: Variably adjustable blade length depending on application. Increases your efficiency: All common blades in one compact set.

19-pcs. in roll-up bag

| 19101 104 |
|-----------|
|-----------|

| Order-No. | |
|-----------|--|
| 41223 | 1 |
| | 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40 |
| ⊕ | 1 x PH0 / 1 x PH1 / 1 x PH2 |
| ₩ | 1 x SL/PZ1 / 1 x SL/PZ2 |
| Θ | 1 x 3,5 / 1 x 4,0 / 1 x 5,5 |
| | 1 x 4,0 / 1 x 5,0 / 1 x 6,0 |
| 0 | 1 x Bit holder magnetic, 74 mm 1/4" |
| 0 | 1 x Screwdriver handle SoftFinish®-telescopic for SYSTEM 6 interchangeable blade |
| 0 | 1 x Bit holder SYSTEM 6 clamping with ball |
| | |







Increases your efficiency: Various usage options for all fastening procedures and application fields. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your flexibility: Adjustable right or left rotation through switching lever. Protects your material: Fully insulated tool reduces the right of chart circuits.

switching lever. **Protects your material:** Fully insulated tool reduces the risk of short circuits.

| 20-pcs. ii | 1 case 7207NK2001 |
|------------|---|
| Order-No. | = |
| 43023 | 1 |
| | T-handle insulated for nut driver (43062) |
| | Ratchet wrench insulated for nut drivers Switchable 3/8" \times 200 (43052) |
| 0 | Insulated extension 3/8" square adapter for nut driver inserts, insulated 3/8" x 125 (43057) / 3/8" x 250 (43058) |
| 0 | Insulated nut driver insert 3/8" hexagon head 8 / 10 / 11 / 12 / 13 / 14 / 16 / 17 / 18 / 19 / 21 / 22 |
| • | Insulated nut driver insert 3/8" internal hexagon 4 x 75 (43105) / 5 x 75 (43106) / 6 x 75 (43107) / 8 x 75 (43108) |

Manufactured according to EN/IEC 60900.

Increases your efficiency: Various usage options for all fastening procedures and application fields. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your flexibility: Adjustable right or left rotation through switching lever. Protects your material: Fully insulated tool reduces the risk of short circuits.

| 20-pcs. ii | n case | 7208NK2001 |
|------------|---|----------------|
| Order-No. | (| 1 |
| 43024 | | 1 |
| | T-handle insulated for nut driver (43063) | |
| | Ratchet wrench insulated for nut drivers Switchal (43053) | ble 1/2" x 250 |
| 0 | Insulated extension 1/2" square adapter for nut of insulated 1/2" x 250 (43056) / 1/2" x 125 (43055) | |
| 0 | Insulated nut driver insert 1/2" hexagon head 10 / 11 / 12 / 13 / 14 / 17 / 19 / 22 / 24 / 27 / 32 | 2 |
| • | Insulated nut driver insert 1/2" internal hexagon / 5 x 120 (43101) / 6 x 120 (43102) / 8 x 120 (43 (43104) | , , |

Manufactured according to EN/IEC 60900.





Increases your efficiency: Improved accessibility to restricted spaces thanks to 15° jaw positioning. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Protects your material: Fully insulated tool reduces the risk of short circuits.

20-pcs. in case

5590N T20

| Order-No. | = |
|-----------|---|
| 43022 | 1 |
| 0 | Single, insulated open-end spanner 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 22 / 24 / 27 / 30 / 32 |
| 0 | Adjustable spanner electric Adjustable between 0-30 mm 0 - 30 x 250 (43061) |

Manufactured according to EN/IEC 60900.



Fastening / jamming

We have the know-how at the tip of our fingers.

The ergonomic quality of a tool is never quite so apparent as when fastening and clamping. Underthe motto "A grasp on turning" Wiha presents an innovative handle size concept which breaks newground in terms of individual user comfort.

Many commonly available screwdrivers are not designed to meet the needs of users. This resultsin disadvantages in guiding the tool as well as in transmitting force while fastening. In contrast, the-Wiha SoftFinish® concept works with four different handle sizes: Thus, each handle has a perfectly-correlated ratio of guidance, speed and torque for any task.

The Wiha slimTECHNOLOGY offers additional comfort, permitting unrestricted access to each screw with 33 % slimmer blades.

The speedE® II e-screwdriver proves itself to be the ideal tool for virtually every screw-fastening task. Whether handling delicate fastenings, long screws or an extremely large number of screws, professionals can do their job faster while working with the e-screwdriver.

"The speedE® II is my most trusted partner in my daily work. Especially at the end of a long workday, it not only saves energy but also time, as I can work significantly faster with it. In addition, it has two power transmission levels* and due to the different colours of the bits, I immediately know which one to use without damaging the material. Thanks to the speedE® II, working error-free and gently is no longer the exception but the rule."

Simon Furrer, WorldSkills 2017 World Champion in Abu Dhabi, Industrial Control Category



Fast has never been this unique.



Several fastenings per day, hundreds of fastenings per week. Professional craftspeople invest a great amount of time and energy in recurring fastening tasks. The resulting pain in wrists is the body's natural reaction. Thanks to the electric drive of the e-screwdriver speedE® II, joints and tendons are protected, especially during continuous use. In addition, the required time is reduced to one-third. An extra highlight of the speedE® II is the integrated material function. Sensitive fastenings, for example, plastic socket covers, must not be tightened too hard or the material will be damaged. In such cases, the speedE II automatically switches off at 0.4 Nm and gives the user full control to carefully carry out the final fastening by hand. If there are fastening tasks that require more force, the second generation speedE® offers the option of increasing the electric force to 1.0 Nm via a sliding switch. The colour of the slimBits serves as an aid for adjusting the correct force level to the respective application. The red slimBits with the smaller profiles are used in the red slide position, while the yellow Power SlimBits with the larger profiles indicate that in this case, the more powerful yellow slide position can be used. However, if more force is required, the speedE® can be manually used up to 12 Nm without incurring any damage. During the fastening, the integrated LED light provides permanent illumination for an optimal view of the

screw. This way, in poorly lit work environments the powerful LED can be used as a flashlight by tapping on the ring switch. The enlarged ring switch and smooth rotation ensure even easier handling. Thanks to the combination of facilitated handling and the ergonomic SoftFinish® handle design, the e-screwdriver speedE® II is recommended by doctors and therapists from the German Campaign for Healthier Backs. The set contains both a red and yellow slimBit, a USB battery charger, as well as two standard 18500 batteries, which ensures continuous working.



E-screwdriver, starter set speedE® I electric





























Meets your requirements: Quality and robustness made in Germany. Simplifies your work: Maximum illumination of the working area thanks to the LED ring light. Makes handling easier: Unique ring switch allows operation in all working positions. Protect your health: Gentle on hands and muscles. Recommended by doctors and therapists at the German Campaign for Healthier Backs! Increases \mathbf{your} efficiency: 100% compatible with the Wiha Electric Vario family. Offers you full protection: slimBits tested at 10,000 V AC and approved for 1,000 V AC. Increases your speed: Work completed 3 times as fast thanks to the electric drive. Protects your material: Electric screw fastening with protective function to prevent damage to materials.

Protect your health: Recommended by German doctors and therapists from German Campaign for Healthier Backs. Increases your control: Fixing by hand with a deft touch. Offers you full protection: slimBits tested at 10,000 V AC and approved for 1,000 V AC. Increases your speed: Work twice as fast thanks to three-step process. Protects your material: Electric screw fastening with protection function to prevent damage to materials (max. 0.4 Nm).







7 pcs with slimBits, batteries and USB charger in L Boxx Mini

| | 591 |
|-----------|---|
| Order-No | |
| 44318 | 1 |
| * | SL/PZ2 x 75 |
| \ominus | 3,5 x 75 |
| | E-screwdriver handle speedE® |
| | Charger for 18500 Li-ion batteries with USB |
| | Battery set, 18500 Li-ion 2 units in box |


4-part with slimBit, battery and USB charger

| | | | | | | | | | | | | | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|--|------|------|------|--|--|--|--|--|--|--|--|
| | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | |

590

| Order-No | |
|----------|---|
| 44351 | 1 |
| * | SL/PZ1 x 75 |
| | E-screwdriver handle speedE® |
| | Charger for 18500 Li-ion batteries with USB |
| | 18500 Li-lon battery in box |

Battery set, 18500 Li-ion





| 2 units in box | 5991 |
|----------------|------|
| Order-No. | |
| 41914 6 | |

Charger for 18500 Li-ion batteries



| with US | B and Europlug | 5992 |
|----------|----------------|------|
| Order-No |). | |
| 41915 | Power plug EU | 1 |
| 42766 | Power plug UK | |

Power plug



| EU | 5992 |
|-----------|------|
| Order-No. | |
| 14363 | |
| | |

Power plug



| UK 5 | 9925992 |
|-----------|---------|
| Order-No. | |
| 44364 | |

for e-screwdriver speedE®

5994E

Order-No. 44367

INFOBOX: Wiha speedE® II





E-screwdriver speedE®


- 3x faster than manual fastening.
- Two material protection levels: 0.4 Nm and 1.0 Nm.
- Made in Germany.
- Safe working up to 1,000 V AC.
- Manual torque fastening up to 12 Nm.
- Powerful ring LED light.
- Replaceable standard battery.
- Kind to hands and muscles.
- Fully compatible with the Wiha slimBit system.















Power slimBit electric bit set





















2831

Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Makes handling easier: Compact slimBit box with easy access and an optimal view of profiles. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Increases your safety: Wiha Power slimBits ensure good, protected access to deep-set screws. Makes handling easier: Compact slimBit box with easy access and an optimal view of profiles. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.









Mixed 6-ncs in slimBit hox

Manufactured acc. to IEC 60900.

Manufactured acc. to IEC 60900.

Slotted, Phillips, Pozidriv 6-pcs. in SlimBit box

| Order-No |). | |
|------------|-----------------------|---|
| 43160 | | 6 |
| \ominus | 2,0 / 2,5 | |
| ⊕ | PH0 / PH1 | |
| ₩ | PZ0 / PZ1 | |
| | slimBit box | |
| Manufactur | ed acc. to IEC 60900. | |

| winked 0-pcs. III silliibit box | | 2831 |
|---|-----------------|------|
| Order-No | Э. | |
| 44106 | | 1 |
| \ominus | 5,5 | |
| \oplus | PH2 | |
| ₩ | SL/PZ2 | |
| (*) | T15 / T20 / T25 | |
| *************************************** | slimBit-Box | |

| Mixed 6-pcs. in slimBit box | | |
|-----------------------------|-------------------------|---|
| Order-N | 0. | |
| 44366 | | 1 |
| \ominus | 2,5 | |
| ⊕ | PH1 | |
| ₩ | PZ1 | |
| * | SL/PZ1 | |
| | T9 / T10 | |
| | slimBit-Box | |
| Manufactu | ired acc. to IEC 60900. | |

| Slotted, hex, 6-pcs. in slimBit box 2831 | | |
|--|---------------------|----------|
| Order-No. | | = |
| 44107 | | 1 |
| \ominus | 6,5 | |
| | 2,5 / 3 / 4 / 5 / 6 | |
| | slimBit-Box | |





There are moments when you need to control your power.



Power is good. Controlled power is better. The fully certified Wiha VDE torque screwdriver systems

TorqueVario®-S and TorqueVario®-S TR combine precision with safety: With a distinctly audible and perceptible click signal when the torque value is reached. With a release accuracy of +/-6 % of the set scale value, Wiha VDE screwdrivers meet the accuracy requirements of EN ISO 6789. Uncompromising safety is ensured in production and testing according to IEC 60900, VDE/GS certification and individual product testing at 10,000 V AC.

Increases your efficiency

Using the correct torque prevents from rework and damaged material.

• Lowers your costs

The correct torque protects you from warranty claims.

• Offers you full protection

Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

• Increases your safety

Wiha slimBits grant unhindered, fully insulated access to deeplying screws.















Meets your requirements: A variably settable torque covers a large application area. Simplifies your work: All tools securely arranged in a robust, orderly bag. Lowers your costs: The correct torque protects you from warranty claims. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Protect your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: The correct torque avoids damaging material and no follow-up work is necessary. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Mixed, variably adjustable torque limit, 18 pcs. in folding bag

2872 T18

| Order-N | lo. |
|--------------------------|---|
| 36791 | 1 |
| 0 | 1 x Torque screwdriver TorqueVario®-S electric Variable torque limit settings, VDE and GS tested / 0,8-5,0 Nm |
| | 1 x Adjusting tool for torque screwdriver with long handle |
| 0 | 1 x Adapter TorqueVario-S electric for slimBits |
| Θ | 1x2,5• / 1x3,5 / 1x5,5 / 1x6,5 |
| 1 | 1 x PH1 / 1 x PH2 |
| \$\frac{1}{2} | 1 x PZ1 / 1 x PZ2 |
| * | 1 x SL/PZ1 / 1 x SL/PZ2 |
| * | 1 x T9 / 1 x T10• / 1 x T15 / 1 x T20 / 1 x T25 |

• no slim version

Manufactured acc. to IEC 60900. DIN EN ISO 6789.















Meets your requirements: A variably settable torque covers a large application area. Simplifies your work: All tools securely arranged in a robust, orderly bag. Lowers your costs: The correct torque protects you from warranty claims. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Protect your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: The correct torque avoids damaging material and no follow-up work is necessary. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Mixed, variably adjustable torque limit, 13 pcs. in folding bag

2872 T13

| Order-N | No. |
|---|---|
| 40674 | 1 |
| 0 | 1 x Torque screwdriver TorqueVario®-S electric Variable torque limit settings, VDE and GS tested / 0,8-5,0 Nm |
| *************************************** | 1 x Adjusting tool for torque screwdriver with long handle |
| 0 | 1 x Screwdriver with bit holder SoftFinish® electric slimVario for slimBits, VDE and GS tested |
| 0 | 1 x Adapter TorqueVario-S electric for slimBits |
| Θ | 1 x 2,5• / 1 x 3,5 / 1 x 5,5 |
| ⊕ | 1 x PH1 / 1 x PH2 |
| ₩ | 1 x PZ1 / 1 x PZ2 |
| ₩ | 1 x SL/PZ1 / 1 x SL/PZ2 |

• no slim version

Manufactured acc. to IEC 60900. DIN EN ISO 6789.

TorqueVario®-S electric nut driver insert 1/4" set







Simplifies your work: All tools securely arranged in a robust, orderly bag. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your flexibility: Nut driver inserts can be used with speedE®, slimVario® and TorqueVario®-S tools thanks to the enclosed adapters. Protects your material: Fully insulated nut driver reduces the risk of short circuits.

Mixed, 10-pcs., with adapters in folding bag

7209N

| Order-No. | |
|-----------|--|
| 43466 | 1 |
| | 1 x slimVario® electric adapter for 1/4" nut driver |
| 0 | 1 x Adapter TorqueVario-S electric for 1/4" nut driver |
| 0 | 1 x 5 / 1 x 5,5 / 1 x 6 / 1 x 7 / 1 x 8 / 1 x 10 / 1 x 11 / 1 x 13 |

Torque screwdriver set TorqueVario®-S electric













Meets your requirements: A variably settable torque covers a large application area. Lowers your costs: The correct torque protects you from warranty claims. Protect your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: The correct torque avoids damaging material and no follow-up work is necessary. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

PlusMinus/Pozidriv variably settable torque limit 5-pcs.

2872 S3

| Order-No | D. (1) |
|----------|---|
| 38074 | 1 |
| 0 | 1 x Torque screwdriver TorqueVario®-S electric Variable torque limit settings, VDE and GS tested / 0,8-5,0 Nm |
| | 1 x Adjusting tool for torque screwdriver with long handle |
| 0 | 1 x Adapter TorqueVario-S electric for slimBits |
| * | 1 x SL/PZ1 / 1 x SL/PZ2 |











Meets your requirements: A variably settable torque covers a large application area. Lowers your costs: The correct torque protects you from warranty claims. Protect your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: The correct torque avoids damaging material and no follow-up work is necessary. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

○Variable torque limit settings

2872

| Best. Nr. | Nm | #4 % | 0 | = | |
|-----------|---------|-------------|-----|----------|---------|
| 26625 | 0,5-2,0 | 6 % | 3,8 | 131 | 30 |
| 26626 | 0,8-5,0 | 6 % | 3,8 | | 36 |
| 26627 | 2,0-7,0 | 6 % | | 142 | |

Manufactured acc. to IEC 60900. DIN EN ISO 6789.



for torque screwdriver with long handle

2859

| Order-No. | ı ≺ mm | ≂ | |
|-----------|-------------------|----------|---|
| 26864 | 146 | 90 | 1 |












Increases your safety: Checking your torque tool regularly guarantees safe, precise work with the correct torque. Saves time: LED traffic light system displays results in a way which is quick and easy to understand. Increases your efficiency: Fast, easy checking of your torque tool thanks to mobile, compact shape.

with adapter blades and batteries in box

2909

| *************************************** | | | | |
|---|-----|--------------|---|---|
| Best. Nr. | Nm | +/- % | | |
| 42086 | 2,8 | 2 | X | 1 |

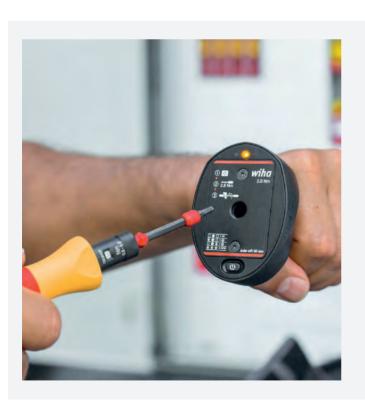

INFOBOX:

Torque QuickCheck







Wiha Torque QuickCheck

- The Wiha torque screwdriver can quickly and easily test torque screwdrivers to check the precision of the configured torque value before each use.
- Checking tools regularly ensures reliable, precise work.
- The device offers user-friendly operation, clear test readings and easy to understand LED traffic light
- Thanks to a compact, handy shape, it is the ideal companion when out on jobs.
- Suitable for all Torque Vario®-S and iTorque® torque screwdrivers whose torque range included 2.8 Nm.



Torque set easyTorque adapter electric











Lowers your costs: The correct torque protects you from warranty claims. Increases your efficiency: The correct torque avoids damaging material and no follow-up work is necessary. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

with slimVario® holder and SL/PZ slimBits, 4-pcs. in blister pack

29701 080 S4

| Order-No. | = |
|--------------|--|
| 41476 | 1 |
| | 1 x 0,8 Nm ±10% |
| ₩ | 1 x SL/PZ1 / 1 x SL/PZ2 |
| Manufactured | 1 x SoftFinish® electric screwdriver handle acc. to IEC 60900. |

with slimVario® holder and SL/PZ slimBits, 4-pcs. in blister pack

29701 200 S4

| | | 29701 200 34 |
|----------------|--|--------------|
| Order-No. | | |
| 41477 | | 1 |
| | 1 x 2,0 Nm ±10% | |
| ₩ | 1 x SL/PZ1 / 1 x SL/PZ2 | |
| Name do at man | 1 x SoftFinish® electric screwdriver handle acc. to IEC 60900. | |
| Manufactured | acc. to lec 60900. | |

with slimVario® holder and SL/PZ slimBits, 4-pcs. in blister pack

29701 280 S4

| | 29701 200 3 | 54 |
|--------------|---|----|
| Order-No. | | |
| 41478 | 1 | |
| | 1 x 2,8 Nm ±10% | |
| ₩ | 1 x SL/PZ1 / 1 x SL/PZ2 | |
| | 1 x SoftFinish® electric screwdriver handle | |
| Manufactured | acc. to IEC 60900. | |

Torque set easyTorque adapter electric









Lowers your costs: Torque tool extension for LiftUp and slimVario® screwdriver sets. The correct torque protects you from warranty claims. Lowers your costs: Torque tool extension for LiftUp and slimVario® screwdriver sets. The correct torque protects you from warranty claims. Increases your efficiency: The correct torque avoids damaging material and no follow-up work is necessary. Fully compatible with the Wiha slimBit system. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

for slimBits and slimVario® holder, 5-pcs. in blister pack

| Order-No. | | |
|-----------|-----------------------------|---|
| 41479 | | 1 |
| ±10% | 1 x 0,8 Nm / 1 x 2,0 Nm / 1 | |

Manufactured acc. to IEC 60900.

Torque adapter easyTorque electric



29701 S5







Lowers your costs: Torque tool extension for LiftUp and slimVario® screwdriver sets. The correct torque protects you from warranty claims. Increases your efficiency: The correct torque avoids damaging material and no follow-up work is necessary. Fully compatible with the Wiha slimBit system. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

for slimBits and slimVario® holder in blister

2970

| Order-No. | Nm | # /4 % | ₽ | * | = |
|--------------|-----|---------------|----|--------------|----------|
| 41341 | 0,8 | 10 % | 59 | 5,5 | 1 |
| 41342 | 2,0 | 10 % | 59 | 5,5 | 1 |
| 41343 | 2,5 | 10 % | 59 | 5,5 | 1 |
| 41344 | 2,8 | 10 % | 59 | 5,5 | 1 |
| 41345 | 4,0 | 10 % | 59 | 5,5 | 1 |
| Manufactured | | | | | |











Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Makes handling easier: Compact slimBit box with easy access and an optimal view of profiles. Convenient safe storage of 12 slimBits – easily taken directly from the belt. Makes handling easier: Compact slimBit box with easy access and an optimal view of profiles. Convenient safe storage of 12 slimBits – easily taken directly from the belt. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

2831





TORX®, TORX PLUS®, 12-pcs. in SlimBit box

| Order-No. | | |
|---|--|---|
| 43161 | | 6 |
| • | 6IP• / 7IP• / 8IP• / 9IP• / 10IP• / 15IP | |
| * | T6• / T7• / T8• / T9• / T10• / T15 | |
| *************************************** | slimBit box | |

• no slim version

Manufactured acc. to IEC 60900.

Slotted, Phillips, Pozidriv, PlusMinus/Pozidriv, TORX® 12-pcs. in SlimBit box

| | - | 2831 |
|---|------------------------|------|
| Order-No | | |
| 43162 | | 6 |
| \ominus | 3,5 / 5,5 | |
| \oplus | PH1 / PH2 | |
| ₩ | PZ1 / PZ2 | |
| * | SL/PZ1 / SL/PZ2 | |
| | T10• / T15 / T20 / T25 | |
| *************************************** | slimBit box | |

• no slim version Manufactured acc. to IEC 60900.

INFOBOX: slimBit box





slimBit box

- Compact slimBit box with easy access and an optimal view of profiles.
- Suitable for storing Wiha slimBits. Ideal for mobile use.
- Wiha slimBits ensure unrestricted and fully insulated access to low-lying screws.
- Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.







Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Makes handling easier: Compact slimBit box with easy access and an optimal view of profiles. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.





| Slotted. | 6-ncs | in | SlimBit | hox |
|----------|--------|-----|----------|-----|
| Siotteu, | 0-DC5. | 111 | SIIIIDIL | DUX |

| Order-No. | | |
|-----------|---------------------------|---|
| 43152 | | 6 |
| Θ | 2,0• / 2,5• / 3,5 / 4,0 / | |
| | slimBit box | |

• no slim version

Manufactured acc. to IEC 60900.

TORX®, 6-pcs. in SlimBit box

| Order-No. | - | |
|-----------------|-----------------------------|----------|
| 43153 | | 6 |
| (*) | T8• / T9• / T10• / T15 / T2 | 20 / T25 |
| | slimBit box | |
| no slim version | ก | |

Manufactured acc. to IEC 60900.

TORX®, 6-pcs. in SlimBit box

| Order-No. | | |
|-----------|------------------------------------|---|
| 43154 | | 6 |
| | T6• / T7• / T8• / T9• / T10• / T15 | |
| | slimBit box | |
| | | |

• no slim version

Manufactured acc. to IEC 60900.

TORX PLUS®, 6-pcs. in SlimBit box

| | * | 2001 |
|-----------|-------------------------------|-------------|
| Order-No. | | |
| 43155 | | 6 |
| | 6IP• / 7IP• / 8IP• / 9IP• / 1 | 0IP• / 15IP |
| | slimBit box | |

• no slim version

Manufactured acc. to IEC 60900.

Hex, 6-pcs. in SlimBit box

| Order-No. | | |
|-----------|--------------------------|---|
| 43156 | | 6 |
| | 2• / 2,5 / 3 / 4 / 5 / 6 | |
| | slimBit box | |

2831

2831

2831

Manufactured acc. to IEC 60900.

Slotted, Pozidriv 6-pcs. in SlimBit box

Order-No. 43157 6 Θ 2,5• / 3,5 / 5,5 / 6,5 (1) PZ1 / PZ2 slimBit box

• no slim version

Manufactured acc. to IEC 60900.

Slotted, PlusMinus/Pozidriv 6-pcs. in SlimBit box

| Slotted, | Slotted, PlusMinus/Pozidriv 6-pcs. in SlimBit box | | |
|--------------|---|--|--|
| Order-No |). (| | |
| 43158 | 6 | | |
| \ominus | 2,5• / 3,5 / 5,5 / 6,5 | | |
| ₩ | SL/PZ1 / SL/PZ2 | | |
| | slimBit box | | |
| • no clim vo | minn | | |

Manufactured acc. to IEC 60900.

Slotted, Phillips 6-pcs. in SlimBit box

| Slotted, | Slotted, Phillips 6-pcs. in SlimBit box | | |
|-----------|---|---|--|
| Order-No. | | | |
| 43159 | | 6 | |
| \ominus | 2,5• / 3,5 / 5,5 / 6,5 | | |
| ⊕ | PH1 / PH2 | | |
| | slimBit box | | |

• no slim version

2831

2831

Manufactured acc. to IEC 60900.

Slotted, Phillips, Pozidriv 6-pcs. in SlimBit box

| Order-No. | | |
|-----------|-------------|---|
| 43160 | | 6 |
| \ominus | 2,0• / 2,5• | |
| ⊕ | PH0• / PH1 | |
| ₩ | PZ0• / PZ1 | |
| | slimRit hoy | |

• no slim version

Manufactured acc. to IEC 60900.

| Mixed 6-pcs. in slimBit box Order-No. | | DX 2831 |
|--|-------------|----------------|
| | | |
| 44366 | | 1 |
| Θ | 2,5• | |
| ⊕ | PH1 | |
| ₩ | PZ1 | |
| * | SL/PZ1 | |
| • | T9• / T10• | |
| | slimBit-Box | |
| • no elim vereio | n | |



slimBit box









2831

2831

Increases your safety: Wiha Power slimBits ensure good, protected access to deep-set screws. Makes handling easier: Compact slimBit box with easy access and an optimal view of profiles. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.





| Order-No. | = |
|------------|-----------------|
| 44106 | 1 |
| \ominus | 5,5 |
| ⊕ | PH2 |
| ₩ | SL/PZ2 |
| (*) | T15 / T20 / T25 |
| | slimBit-Box |
| | to IFO 00000 |

Manufactured acc. to IEC 60900.

| | Slotted, | hex, | 6-pcs. | in | slimBit | box | |
|--|----------|------|--------|----|---------|-----|--|
|--|----------|------|--------|----|---------|-----|--|

| Order-No. | € |
|-----------|---------------------|
| 44107 | 1 |
| \ominus | 6,5 |
| | 2,5 / 3 / 4 / 5 / 6 |
| | slimBit-Box |

Manufactured acc. to IEC 60900.

Makes handling easier: Compact slimBit box with easy access and an optimal view of profiles. Convenient safe storage of 12 slimBits – easily taken directly from the belt.

empty, 2-pcs. with belt clip

| 2831 | -B992 |
|------|-------|

| Order-No. | H |
|---------------|---|
| 43164 | 6 |
| slimBit box I | |

slimBit box



Makes handling easier: Compact slimBit box with easy access and an optimal view of profiles.

Empty

| Order-No. | |
|-----------|---|
| 43163 | 6 |









Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Saves space: Extensive interchangeable bit system saves you space. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| \bigcirc Slotted | | | | | | 283110 |
|-------------------------------------|----------|----|-----|------------|------------|--------|
| Order-No. | Θ | mm | ⊖; | • ‡ | max. Nm | |
| 43114 | 1,5• | | 0,4 | 6,0 | 0,4 | 5 |
| 43115 | 2,0• | 75 | 0,4 | 6,0 | 0,4 | 5 |
| 34578 | 2,5• | 75 | 0,4 | 6,0 | 0,4 | 5 |
| 34579 | 3,0• | 75 | 0,5 | 6,0 | 0,6 | 5 |
| 41159 | 3,5 | 75 | 0,6 | 6,0 | 1,4 | 5 |
| 34580 | 4,0 | 75 | 0,8 | 6,0 | 2,5 | 5 |
| 34581 | 5,5 | 75 | 1,0 | 6,0 | 3,8 | 5 |
| 34582 | 6,5 | 75 | 1,2 | 6,0 | 5,5 | 5 |
| no slim version | on | | | | | |

Manufactured acc. to IEC 60900.

⊕ Phillips

| ⊕ Phillips | | | | | 283111 |
|--------------|--------------|----|------------|------------|-------------|
| Order-No. | ① | mm | • ‡ | max. Nm | (=) |
| 43116 | PH0∙ | 75 | 6,0 | 0,4 | 5 |
| 34583 | PH1 | 75 | 6,0 | 3,8 | 5 |
| 34584 | PH2 | 75 | 6,0 | 5,5 | 5 |
| Manufactured | | | | | |

| ⊕ Pozidri | v | | | 283112 | |
|------------------|------|----|------------|------------|----------|
| Order-No. | ⊕ | mm | • ‡ | max. Nm | = |
| 43117 | PZ0• | 75 | 6,0 | 0,5 | 5 |
| 34585 | PZ1 | 75 | 6,0 | 3,8 | 5 |
| 34586 | PZ2 | 75 | 6,0 | 5,5 | 5 |

Manufactured acc. to IEC 60900.

| PlusMinus/Phillips 283113 | | | | | | | | |
|---------------------------------|----------|----|------------|------------|----------|--|--|--|
| Order-No. | ⊕ | mm | • ‡ | max. Nm | (| | | |
| 34587 | SL/PH1 | 75 | 6,0 | 3,8 | 5 | | | |
| 34588 | SL/PH2 | 75 | 6,0 | 5,5 | 5 | | | |
| Manufactured acc. to IEC 60900. | | | | | | | | |

₩ PlusMinus/Pozidriv

| _ | | | | | 203114 |
|--------------|--------|----|------------|------------|--------|
| Order-No. | ₩ | mm | • ‡ | max. Nm | |
| 34589 | SL/PZ1 | 75 | 6,0 | 3,8 | 5 |
| 34590 | SL/PZ2 | 75 | 6,0 | 5,5 | 5 |
| Manufactured | | | | • | |

★TORX®

| ★ TORX [®] | | | | | 283115 |
|----------------------------|------|-----------------------|------------|------------|----------|
| Order-No. | • | l < → I | © ‡ | max. Nm | (|
| 43140 | T5• | 75 | 6,0 | 0,4 | 5 |
| 43141 | T6• | 75 | 6,0 | 0,4 | 5 |
| 43142 | T7• | 75 | | 0,4 | 5 |
| 35506 | T8• | 75 | 6,0 | 1,3 | 5 |
| 41160 | T9• | 75 | 6,0 | 1,3 | 5 |
| 35507 | T10• | | 6,0 | 3,8 | 5 |
| 35508 | T15 | 75 | 6,0 | 5,0 | 5 |
| 35509 | | 75 | , | 5,5 | 5 |
| 36071 | T25 | 75 | 6,0 | 5,5 | 5 |
| | | | | | |

Manufactured acc. to IEC 60900.

● TORX PLUS®

| TORX PLUS® 283116 | | | | | | | |
|-------------------|-------|----|------------|------------|---|--|--|
| Order-No. | | mm | • ‡ | max. Nm | | | |
| 43143 | 5IP• | 75 | 6 | 0,5 | 5 | | |
| 43144 | 6IP∙ | 75 | 6 | 0,8 | 5 | | |
| 43145 | 7IP• | 75 | 6 | 1,3 | 5 | | |
| 43146 | 8IP• | 75 | 6 | 2,0 | 5 | | |
| 43147 | 9IP• | 75 | 6 | 3,0 | 5 | | |
| 43148 | 10IP• | 75 | 6 | 4,5 | 5 | | |
| 43149 | 15IP | 75 | 6 | 5,5 | 5 | | |
| 43150 | 20IP | 75 | 6 | 5,5 | 5 | | |
| 43151 | 25IP | 75 | 6 | 5,5 | 5 | | |
| - no olima manai | | • | | ••••••• | | | |

[•] no slim version

Manufactured acc. to IEC 60900.

Square

| Square | | | | | | 283117 | | |
|---------------------------------|----|-----|----|------------|------------|--------|--|--|
| Order-No. | | | mm | • ‡ | max. Nm | | | |
| 35510 | #1 | 2,3 | 75 | 6,0 | 5,5 | 5 | | |
| 35511 | #2 | 2,8 | 75 | 6,0 | 5,5 | 5 | | |
| Manufactured acc. to IEC 60900. | | | | | | | | |

| Hex | | | | | 283118 |
|------------------|------|----|------------|------------|--------|
| Order-No. | • | mm | • ‡ | max. Nm | |
| 37222 | 1,5• | 75 | 6,0 | 0,9 | 5 |
| 37223 | 2• | 75 | 6,0 | 1,8 | 5 |
| 37224 | 2,5 | 75 | 6,0 | 3,8 | 5 |
| 37147 | 3 | 75 | 6,0 | 5,5 | 5 |
| 37225 | 4 | 75 | 6,0 | 5,5 | 5 |
| 37226 | 5 | 75 | 6,0 | 5,5 | 5 |
| 37227 | 6 | 75 | 6,0 | 5,5 | 5 |
| - no olino morai | | | | | |

[•] no slim version

Adapter TorqueVario-S electric









28799



Increases your efficiency: Fully compatible with the Wiha slimBit system. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| \cap | for | slimBits |
|----------|-----|----------|
| \smile | | 0 |

| Order-No. | 0 | 1 | mm | ₽ | | | |
|-------------------------------|---|----------|-----|----|----|--|--|
| 35870 | 6 | 3,8 | 170 | 13 | 10 | | |
| Manufactured and to IEC 60000 | | | | | | | |



Increases your efficiency: Adapter allows users to fasten with a nut driver and TorqueVario®-S electric. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Ofor 1/4" nut driver

| Ofor 1/4" | nut dr | iver | | 28799 | | | | |
|--------------------------------|--------|------------|-----|-------|----|--|--|--|
| Order-No. | • | • ‡ | mm | ф | | | | |
| 43128 | 1/4" | 3,8 | 178 | 12 | 10 | | | |
| Manufactured acc. to IFC 60900 | | | | | | | | |





Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Protects your material: Fully insulated tool reduces the risk of short circuits.

| 1/4" | hexagon | head |
|-------------------|---------|------|
|) I/ + | nexagon | neau |

| ○1/4" hex | cagon | head | 7209NS |
|-----------|-------|------|--------|
| Order-No. | 0 | ₩₩ | |
| 43088 | 4 | 42 | 1 |
| 43089 | 5 | 42 | 1 |
| 43090 | 5,5 | 42 | 1 |
| 43091 | 6 | 42 | 1 |
| 43092 | 7 | 42 | 1 |
| 43093 | 8 | 42 | 1 |
| 43094 | 9 | 42 | 1 |
| 43095 | 10 | 42 | 1 |
| 43096 | 11 | 42 | 1 |
| 43097 | 12 | 42 | 1 |
| 43098 | 13 | 42 | 1 |
| 43099 | 14 | 42 | 1 |

Manufactured according to EN/IEC 60900.







Meets your requirements: A variably settable torque covers a large application area. Lowers your costs: The correct torque protects you from warranty claims. Makes handling easier: Effortless and comfortable transmission of high torques thanks to T-handle with ComfortGrip. Increases your efficiency: The correct torque avoids damaging material and no follow-up work is necessary. Offers you full protection: Torque blades tested at 10,000 V AC and approved for 1,000 V AC.

Variable torque limit settings

| Variable torque limit settings | | | | | | | | |
|--------------------------------|------|--------------|---|-----|-------------|----------|--|--|
| Order-No. | Nm | #/= % | 0 | .A. | -0 1 | = | | |
| 43177 | 5-14 | 6 | 6 | 56 | 120 | 1 | | |

Manufactured acc. to IEC 60900. DIN EN ISO 6789

INFOBOX:

Torque T-handle TorqueVario®-S T electric



Torque T-handle TorqueVario®-S T electric

- For controlled fastening in a large range of applications.
- Torque value is continuously adjustable thanks to the adjusting tool.
- More fastening power thanks to T-handle design.
- Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.
- Certified individual item testing directly after on-site production.
- Broad selection of interchangeable blades







283793

Increases your safety: Wiha slim interchangeable blades ensure unlimited and fully-insulated access to low-lying screws. Increases your efficiency: Extensive interchangeable blade system saves you space. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

TORX® for torque screwdriver with T-handle electric

| | | | | | 283795 |
|--------------|-----|-----|----|------------|--------|
| Order-No. | | mm | - | max. Nm | |
| 38931 | T15 | 136 | 35 | 5,5 | 10 |
| 38932 | T20 | 136 | 35 | 10 | 10 |
| 38933 | T25 | 136 | 35 | 15 | 10 |
| 38934 | T27 | 136 | 35 | 15 | 10 |
| 38935 | T30 | 136 | 35 | 20 | 10 |
| 38936 | T40 | 136 | 35 | 20 | 10 |
| Manufactured | | | | | |

Hex for torque screwdriver with T-handle

| | | | | | 200700 |
|-----------|------------|-----|----|------------|--------|
| Order-No. | lacksquare | mm | - | max. Nm | |
| 38918 | 3,0 | 136 | 35 | 5,5 | 10 |
| 38919 | 4,0 | 136 | 35 | 15 | 10 |
| 38920 | 5,0 | 136 | 35 | 20 | 10 |
| 38921 | 6,0 | 136 | 35 | 20 | 10 |



Order-No.

28691





Increases your efficiency: Extensive interchangeable blade system saves you space. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

for torque screwdriver with T-handle

146

90

2899 mm

wiha @

OHex nut driver for torque screwdriver with T-handle electric

| | | | | 283794 |
|--------------|------|-----|------------|--------|
| Order-No. | 0 | mm | max. Nm | |
| 38925 | 7,0 | 136 | 5 | 10 |
| 38926 | 8,0 | 136 | 10 | 10 |
| 38927 | 9,0 | 136 | 14 | 10 |
| 38928 | 10,0 | 136 | 17 | 10 |
| 38929 | 13,0 | 136 | 20 | 10 |
| 38930 | 17,0 | 136 | 20 | 10 |
| Manufactured | | | | |



All bits in the handle, always and everywhere.



Why make things complicated, when they can be compact? The practical Wiha LiftUp electric magazine bit holder accommodates up to six common insulated slimBits - and is therefore the ideal portable companion for every electrician. The bit magazine is unlocked at the touch of a button on the two rockers, and the slimBits can easily be removed and re-inserted. A reliably locked magazine prevents anything from being lost when on the move. The rotating cap is used to make working easier: Additional axial force can be exerted by pressing strongly with the hand against the cap, while rotating around the longitudinal axis with the other hand. Uncompromising safety is ensured in production and testing according to IEC 60900, VDE/GS certifi cation and individual part testing at 10,000 V AC.

The Wiha magazine bit holder LiftUp electric is available in two content variants (SL/PH or SL/PH/PlusMinus PZ)

Increases your efficiency

Wiha LiftUp electric, saves 75 % volume and 50 % less weight for 100 % efficiency.

Protect your health

No risk of injury, all blades stowed safely inside the handle.

Offers you full protection

Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

• Increases your safety

Wiha slimBits grant unhindered, fully insulated access to deep lying screws.











Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Protect your health: No risk of injury, all blades stowed safely inside the handle. Increases your efficiency: Wiha LiftUp electric saves 75% volume and 50% less weight for 100 % efficiency. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.







sSlotted, Phillips with 6 slimBits in blister pack

SB2831

| Order-No | |
|------------|---------------------------------------|
| 38612 | 1 |
| \ominus | 1 x 2,5 / 1 x 3,0 / 1 x 4,0 / 1 x 5,5 |
| ⊕ | 1 x PH1 / 1 x PH2 |
| Manufactur | ed acc. to IEC 60900. |

Slotted, Pozidriv, PlusMinus/Pozidriv with 6 slimBits in blister pack

SB2831

| Order-N | No. | (=) |
|-----------|-----------------------------|-------------|
| 41235 | | 1 |
| \ominus | 1 x 2,5 / 1 x 3,5 / 1 x 5,5 | |
| ₩ | 1 x PZ1 / 1 x PZ2 | |
| ₩ | 1 x SL/PZ2 | |
| Manufacti | tured acc. to IEC 60900. | |

TORX® with 6 slimBits in blister pack

SB2831

| Order-No. | |
|---|---|
| 41158 | 1 |
| ① 1 x T8 / 1 x T9 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 | |











Simplifies your work: All tools securely arranged in a robust, orderly bag. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Increases your efficiency: Extensive interchangeable blade system saves you space. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Mixed, 18-pcs. in folding bag

2831

| Order-1 | No. |
|-----------|---|
| 41231 | 1 |
| 0 | Schraubendreher mit Bithalter SoftFinish® electric slimVario Stubby for slimBits, VDE and GS tested |
| 0 | Schraubendreher mit Bithalter SoftFinish® electric slimVario for slimBits, VDE and GS tested |
| \ominus | 1 x 2,5• / 1 x 3,5 / 1 x 5,5 |
| ⊕ | 1 x PH1 / 1 x PH2 |
| ₩ | 1 x PZ1 / 1 x PZ2 |
| ₩ | 1 x SL/PZ1 / 1 x SL/PZ2 |
| • | 1 x T9• / 1 x T10• / 1 x T15 / 1 x T20 |
| | 1x3/1x4/1x5 |

• no slim version











Simplifies your work: All tools securely arranged in a robust, orderly bag. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Increases your efficiency: Extensive interchangeable blade system saves you space. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Slotted, Phillips, Pozidriv, 9-pcs. in folding bag

2831

| Order-N | o. (|
|-----------|---|
| 41232 | 1 |
| 0 | Screwdriver with bit holder SoftFinish® electric slimVario Stubby for slimBits, VDE and GS tested |
| 0 | Screwdriver with bit holder SoftFinish® electric slimVario for slimBits, VDE and GS tested |
| \ominus | 1 x 2,5• / 1 x 3,5 / 1 x 5,5 |
| ⊕ | 1 x PH1 / 1 x PH2 |
| ₩ | 1 x PZ1 / 1 x PZ2 |

no slim version
 Manufactured acc. to IEC 60900.

Slotted, Pozidriv, PlusMinus/Pozidriv, 9-pcs. in folding bag

2831

| Order-N | No. |
|----------|---|
| 41233 | 1 |
| 0 | Screwdriver with bit holder SoftFinish® electric slimVario Stubby for slimBits, VDE and GS tested |
| 0 | Screwdriver with bit holder SoftFinish® electric slimVario for slimBits, VDE and GS tested |
| Θ | 1 x 2,5• / 1 x 3,5 / 1 x 5,5 |
| ₩ | 1 x PZ1 / 1 x PZ2 |
| ₩ | 1 x SL/PZ1 / 1 x SL/PZ2 |

• no slim version Manufactured acc. to IEC 60900.













Simplifies your work: All tools securely arranged in a robust, orderly bag. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Protects your material: Fully insulated nut driver reduces the risk of short circuits.

mixed, 13-pcs. in folding bag

7209N

| Order-N | 0. |
|-----------|--|
| 43467 | 1 |
| 0 | 1 x SoftFinish® electric screwdriver handle, VDE and GS tested |
| 0 | 1 x Extension slimVario® electric for slimBits, VDE and GS tested |
| | 1 x slimVario® electric adapter for 1/4" nut driver |
| \ominus | 1 x 3,5 / 1 x 5,5 |
| 0 | 1 x 5 / 1 x 5,5 / 1 x 6 / 1 x 7 / 1 x 8 / 1 x 10 / 1 x 11 / 1 x 13 |









2831-03

Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Protect your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

4-pcs. with slimBits

Order-No.

43449

1 x Screwdriver with bit holder SoftFinish® slimVario® electric for slimBits, VDE and GS tested

0 Θ 1 x 5,5

(1 x SL/PZ1 / 1 x SL/PZ2

Manufactured acc. to IEC 60900.

Screwdriver with bit holder set electric slimVario®









Simplifies your work: Compact handle - maximum power. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Protected work in constricted spaces. Increases your efficiency: Fully compatible with the Wiha slimBit system. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Stubby, 4 pieces with slimBits

2831

| Order-N | No. |
|-----------|---|
| 41230 | 1 |
| 0 | Screwdriver with bit holder SoftFinish® electric slimVario Stubby for slimBits, VDE and GS tested |
| \ominus | 3,5 x 75 |
| ⊕ | PH2 x 75 |
| ₩ | SL/PZ2 x 75 |
| Manufact | tured acc. to IEC 60900. |







Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Increases your efficiency: Fully compatible with the Wiha slimBit system. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your efficiency: Careful workmanship and controlled power transmission thanks to the slim handle with soft grip. Particularly suitable for use with slimBit profiles.

4-pcs. with slimBits

| Order-N | lo. |
|----------|--|
| 43167 | 5 |
| 0 | 1 x Fine screwdriver PicoFinish® slimVario® electric for slimBits, VDE and GS tested |
| Θ | 1 x 2,0• |
| ⊕ | 1 x PH0• |
| ₩ | 1 x PZ0• |

• no slim version













Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Makes handling easier: Compact slimBit box with easy access and an optimal view of profiles. Convenient safe storage of 12 slimBits – easily taken directly from the belt. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.





TORX®, TORX PLUS®, 12-pcs. in SlimBit box

2831

| Order-No. | ± | |
|---|--|--|
| 43161 | 6 | |
| | 6IP• / 7IP• / 8IP• / 9IP• / 10IP• / 15IP | |
| • | T6• / T7• / T8• / T9• / T10• / T15 | |
| *************************************** | slimBit box | |
| • no slim version | | |

Manufactured acc. to IEC 60900.

Slotted, Phillips, Pozidriv, PlusMinus/Pozidriv, TORX® 12-pcs. in SlimBit box

2831

| 6 |
|------------------------|
| |
| 3,5 / 5,5 |
| PH1 / PH2 |
| PZ1 / PZ2 |
| SL/PZ1 / SL/PZ2 |
| T10• / T15 / T20 / T25 |
| slimBit box |
| |

• no slim version

Manufactured acc. to IEC 60900.

INFOBOX: slimBit box





slimBit box

- Compact slimBit box with easy access and an optimal view of profiles.
- Suitable for storing Wiha slimBits. Ideal for mobile use.
- Wiha slimBits ensure unrestricted and fully insulated access to low-lying screws.
- Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.



2831

2821

2831









Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Makes handling easier: Compact slimBit box with easy access and an optimal view of profiles. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.





| Slotted. | 6-pcs. | in | SlimBit | box |
|----------|--------|----|---------|-----|

| Order-No. | | |
|-----------|-------------------------------------|---|
| 43152 | | 6 |
| \ominus | 2,0• / 2,5• / 3,5 / 4,0 / 5,5 / 6,5 | |
| | slimBit box | |

• no slim version

Manufactured acc. to IEC 60900.

TORX®, 6-pcs. in SlimBit box

| Order-No. | | |
|-----------------|-------------|-----------------------|
| 43153 | | 6 |
| (*) | | 10• / T15 / T20 / T25 |
| | slimBit box | |
| no slim version | | |

Manufactured acc. to IEC 60900.

TORX®, 6-pcs. in SlimBit box

| TORX®, 6-pcs. in SlimBit box | | 2831 |
|------------------------------|-------------------------|------|
| Order-No | | |
| 43154 | | 6 |
| (*) | T6• / T7• / T8• / T9• / | |
| | slimBit box | |
| | | |

no slim version

Manufactured acc. to IEC 60900.

TORX PLUS®, 6-pcs. in SlimBit box

| Order-No. | | |
|-----------|---------------------------|---|
| 43155 | | 6 |
| | 6IP• / 7IP• / 8IP• / 9IP• | |
| | slimBit box | |

• no slim version

Manufactured acc. to IEC 60900.

Hex, 6-pcs. in SlimBit box

| Order-No. | | = |
|-----------|--------------------------|----------|
| 43156 | | 6 |
| | 2• / 2,5 / 3 / 4 / 5 / 6 | |
| | slimBit box | |

Manufactured acc. to IEC 60900.

Slotted, Pozidriv 6-pcs. in SlimBit box Order-No.

43157 6 \ominus 2,5• / 3,5 / 5,5 / 6,5

(1) PZ1 / PZ2

slimBit box

• no slim version Manufactured acc. to IFC 60900.

Slotted, PlusMinus/Pozidriv 6-pcs. in SlimBit box

| | • | 2001 |
|---|------------------------|------|
| Order-No. | | |
| 43158 | | 6 |
| \ominus | 2,5• / 3,5 / 5,5 / 6,5 | |
| ₩ | SL/PZ1 / SL/PZ2 | |
| *************************************** | slimBit box | |
| a no olivo vovole | | |

Slotted, Phillips 6-pcs. in SlimBit box

| Slotted, P | Slotted, Phillips 6-pcs. in SlimBit box 283 | |
|------------|---|---|
| Order-No. | | |
| 43159 | | 6 |
| \ominus | 2,5• / 3,5 / 5,5 / 6,5 | |
| ⊕ | PH1 / PH2 | |
| | slimBit box | |

2831

2831

Manufactured acc. to IEC 60900.

Manufactured acc. to IEC 60900.

Slotted, Phillips, Pozidriv 6-pcs. in SlimBit box

| Order-No. | | |
|----------------|-------------|---|
| 43160 | | 6 |
| \ominus | 2,0• / 2,5• | |
| (1) | PH0• / PH1 | |
| ₩ | PZ0• / PZ1 | |
| | slimBit box | |

• no slim version

Manufactured acc. to IEC 60900.

Mixed 6-nce in slimBit hov

| Mixed 6-pcs. in slimBit box | | ox 2831 |
|-----------------------------|-------------|----------------|
| Order-No. | | € |
| 44366 | | 1 |
| \ominus | 2,5• | |
| ⊕ | PH1 | |
| ₩ | PZ1 | |
| ₩ | SL/PZ1 | |
| * | T9• / T10• | |
| | slimBit-Box | |
| | ***** | |

no slim version

Power slimBit electric bit set



slimBit box







Increases your safety: Wiha Power slimBits ensure good, protected access to deep-set screws. Makes handling easier: Compact slimBit an optimal view of profiles. Offers you full easily taken to

protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.





Mixed 6-pcs. in slimBit box

2831

| Order-No. | |
|-----------|-----------------|
| 44106 | 1 |
| \ominus | 5,5 |
| \oplus | PH2 |
| ₩ | SL/PZ2 |
| | T15 / T20 / T25 |
| | slimBit-Box |

Manufactured acc. to IEC 60900.

Manufactured acc. to IEC 60900.

Slotted, hex, 6-pcs. in slimBit box

283

| Order-No. | | | |
|-----------|---------------------|---|--|
| 44107 | | 1 | |
| \ominus | 6,5 | | |
| | 2,5 / 3 / 4 / 5 / 6 | | |
| | slimBit-Box | | |



Makes handling easier: Compact slimBit box with easy access and an optimal view of profiles. Convenient safe storage of 12 slimBits – easily taken directly from the belt.

empty, 2-pcs. with belt clip

2831-B992

| Order-No. | |
|-------------------|---|
| 43164 | 6 |
| slimBit box Empty | |

slimBit box



Makes handling easier: Compact slimBit box with easy access and an optimal view of profiles.

Empty

| Order-No. | |
|-----------|---|
| 43163 | 6 |











Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Saves space: Extensive interchangeable bit system saves you space. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| \bigcirc Slotted | | | | | | 283110 |
|-------------------------------------|----------|--------------------|-----|------------|---|---|
| Order-No. | Θ | l ∢ ≯ l | ⇔ | © 1 | max. Nm | (11) |
| 43114 | 1,5• | | 0,4 | 6,0 | 0,4 | 5 |
| 43115 | 2,0• | 75 | 0,4 | 6,0 | 0,4 | 5 |
| 34578 | 2,5• | 75 | 0,4 | 6,0 | 0,4 | 5 |
| 34579 | 3,0• | 75 | 0,5 | 6,0 | 0,6 | 5 |
| 41159 | 3,5 | 75 | 0,6 | 6,0 | 1,4 | 5 |
| 34580 | 4,0 | 75 | 0,8 | 6,0 | 2,5 | 5 |
| 34581 | 5,5 | 75 | 1,0 | 6,0 | 3,8 | 5 |
| 34582 | 6,5 | 75 | 1,2 | 6,0 | 5,5 | 5 |
| no slim version | วท | | | | *************************************** | *************************************** |

Manufactured acc. to IEC 60900.

| ⊕ Phillips | | | | 283111 |
|---|---|-----|-----|--------|
| *************************************** | | | | |
| - 14 | · | may | , , | |

| Order-No. | ⊕ | mm | • ‡ | max. Nm | |
|-----------|------------|----|------------|------------|---|
| 43116 | PH0∙ | 75 | 6,0 | 0,4 | 5 |
| 34583 | PH1 | 75 | 6,0 | 3,8 | 5 |
| 34584 | PH2 | 75 | 6,0 | 5,5 | 5 |
| | acc to IE0 | | | | |

| ⊕ Pozidri | v | | | | 283112 |
|------------------|------|----|------------|---|--------|
| Order-No. | ⊕ | mm | • ‡ | max. Nm | |
| 43117 | PZ0∙ | 75 | 6,0 | 0,5 | 5 |
| 34585 | PZ1 | 75 | 6,0 | 3,8 | 5 |
| 34586 | PZ2 | 75 | 6,0 | 5,5 | 5 |
| Manufactured | | | | *************************************** | |

| PlusMinus/Phillips |
|--------------------|
| ······ |

| Order-No. | ⊕ | mm | ① 1 | max. Nm | | | |
|---------------------------------|----------|----|------------|------------|---|--|--|
| 34587 | SL/PH1 | 75 | 6,0 | 3,8 | 5 | | |
| 34588 | SL/PH2 | 75 | 6,0 | 5,5 | 5 | | |
| Manufactured acc. to IEC 60900. | | | | | | | |

| PlusMinus/Pozidriv | |
|--------------------|--|
|--------------------|--|

| Piusiviini | | 283114 | | | |
|------------|--------|--------|------------|------------|---|
| Order-No. | ₩ | mm | ① 1 | max. Nm | |
| 34589 | SL/PZ1 | 75 | 6,0 | 3,8 | 5 |
| 34590 | SL/PZ2 | 75 | 6,0 | 5,5 | 5 |

Manufactured acc. to IEC 60900.

| * IORX® | | | | | 283115 |
|-----------|-----|-----|------------|------------|--------|
| Order-No. | • | mm⊓ | • ‡ | max. Nm | |
| 43140 | T5• | 75 | 6,0 | 0,4 | 5 |
| 43141 | T6• | 75 | 6,0 | 0,4 | 5 |
| 43142 | T7• | 75 | 6,0 | 0,4 | 5 |
| 35506 | T8• | 75 | 6,0 | 1,3 | 5 |

| 43141 | T6• | 75 | 6,0 | 0,4 | 5 |
|-------|------|----|-----|-----|---|
| 43142 | T7• | 75 | 6,0 | 0,4 | 5 |
| 35506 | T8• | 75 | 6,0 | 1,3 | 5 |
| 41160 | T9• | 75 | 6,0 | 1,3 | 5 |
| 35507 | T10• | 75 | 6,0 | 3,8 | 5 |
| 35508 | T15 | 75 | 6,0 | 5,0 | 5 |
| 35509 | T20 | 75 | 6,0 | 5,5 | 5 |
| 36071 | T25 | 75 | 6.0 | 5.5 | 5 |

★TORX®

● TORX PLUS®

| _ | | | | | 203110 |
|-----------------|-------|-----|------------|------------|--------|
| Order-No. | | mm⊓ | • ‡ | max. Nm | |
| 43143 | 5IP• | 75 | 6 | 0,5 | 5 |
| 43144 | 6IP∙ | 75 | 6 | 0,8 | 5 |
| 43145 | 7IP• | 75 | 6 | 1,3 | 5 |
| 43146 | 8IP• | 75 | 6 | 2,0 | 5 |
| 43147 | 9IP• | 75 | 6 | 3,0 | 5 |
| 43148 | 10IP• | 75 | 6 | 4,5 | 5 |
| 43149 | 15IP | 75 | 6 | 5,5 | 5 |
| 43150 | 20IP | 75 | 6 | 5,5 | 5 |
| 43151 | 25IP | 75 | 6 | 5,5 | 5 |
| • no clim vorci | | • | | | |

Hex

283113

| Tiex | | | | | 283118 |
|-------------------------------------|------|---|------------|------------|--------------|
| Order-No. | • | mm⊓ | ① ‡ | max. Nm | \(\) |
| 37222 | 1,5• | 75 | 6,0 | 0,9 | 5 |
| 37223 | 2• | 75 | 6,0 | 1,8 | 5 |
| 37224 | 2,5 | 75 | 6,0 | 3,8 | 5 |
| 37147 | 3 | 75 | 6,0 | 5,5 | 5 |
| 37225 | 4 | 75 | 6,0 | 5,5 | 5 |
| 37226 | 5 | 75 | 6,0 | 5,5 | 5 |
| 37227 | 6 | 75 | 6,0 | 5,5 | 5 |
| no slim version | | *************************************** | | | |

Manufactured acc. to IEC 60900.

Square

| Square | | | | | | 283117 |
|----------------|-----------|---------|----|------------|------------|--------|
| Order-No. | | | mm | • ‡ | max. Nm | |
| 35510 | #1 | 2,3 | 75 | 6,0 | 5,5 | 5 |
| | | | | 6,0 | 5,5 | 5 |
| Manufactured a | cc. to IE | C 60900 | | | | |

Manufactured acc. to IEC 60900.

Manufactured acc. to IEC 60900.



slimVario® electric adapter

for 1/4" nut driver





Improved access: Deep-set screws can be reached easily. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.


Increases your efficiency: Adapter allows nut driver to be fastened with speedE® and slimVario® handles. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

for slimBits

| 283 | 1 | -0 | ١ |
|-----|---|----|---|
| | | | |

| Order-No. | 0 | l ∢ → l | фъ | |
|-----------|---|--------------------|-------|---|
| 43292 | 6 | 69,5 | - , - | 6 |

2831-08 Order-No. 0 6 43139 6 59 1/4" 12.4 1/4"

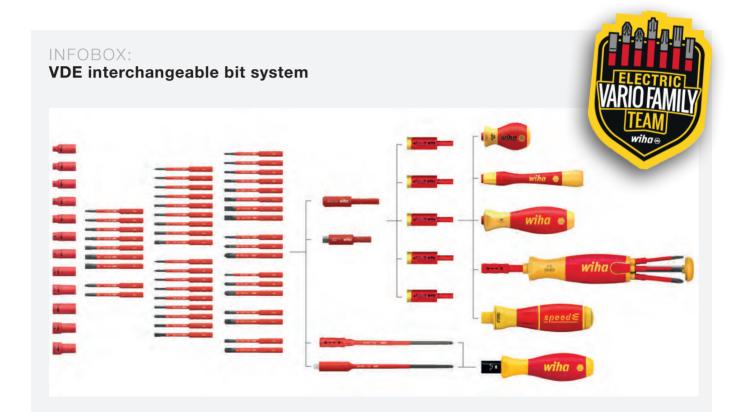

Can be used with these slimBits

1,5 / 2,0 / 2,5 / 3,0 / 3,5 / 4,0 / 5,5 / 6,5 PH0/PH1/PH2 PZ0 / PZ1 / PZ2 SL/PZ1/SL/PZ2 T5 / T6 / T7 / T8 / T9 / T10 / T15 / T20 / T25 IP5 / IP6 / IP7 / IP8 / IP9 / IP10 / IP15 / IP20 / IP25 1,5/2/2,5/3/4/5/6


Robertson 1/2

VDE interchangeable bit system

- Compact VDE bit sets: holder + slimBit (length 75 mm))
- Wiha slimBits ensure good, protected access to deep-set screws.
- slimBits tested at 10,000 V AC and approved for 1,000 V AC.
- Space saved thanks to extensive interchangeable bit system and nut driver inserts.

VDE torque system

• Controlled tightening of electrical screw connections

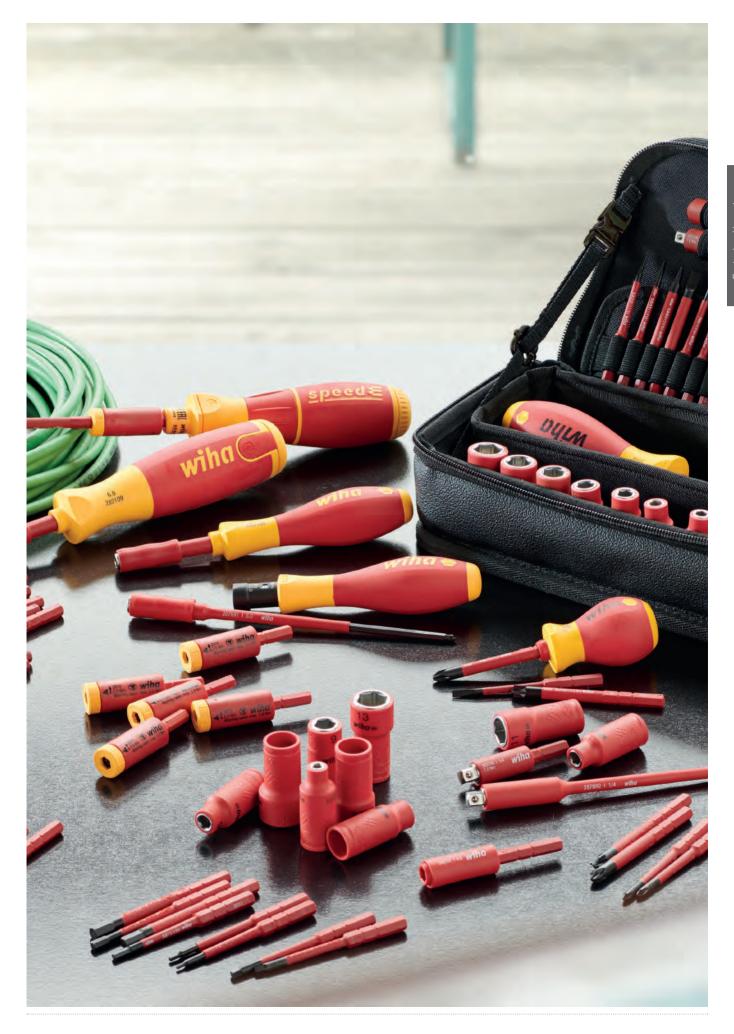

Easier and protected access to deep-set screws.



Wiha slimTECHNOLOGY enables blades to be up to 33 % slimmer due to the integrated insulation in the blade. Lowlying screw and spring elements in the critical working area can therefore be reached easily. The high-quality blade insulation guarantees safe work in on live parts up to 1,000 V AC/1,500 V DC. Additional safety is assured as each individual screwdriver is tested in a water bath at 10,000 V AC in accordance with IEC 60900.

Roll-off protection, the patented, SoftFinish® handle design that protects the hands and muscles from strain, and the unique handle-length concept for optimal balance between power and control all ensure healthier and more efficient work.

The system for every electrician. Available as a screwdriver or as an interchangeable bit system

Increases your efficiency

Unique Wiha handle-length concept for optimum balance of torque and control.

Protect your health

With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs.


Offers you full protection

Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

• Increases your safety

Wiha slim blades grant unhindered, fully insulated access to low lying screws.



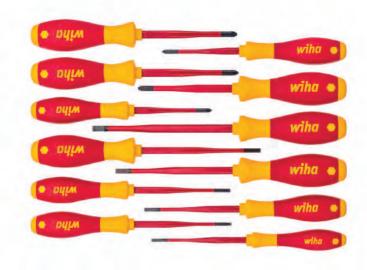







Increases your safety: Wiha slim blades ensure unlimited, protected access to deep-set screws. Protect your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: Unique Wiha handle-length concept for optimum balance of torque and control. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

assorted 12-pcs. 3201

| Order-N | |
|------------|---|
| 41003 | 1 |
| \ominus | 3,5 x 100 / 4,0 x 100 / 5,5 x 125 / 6,5 x 150 |
| ⊕ | PH1 x 80 / PH2 x 100 |
| ₩ | PZ1 x 80 / PZ2 x 100 |
| ₩ | SL/PZ2 x 100 |
| (*) | T15 x 100 / T20 x 100 / T25 x 125 |

INFOBOX:

Handle size concept





Wiha SoftFinish® handle sizes

- Every Wiha handle optimally balances guidance, speed and torque for the respective fastening task.
- Quick-turning Motor skills are consistently taken into consideration.
- Maximum power transmission: comfortable and loss-free transmission of physical strength, even during intensive fastening.
- The power-turning and quick-turning zones vary significantly

over the four handle sizes in various forms.

 The Wiha SoftFinish screwdrivers enable work that is kind on the hands and muscles and is therefore recommended by doctors and therapists from the AGR.









Increases your safety: Wiha slim blades ensure unlimited, protected access to deep-set screws. Protect your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: Unique Wiha handle-length concept for optimum balance of torque and control. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| Order-N | No. | | |
|---|---|----------|-----|
| 35389 | | 1 | |
| Θ | 3,5 × 100 / 4,0 × 100 / 5,5 × 125 / 6,5 × 150 | | |
| <u> </u> | PH1 x 80 / PH2 x 100 | | |
| | ured acc. to IEC 60900. | | |
| Slotted | d, Pozidriv 6-pcs. | | 320 |
| Order-N | No. | | |
| 36455 | | 1 | |
| Θ | 3,5 x 100 / 4,0 x 100 / 5,5 x 125 / 6,5 x 150 | | |
| \$\ | PZ1 x 80 / PZ2 x 100 | | |
| | | | |
| | rz1 x 60 / rzz x 100 ured acc. to IEC 60900. | | |
| | | | |
| | | | |
| Manufactu | ured acc. to IEC 60900. | | |
| Manufacto | ured acc. to IEC 60900. | | 320 |
| Slotted Order-N | ured acc. to IEC 60900. | ≟ | 320 |
| Slotted Order-N 38362 | ured acc. to IEC 60900. | 1 | 320 |
| Slotted Order-N | ured acc. to IEC 60900. | | 320 |
| Slotted Order-N 38362 | d, Phillips, PlusMinus/Pozidriv 6-pcs. | | 320 |
| Slotted Order-N 38362 ⊕ ⊕ | 1, Phillips, PlusMinus/Pozidriv 6-pcs. No. 3,5 x 100 / 4,0 x 100 / 5,5 x 125 PH1 x 80 / PH2 x 100 SL/PZ2 x 100 | | 320 |
| Slotted Order-N 38362 ⊕ ⊕ | d, Phillips, PlusMinus/Pozidriv 6-pcs. No. 3,5 x 100 / 4,0 x 100 / 5,5 x 125 PH1 x 80 / PH2 x 100 | | 320 |
| Slotted Order-N 38362 ⊕ ∰ Manufacti | 1, Phillips, PlusMinus/Pozidriv 6-pcs. No. 3,5 x 100 / 4,0 x 100 / 5,5 x 125 PH1 x 80 / PH2 x 100 SL/PZ2 x 100 | | 320 |
| Slotted Order-N 38362 ⊕ ∰ Manufacti | d, Phillips, PlusMinus/Pozidriv 6-pcs. No. 3,5 x 100 / 4,0 x 100 / 5,5 x 125 PH1 x 80 / PH2 x 100 SL/PZ2 x 100 ured acc. to IEC 60900. | | |
| Slotted Order-N 38362 ⊕ Manufactt TORX® | d, Phillips, PlusMinus/Pozidriv 6-pcs. No. 3,5 x 100 / 4,0 x 100 / 5,5 x 125 PH1 x 80 / PH2 x 100 SL/PZ2 x 100 ured acc. to IEC 60900. | 1 | |
| Slotted Order-N 38362 ⊕ Manufacti TORX® | d, Phillips, PlusMinus/Pozidriv 6-pcs. No. 3,5 x 100 / 4,0 x 100 / 5,5 x 125 PH1 x 80 / PH2 x 100 SL/PZ2 x 100 ured acc. to IEC 60900. | | |









3281

Increases your safety: Wiha slim blades ensure unlimited, protected access to deep-set screws. Protect your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: Unique Wiha handle-length concept for optimum balance of torque and control. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

3211

3241

⊖Slotted

| 0 | | | | | | 3201 |
|-----------|-----------|---------|-------------|-----|-------------|------|
| Order-No. | \ominus | | \ominus : | mm | | |
| 35446 | 3,5 | 100 | 0,6 | 204 | 23 | 10 |
| 35390 | 4,0 | 100 | 0,8 | 211 | 30 | 10 |
| 35501 | 4,5 | 125 | 1,0 | 236 | 30 | 10 |
| 35391 | 5,5 | 125 | 1,0 | 243 | 36 | 10 |
| 35392 | 6,5 | 150 | 1,2 | 268 | 36 | 10 |
| | | | | | | |

DIN ISO 2380. Manufactured acc. to IEC 60900.

Phillips

| Order-No. | | — | | | | | | | |
|--|-----|-----|-----|----|----|--|--|--|--|
| 35393 | PH1 | 80 | 191 | 30 | 10 | | | | |
| 35394 | PH2 | 100 | 218 | 36 | 10 | | | | |
| DIN ISO 8764-PH. Manufactured acc. to IEC 60900. | | | | | | | | | |

Pozidriv

| Order-No. | ₩ | == | mm | - ÷ | SB | | | | |
|--|-----|-----|-----|------------|----|----|--|--|--|
| 35395 | PZ1 | 80 | 191 | 30 | | 10 | | | |
| 35396 | PZ2 | 100 | 218 | 36 | | 10 | | | |
| DIN ISO 8764-PZ. Manufactured acc. to IEC 60900. | | | | | | | | | |

PlusMinus/Phillips

| _ | | | | | 3271 | | | |
|---------------------------------|----------|------------|-----|-----------|------|--|--|--|
| Order-No. | ⊕ | ⇒ • | mm | ‡ | | | | |
| 35502 | SL/PH1 | 80 | 191 | 30 | 10 | | | |
| 35503 | SL/PH2 | 100 | 218 | 36 | 10 | | | |
| Manufactured acc. to IEC 60900. | | | | | | | | |

PlusMinus/Pozidriv

| | - | | | SB 🖃 | 3 |
|------------|------|-------|----|------|----|
| /PZ1 8 | 30 1 | 191 : | 30 | | 10 |
| /PZ2 1 | 00 2 | 218 | 36 | | 10 |

TORX® Tamper Resistant (with hole)

| • | | | (with hole) | 3251 TR | |
|--------------|------------|---------|-------------|---------------|------------|
| Order-No. | • | | mm | — | (=) |
| 41141 | T10H | 100 | 204 | 23 | 10 |
| 41142 | T15H | 100 | 211 | 30 | 10 |
| 41143 | T20H | 100 | 211 | 30 | 10 |
| 41144 | T25H | 125 | 243 | 36 | 10 |
| 41145 | T27H | 125 | 243 | 36 | 10 |
| 41146 | T30H | 125 | 243 | 36 | 10 |
| 41147 | | 150 | | 36 | 10 |
| Manufactured | acc. to IE | C 60900 | | ••••• | |

★TORX®

| • | | | | | 3251 |
|---------------|----------|-----------|-----------|-------------|----------|
| Order-No. | | | mm | | = |
| 36536 | T10 | 100 | 204 | 23 | 10 |
| 36537 | T15 | 100 | 211 | 30 | 10 |
| 36538 | T20 | 100 | 211 | 30 | 10 |
| 36539 | T25 | 125 | 243 | 36 | 10 |
| 36540 | T27 | 125 | 243 | 36 | 10 |
| 36541 | T30 | 125 | 243 | 36 | 10 |
| 36542 | T40 | 150 | 268 | 36 | 10 |
| DIN ISO 8764- | -PH. Man | ufactured | acc. to I | FC 60900 | |

Square

| | | | | | | 3581 |
|--------------|-----------|-----|------------|-----|-----------|------|
| Order-No. | | | ≂ = | mm⊓ | — <u></u> | |
| 35504 | #1 | 2,3 | 100 | 211 | 30 | 10 |
| 35505 | #2 | 2,8 | 125 | 243 | 36 | 10 |
| Manufactured | acc to IF | | | | | |





Protect your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Unique Wiha handle-length concept for optimum balance of torque and control. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| 0.01100 | d, Phillips 7-pcs. | | 320N |
|-----------|---|------------|---|
| Order-N | No. | | |
| 00834 | | 1 | |
| \ominus | 2,5 x 75 / 4,0 x 100 / 5,5 x 125 / 6,5 x 150 | | |
| ⊕ | PH1 x 80 / PH2 x 100 | | |
| Manufactu | ured acc. to IEC 60900. | | |
| Slotted | d, Phillips 6-pcs. | | 320N |
| Order-N | No. | | ••••••••••••••••••••••••••••••••••••••• |
| 00833 | | 10 | |
| \ominus | 3,0 x 100 / 4,0 x 100 / 5,5 x 125 / 6,5 x 150 | | |
| ⊕ | PH1 x 80 / PH2 x 100 | | |
| Manufactu | ured acc. to IEC 60900. | | |
| Slotted | d, Pozidriv 6-pcs. | | 320N |
| Order-N | No. | (±) | |
| 25477 | | 1 | |
| | 2,5 x 75 / 3,5 x 100 / 4,5 x 125 / 5,5 x 125 | | ······································ |
| \ominus | 2,5 x 75 / 5,5 x 100 / 4,5 x 125 / 5,5 x 125 | | |







327

Protect your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Unique Wiha handle-length concept for optimum balance of torque and control. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| ${\color{red} \ominus } \textbf{Slotted}$ | | | | | | 320N |
|---|----------|-----|-----|-------------------|------------|------|
| Order-No. | Θ | == | ⊖; | ı ← →ı | — ÷ | |
| 00819 | 2,0 | 60 | 0,4 | 164 | 23 | 10 |
| 00820 | 2,5 | 75 | 0,4 | 179 | 23 | 10 |
| 00821 | 3,0 | 100 | 0,5 | 204 | 23 | 10 |
| 00822 | 3,5 | 100 | 0,6 | 204 | 23 | 10 |
| 00823 | 4,0 | 100 | 0,8 | 211 | 30 | 10 |
| 00824 | 4,5● | 125 | 1,0 | 236 | 30 | 10 |
| 00825 | 4,5● | 175 | 1,0 | 286 | 30 | 5 |
| 31863 | 4,5 | 200 | 1,0 | 311 | 30 | 5 |
| 00826 | 5,5 | 125 | 1,0 | 243 | 36 | 10 |
| 00827 | 5,5• | 175 | 1,0 | 293 | 36 | 5 |
| 00828 | 6,0• | 150 | 1,2 | 268 | 36 | 10 |
| 00829 | 6,5 | 150 | 1,2 | 268 | 36 | 10 |
| 00830 | 8,0 | 175 | 1,2 | 299 | 41 | 10 |
| 00831 | 8,0 | 175 | 1,6 | 299 | 41 | 10 |
| 00832 | 10,0• | 200 | 1,6 | 324 | 41 | 5 |

Additional dimension. Non-DIN size. Manufactured acc. to IEC 60900.

\bigoplus Phillips

| | | | | | - |
|----------------|--------------|----------|--|------------|----|
| Order-No. | 1 | = | mm | — → | |
| 00846 | PH0 | 60 | 164 | 23 | 10 |
| 00847 | PH1 | 80 | 191 | 30 | 10 |
| 00848 | PH2 | 100 | 218 | 36 | 10 |
| 00849 | РН3 | 150 | 268 | 41 | 10 |
| 00850 | PH4 | 200 | 318 | 41 | 5 |
| Manufactured a | | | •····································· | ······ | |

Pozidriv

| Order-No. | ₩ | ≕ ■ | mm⊓ | | (=) |
|-----------|------------|------------|-----|-------------|-------------|
| 00877 | PZ0 | 60 | 164 | 23 | 10 |
| 00878 | PZ1 | 80 | 191 | 30 | 10 |
| 00879 | PZ2 | 100 | 218 | 36 | 10 |
| 08800 | PZ3 | 150 | 324 | 41 | 5 |
| | acc, to IE | | | | |

PlusMinus/Phillips

| Order-No. | ⊕ | = | mm | | |
|----------------|----------|----------|-----|-------------|----|
| 30716 | SL/PH1 | 80 | 191 | 30 | 10 |
| 30715 | SL/PH2 | | 218 | 36 | 10 |
| Manufactured a | | | | | |

PlusMinus/Pozidriv

| | | | | | 020 |
|-----------------|------------------|----------|-----|----------|------------|
| Order-No. | ₩ | = | mm | — | (=) |
| 30700 | SL/PZ1 | 80 | 191 | 30 | 10 |
| 30701 | SL/PZ2 | 100 | 218 | 36 | 10 |
| Manufactured ad | cc. to IFC 60900 | | • | | |

(★) TORX®

| TORX® | | | | | 325 |
|----------------|----|------------|---------------------------------------|-------------|---|
| Order-No. | | ≕ ■ | mm | | |
| 03760 | T5 | 60 | 164 | 23 | 10 |
| 03761 | T6 | 60 | 164 | 23 | 10 |
| 03762 | T7 | 60 | 164 | 23 | 10 |
| 00881 | T8 | 60 | 164 | 23 | 10 |
| 00882 | Т9 | 60 | 164 | 23 | 10 |
| Manufactured a | | C 60900 | · · · · · · · · · · · · · · · · · · · | •••••• | *************************************** |

Hex

321N

324

| Hex | | | | | 323N |
|--------------|------------|---------|------|---|------|
| Order-No. | • | | mm l | _ | |
| 30361 | 2,5 | 75 | 179 | 23 | 10 |
| 30362 | 3,0 | 75 | 179 | 23 | 10 |
| 30363 | 4,0 | 75 | 186 | 30 | 10 |
| 30364 | 5,0 | 75 | 186 | 30 | 10 |
| 30365 | 6,0 | 100 | 218 | 36 | 10 |
| 30366 | 8,0 | 100 | 218 | 36 | 10 |
| Manufactured | acc. to IE | C 60900 | | • | |

Square

| Square | | | | | | | | | |
|--------|---------------------------------|----|-----|-----------|-----|-------------|----|--|--|
| | Order-No. | | | ■ | mm⊓ | | | | |
| | 32396 | #1 | 2,3 | 100 | 211 | 30 | 10 | | |
| | 32397 | #2 | 2,8 | 150 | 268 | 36 | 10 | | |
| | Manufactured acc. to IEC 60900. | | | | | | | | |







322 K5

Protect your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Unique Wiha handle-length concept for optimum balance of torque and control. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Hexagon nut driver 5-pcs.

| Order-No. | | | | | | |
|---------------------------------|-------------------------------|-----------------------|--|--|--|--|
| 29466 | | 1 | | | | |
| 0 | 5,5 x 125 / 7 x 125 / 8 x 125 | / 10 x 125 / 13 x 125 | | | | |
| Manufactured acc. to IEC 60900. | | | | | | |







322

Protect your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Unique Wiha handle-length concept for optimum balance of torque and control. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

OHex nut driver

| | | | | | | 022 |
|-----------|-----|------------|-----|------------|------|-----|
| Order-No. | 0 | ≂ ■ | mm | - ÷ | ф | |
| 00853 | 4 | 125 | 236 | 30 | 10,2 | 10 |
| 00855 | 5 | 125 | 236 | 30 | 11,2 | 10 |
| 00856 | 5,5 | 125 | 236 | 30 | 11,2 | 10 |
| 00857 | 6 | 125 | 236 | 30 | 12,2 | 10 |
| 00858 | 7 | 125 | 243 | 36 | 14,5 | 10 |
| 00859 | 8 | 125 | 243 | 36 | 15,2 | 10 |
| 00860 | 9 | 125 | 243 | 36 | 16,0 | 10 |
| 00861 | 10 | 125 | 243 | 36 | 17,2 | 10 |
| 00862 | 11 | 125 | 243 | 41 | 19,2 | 10 |
| 00863 | 12 | 125 | 243 | 41 | 20,2 | 10 |
| 00864 | 13 | 125 | 243 | 41 | 22,2 | 10 |
| 00865 | 14 | 125 | 243 | 41 | 23,2 | 10 |
| 00866 | 15 | 125 | 243 | 41 | 25,2 | 10 |
| 00867 | 16 | 125 | 243 | 41 | 25,2 | 10 |

27,2

10

Manufactured acc. to IEC 60900.

125

243

00868

INFOBOX: Combination profiles





PlusMinus.

- The special PlusMinus/Pozidriv profile is ideal for PlusMinus terminal screws.
- The combination profile reduces slipping out and guarantees a higher torque transmission.







Simplifies your work: With a practical plastic holder to hang up or stand on a surface. Makes handling easier: Extra-long rotating cap ensures optimum feed. Increases your efficiency: Screwdriver handle size concept for optimal balance between precision and control. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your efficiency: Careful workmanship and controlled power transmission thanks to the slim handle with soft grip.

Makes handling easier: Extra-long rotating cap ensures optimum feed. Increases your efficiency: Screwdriver handle size concept for optimal balance between precision and control. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your efficiency: Careful workmanship and controlled power transmission thanks to the slim handle with soft grip.

Slotted, Phillips, 6 pcs. with holder

| 2270P | |
|-------|--|
| | |

| Order-No. | |
|-----------|---|
| 42989 | 1 |
| \ominus | 1,5 x 50 / 2,0 x 50 / 2,5 x 65 / 3 x 65 |
| \oplus | PH00 x 50 / PH0 x 65 |

| Slotted | | | | 2270P | | |
|-----------|-----------|-----------|-----|-------|-------------|----|
| Order-No. | \ominus | ■ | •1 | mm | | |
| 42374 | 1,5 | 50 | 2,0 | 152 | 18 | 10 |
| 42375 | 2,0 | 50 | 2,0 | 152 | 18 | 10 |
| 42376 | 2,5 | 65 | 2,5 | 167 | 18 | 10 |
| 42377 | 3 | 65 | 3 | 167 | 18 | 10 |
| 42471 | 3,5 | 65 | 3,5 | 167 | 18 | 10 |
| | | | | | | |

Phillips

→ Slotted


| 2271P | |
|-------|--|
| | |

| _ | | | | | | 22111 |
|-----------|--------------|---------|----|-----|-------------|-------|
| Order-No. | ① | | •1 | mm | | |
| 42379 | PH00 | 50 | 2 | 152 | 18 | 10 |
| 42378 | PH0 | 65 | 3 | 167 | 18 | 10 |
| 42380 | PH1 | 65 | 4 | 167 | 18 | 10 |

INFOBOX: PicoFinish electric

Wiha PicoFinish electric: The VDE-GS tested precision screwdriver.

- The smooth-running turn-cap enables fast turning.
- Imprint with the screw symbol and sizes eases recognition.

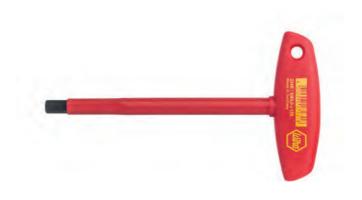







Simplifies your work: More power when fastening thanks to the leverage from the T-handle design Increases your efficiency: Handle size concept for an optimum balance between torque and control Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Simplifies your work: More power when fastening thanks to the leverage from the T-handle design Increases your efficiency: Handle size concept for an optimum balance between torque and control Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| Hex | | | | | | |
|-----------|------------|----------|----------------------|--------------|-----|----------|
| Order-No. | lacksquare | ₩ | \rightleftharpoons | — (1) | →), | = |
| 27928 | 4 | 150 | 176 | 80 | 26 | 10 |
| 27929 | 5 | 150 | 182 | 100 | 32 | 10 |
| 27930 | 6 | 150 | 182 | 100 | 32 | 10 |
| 27931 | 8 | 150 | 182 | 100 | 32 | 10 |

Manufactured acc. to IEC 60900.

| Онех | | | | | | 336N |
|--------------|----|------------|-----|---|-----|---|
| Order-No. | - | ≕ I | | • | →). | |
| 27932 | 8 | 200 | 232 | 100 | 32 | 10 |
| 27933 | 10 | 230 | 262 | 100 | 32 | 10 |
| 27934 | 13 | 230 | 262 | 100 | 32 | 10 |
| 27935 | 17 | 230 | 268 | 120 | 38 | 10 |
| Manufactured | | | | *************************************** | | *************************************** |

0

Adjustable spanner electric





Improved access: Through the 15° position of jaws, light work is made of fastening even in restricted spaces. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Protects your material: Fully insulated tool reduces the risk of short circuits.





Meets your requirements: Continuously adjustable spanner width for a large application field. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

○Adjustable between 0-30 mm

5590NA

| Order-No. | 0 | ₩mm | |
|----------------|--------|-----|---|
| 43061 | 0 - 30 | 250 | 1 |
| Manufactured a | | | |

Insulated nut driver insert





Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Protects your material:** Fully insulated tool reduces the risk of short circuits.

○1/2" hexagon head

7208NS

| Order-No. | 0 | ₩₩ | |
|-----------|----|----|---|
| 43077 | 10 | 55 | 1 |
| 43078 | 11 | 55 | 1 |
| 43079 | 12 | 55 | 1 |
| 43080 | 13 | 55 | 1 |
| 43081 | 14 | 55 | 1 |
| 43082 | 17 | 55 | 1 |
| 43083 | 19 | 55 | 1 |
| 43084 | 22 | 55 | 1 |
| 43085 | 24 | 55 | 1 |
| 43086 | 27 | 55 | 1 |
| 43087 | 32 | 55 | 1 |
| | | | |

Manufactured according to EN/IEC 60900.

| 0 | | | 55901 |
|----------------|-----------|------------------|-------|
| Order-No. | 0 | ↑ mm | |
| 43026 | 6 | 90 | 1 |
| 43027 | 7 | 90 | 1 |
| 43028 | 8 | 100 | 1 |
| 43029 | 9 | 100 | 1 |
| 43030 | 10 | 110 | 1 |
| 43031 | 11 | 110 | 1 |
| 43032 | 12 | 130 | 1 |
| 43033 | 13 | 135 | 1 |
| 43034 | 14 | 145 | 1 |
| 43035 | 15 | 150 | 1 |
| 43036 | 16 | 160 | 1 |
| 43037 | 17 | 160 | 1 |
| 43038 | 18 | 175 | 1 |
| 43039 | 19 | 175 | 1 |
| 43040 | 22 | 195 | 1 |
| 43041 | 24 | 225 | 1 |
| 43042 | 27 | 250 | 1 |
| 43043 | 30 | 290 | 1 |
| 43044 | 32 | 310 | 1 |
| Manufactured a | according | to EN/IEC 60900. | |

Insulated nut driver insert











Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Protects your material: Fully insulated tool reduces the risk of short circuits.

Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Protects your material: Fully insulated tool reduces the risk of short circuits.

| ○3/8" hexagon head 7207 | | | | | | |
|-------------------------|----|----|----------|--|--|--|
| Order-No. | 0 | ₩₩ | = | | | |
| 43065 | 8 | 45 | 1 | | | |
| 43066 | 10 | 45 | 1 | | | |
| 43067 | 11 | 45 | 1 | | | |
| 43068 | 12 | 45 | 1 | | | |
| 43069 | 13 | 45 | 1 | | | |
| 43070 | 14 | 45 | 1 | | | |
| 43071 | 16 | 45 | 1 | | | |
| 43072 | 17 | 45 | 1 | | | |
| 43073 | 18 | 45 | 1 | | | |
| 43074 | 19 | 47 | 1 | | | |
| 43075 | 21 | 47 | 1 | | | |
| 43076 | 22 | 47 | 1 | | | |

| ○1/4" he | ◯1/4" hexagon head | | | | |
|-----------|--------------------|----|----------|--|--|
| Order-No. | 0 | ₩m | = | | |
| 43088 | 4 | 42 | 1 | | |
| 43089 | 5 | 42 | 1 | | |
| 43090 | 5,5 | 42 | 1 | | |
| 43091 | 6 | 42 | 1 | | |
| 43092 | 7 | 42 | 1 | | |
| 43093 | 8 | 42 | 1 | | |
| 43094 | 9 | 42 | 1 | | |
| 43095 | 10 | 42 | 1 | | |
| 43096 | 11 | 42 | 1 | | |
| 43097 | 12 | 42 | 1 | | |
| 43098 | 13 | 42 | 1 | | |
| 43099 | 14 | 42 | 1 | | |
| | | | 2.00000 | | |

Manufactured according to EN/IEC 60900.

Insulated nut driver insert









Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| ● 1/2" internal hexagon 7208NH | | | | | | |
|---------------------------------------|--------------|-----|-------|--|--|--|
| Order-No. | lacktriangle | ₩₩ | | | | |
| 43100 | 4 | 120 | 1 | | | |
| 43101 | 5 | 120 | 1 | | | |
| 43102 | 6 | 120 | 1 | | | |
| 43103 | 8 | 120 | 1 | | | |
| 43104 | 10 | 120 | 1 | | | |
| Manufactured a | according | | 0900. | | | |

| 3/8" internal hexagon 7207NHS | | | | | | |
|-------------------------------|---------|-------------|----------|--|--|--|
| Order-No. | • | ₩₩ | = | | | |
| 43105 | 4 | 75 | 1 | | | |
| 43106 | 5 | 75 | 1 | | | |
| 43107 | 6 | 75 | 1 | | | |
| 43108 | 8 | 75 | 1 | | | |
| Manufactured ac | cording | to EN/IEC 6 | 60900. | | | |



Insulated extension



Improved access: Deep-set screws can be reached easily. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

1/2" square adapter for nut driver inserts, insulated

| | | | /208NEX |
|--------------|------------|-----|---------|
| Order-No. | = ‡ | ₩₩ | |
| 43055 | 1/2" | 125 | 1 |
| 43056 | 1/2" | | 1 |
| Manufactured | | | C 60000 |

○3/8" square adapter for nut driver inserts, insulated

| | | | 7207NEX |
|----------------|---------|-----|---------|
| Order-No. | | ★mm | |
| 43057 | 3/8" | 125 | 1 |
| 43058 | 3/8" | 250 | 1 |
| Manufactured a | | | 00. |

T-handle insulated for nut driver

wiha ⊕

Improved access: Deep-set screws can be reached easily. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| 24618T |
|--------|

| Order-No. | | ★mm | | | |
|---|---------|-----|----|--|--|
| 43063 | 1/2" | 200 | 10 | | |
| 43062 | 3/8" | 200 | 10 | | |
| Manufactured according to EN/IEC 60900. | | | | | |

Ratchet wrench insulated for nut drivers





Protect your health: Reduction of the risk of injury by increasing the hand working space. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Increases your flexibility:** Adjustable right or left rotation through switching lever.

Switchable

| 720 | 17N | IRΝ |
|-----|-----|-----|

| Order-No. | = : | ₩₩ | |
|-----------|------------|-----|---|
| 43052 | 3/8" | 200 | 1 |
| 43053 | 1/2" | 250 | 1 |

Manufactured according to EN/IEC 60900.

Universal key with double joint



Screwdriver SoftFinish®



Makes handling easier: Can be used as a slim pin or as a powerful T-handle thanks to the double joint. **Increases your efficiency:** 8 key profiles combined in a compact and light tool.

with triangular heads, square heads and double bit

| $^{\circ}$ | 10 | 0 | 2 |
|------------|----|----|---|
| ۷, | ŧΟ | O۵ | _ |

Simplifies your work: Striking cap integrated into the handle allows you to strike and lift with the screwdriver. Makes handling easier: Easy loosening of tight screws thanks to hex bolster for spanners.

Protect your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: Screwdriver handle size concept for optimal balance between precision and control.

Switch cabinet key cross shape



Increases your efficiency: All keys and profiles integrated into one compact, lightweight tool.

→ Slotted with one-piece hexagonal blade and solid steel cap

| | | | | | | | | 530 |
|-----------|-----------|---------|-------------|------------|--------------|-----|----------|-----|
| Order-No. | \ominus | | \ominus ; | • 1 | \bigcirc 1 | mm | = | |
| 03223 | 3,5 | 75 | 0,6 | 4,0 | - | 186 | 10 | |
| 03224 | 4,5● | 90 | 0,8 | 4,0 | - | 201 | 10 | |
| 03225 | 5,5 | 100 | 1,0 | 5,0 | 8 | 213 | 10 | |
| 03226 | 6,5 | 125 | 1,2 | 6,0 | 10 | 238 | 10 | |
| 03228 | 8,0 | 150 | 1,2 | 8,0 | 13 | 271 | 5 | |
| 03230 | 10,0 | 175 | 1,6 | 8,0 | 13 | 296 | 5 | |
| 03231 | 12,0 | 200 | 2,0 | 10,0 | 16 | 321 | 5 | |
| 03232 | 14,0• | | 2,5 | | 16 | | 5 | |

Additional dimension. Non-DIN size.

with triangular heads, square heads and double bit

| 24 | 66 |
|----|----|
| 2 | OC |

| Order-No. | 0 | ٥ | 0 | \ominus | ⊕ | |
|-----------|-----|---|-----|-----------|----------|---|
| 36114 | 5-8 | 9 | 3-5 | 7,0 | PH2 | 1 |

Phillips with one-piece hexagonal blade and solid steel cap

| | | | | | | | 55 | 1 |
|-----------|--------------|----------|----------|--------------|-----|-------------------|----------|---|
| Order-No. | 1 | ≕ | 1 | \bigcirc t | mm | — <u>→</u> | = | |
| 03237 | PH1 | 80 | 5,0 | 8 | 186 | 30 | 10 | |
| 03238 | PH2 | 100 | 6,0 | 10 | 213 | 36 | 10 | |
| 03239 | PH3 | 150 | 8,0 | 13 | 268 | 41 | 10 | |

INFOBOX: Solid steel cap and hexagon head



- The solid steel cap at the end of the screwdriver handle enables targeted hammering, e.g. to loosen jammed screws.
- The direct connection of the solid steel cap to the blade means that the impact energy is transmitted without any loss.
- Blade includes a hexagon bolster for using a set of spanners for additional torque.

Pozidriv with one-piece hexagonal blade and solid steel cap

| | | | | | | | 532 |
|-----------|-----|-----|----------|--------------|-----|------------|-----|
| Order-No. | ₩ | ⇌╸ | 1 | \bigcirc ‡ | mm | — → | |
| 03245 | PZ1 | 80 | 5,0 | 8 | 186 | 30 | 10 |
| 03246 | PZ2 | 100 | 6,0 | 10 | 213 | 36 | 10 |
| 03247 | PZ3 | 150 | 8,0 | 13 | 268 | 41 | 10 |



3022







Protect your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Unique Wiha handle-length concept for optimum balance of torque and control.

Protect your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Unique Wiha handle-length concept for optimum balance of torque and control.

Slotted with round blade for low-lying screws

| | | | | | | | | 302 |
|-----------|-----------|----------|-------------|-----|-----|------------|----|-----|
| Order-No. | \ominus | ⇒ | \ominus ; | •1 | mm | - ≠ | | |
| 00684 | 2,0• | 65 | 0,4 | 2,0 | 169 | 23 | 10 | |
| 00685 | 2,5 | 75 | 0,4 | 2,5 | 179 | 23 | 10 | |
| 00686 | 3,0• | 80 | 0,5 | 3,0 | 184 | 23 | 10 | |
| 00687 | 3,0 | 100 | 0,5 | 3,0 | 204 | 23 | 10 | |
| 00689 | 3,0• | 150 | 0,5 | 3,0 | 254 | 23 | 10 | |
| 00690 | 3,0• | 200 | 0,5 | 3,0 | 304 | 23 | 10 | |
| 32383 | 3,0 | 300 | 0,5 | 3,0 | 404 | 23 | 5 | |
| 00691 | 3,5 | 100 | 0,6 | 3,5 | 204 | 23 | 10 | |
| 26931 | 3,5• | 200 | 0,6 | 3,5 | 304 | 23 | 10 | |
| 00692 | 4,0 | 100 | 0,8 | 4,0 | 211 | 30 | 10 | |
| 00694 | 4,0• | 150 | 0,8 | 4,0 | 261 | 30 | 10 | |
| 00695 | 4,0• | 200 | 0,8 | 4,0 | 311 | 30 | 10 | |
| 00696 | 4,0• | 300 | 0,8 | 4,0 | 411 | 30 | 10 | |
| 27753 | 4,5• | 80 | 0,8 | 4,5 | 191 | 30 | 10 | |
| 00697 | 4,5• | 125 | 0,8 | 4,5 | 236 | 30 | 10 | |
| 00698 | 5,5 | 125 | 1,0 | 5,5 | 236 | 30 | 10 | |
| 00700 | 5,5 | 150 | 1,0 | 5,5 | 261 | 30 | 10 | |
| 00701 | 5,5• | 200 | 1,0 | 5,5 | 311 | 30 | 10 | |
| 00702 | 5,5• | 300 | 1,0 | 5,5 | 411 | 30 | 5 | |
| 32384 | 6,0• | 300 | 1,0 | 6,0 | 418 | 36 | 5 | |

Additional dimension. Non-DIN size.

Slotted with round blade

6,0

6,0

6,5

6,5

6,5•

8,0

8,0

0,8

8,0

10,0

10,0

12,0

14,0 • 250

200

300

250

8,0

8,0

8.0

11,0

1,6

1,6

2.0

2,5

324

424

374

374

Order-No. 27754

27755

00704

00703

00706

00708

00707

00709

32399

00711

32400

00712

00713

| ≕ | ∪ i | • | mm | | |
|----------|----------------|-----|-----|-------------|----|
| 100 | 1,0 | 5,5 | 218 | 36 | 10 |
| 150 | 1,0 | 5,5 | 268 | 36 | 10 |
| 100 | 1,2 | 6,0 | 218 | 36 | 10 |
| 150 | 1,2 | 6,0 | 268 | 36 | 10 |
| 200 | 1,2 | 6,0 | 318 | 36 | 10 |
| 150 | 1,2 | 7,0 | 274 | 41 | 10 |
| 175 | 1,2 | 7,0 | 299 | 41 | 10 |
| 175 | 1,6 | 7,0 | 299 | 41 | 5 |
| 300 | 1,2 | 7,0 | 424 | 41 | 5 |
| | | | | | |

41

41

41

41

10

5

10

10

Additional dimension. Non-DIN size.
DIN ISO 2380.

Screwdriver with LiftUp 25 magnetic bit magazine



Simplifies your work: Larger handle – maximum power. Protect your health: No risk of injury, *all bits stowed safely inside the handle. Increases your flexibility: Standard bits are also suitable for machine operation.







assorted with 12 bits, 1/4" in blister pack

SB 380302

| Order-N | | |
|-----------|--|---|
| 38606 | | 5 |
| \ominus | 1 x 5,5 | |
| \oplus | 1 x PH2 | |
| ₩ | 1 x PZ1 / 1 x PZ2 / 1 x PZ3 | |
| | 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 | |
| | 1 x 3,0 / 1 x 4,0 / 1 x 5,0 | |
| | ······································ | |


Screwdriver with bit magazine magnetic



| Phillips slotted with 6 bits, Stubby, 1/4" in blister pack SB | | | SB 3801 |
|---|-----------------------------|---|---------|
| Order-No. | | ੰ | |
| 33738 | | 5 | |
| \ominus | 1 x 4,5 / 1 x 6,5 / 1 x 8,0 | | |
| • | 1 x PH1 / 1 x PH2 / 1 x PH3 | | |

| TORX® with 6 bits, Stubby, 1/4" in blister pack | | SB 3801 |
|---|--|--------------|
| Order-No | | - |
| 33744 | 5 | |
| * | 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T3 | 30 / 1 x T40 |

| Slotted, Pozidriv with 6 bits, Stubby, 1/4" in blister pack | | | |
|---|-----------------------------|--|--|
| Order-No. | | | |
| 33746 | 5 | | |
| Θ | 1 x 4,5 / 1 x 6,5 / 1 x 8,0 | | |
| ₩ | 1 x PZ1 / 1 x PZ2 / 1 x PZ3 | | |

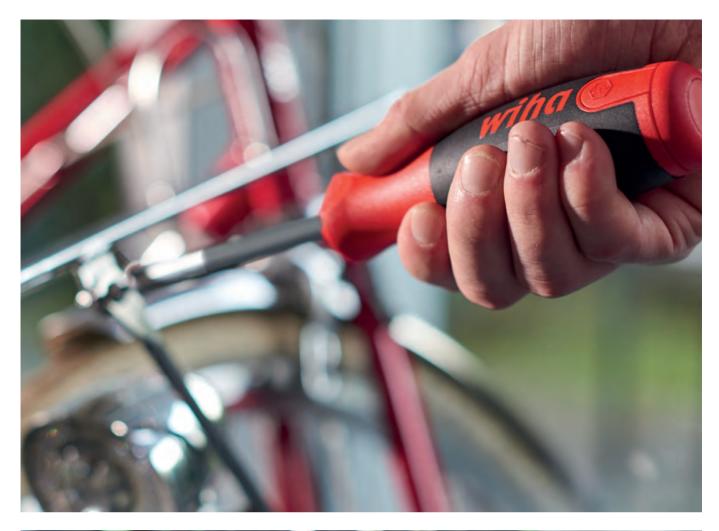



Three.For all your jobs.



Which machine? Which application? Which bit? The revolutionary Wiha bit concept puts an end to any confusion and presents three bit types which can cover all areas of use.

Only the screw shape is crucial for selecting the bit. The Y bit is ideal for fastening Y-shaped screws with an angle no greater than 90° between the thread and screw head. The T bit is used for T-shaped screws at a 90° angle. If you need to fasten both screw types, then the TY bit is the right choice since this universal bit is suitable for all type of fastenings.

• Increases your efficiency

The specialist with 120x greater lifespan* thanks to optimised bits. * Compared to Wiha standard bits

Lowers your costs

Bit quick and easy to find thanks to marking – even in dark environments when a UV light is used.

Saves time

No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan.











Lowers your costs: Bit quick and easy to find thanks to red marking – even in dark environments by using an UV light. Saves time: No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Automatic opening at the push of a button and simple bit change directly in the holder. Increases your efficiency: The all-rounder with 120x greater lifespan* thanks to patented bit technology, suitable for all screws. (*compared to Wiha standard bit)





| Pozidriv 1/4" 7-pcs. | | SB 7946-TY202 |
|----------------------|-----------------------------|---------------|
| Order-No. | | |
| 42099 | | 6 |
| ₩ | 1 x PZ1 / 5 x PZ2 / 1 x PZ3 | |

| Hexagon 1/4" 7-pcs. | | SB 7946-TY303 |
|---------------------|---------------------------------------|---------------|
| Order-No. | | |
| 42114 | | 6 |
| | 2 x SW3 / 2 x SW4 / 2 x SW5 / 1 x SW6 | |

| TORX® 1/ | /4" 7-pcs. | SB 7946-TY505 |
|-----------|---|---------------|
| Order-No. | | |
| 42115 | 6 | |
| • | 1 x T10 / 1 x T15 / 2 x T20 / 1 x T25 / 1 x T30 | 0 / 1 x T40 |

| Phillips, Pozidriv, TORX®, 7-pcs., 1/4" SB 7946-T | | SB 7946-TY903 |
|---|-----------------------------|---------------|
| Order-No. | | = |
| 42116 | | 6 |
| ⊕ | 1 x PH2 | |
| ₩ | 1 x PZ1 / 1 x PZ2 / 1 x PZ3 | |
| ③ | 1 x T15 / 1 x T20 / 1 x T25 | |
| | | |

| Phillips, Pozidriv, TORX®, 7-pcs., 1/4" | | SB 7946-TY904 |
|---|--------------------------------------|---------------|
| Order-No |). | = |
| 42117 | | 6 |
| ⊕ | 1 x PH2 | |
| (1) | 1 x PZ1 / 1 x PZ2 | |
| (*) | 1 x T10 / 1 x T15 / 1 x T20 / 1 x T2 | 5 |

| Pozidriv, TORX® 7-pcs. 1/4" in box | | SB 7946-TY905 |
|------------------------------------|---|---------------|
| Order-N | lo. | |
| 42118 | - | 6 |
| ₩ | 1 x PZ2 / 1 x PZ3 | |
| • | 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / | / 1 x T40 |









Lowers your costs: Bit quick and easy to find thanks to red marking – even in dark environments by using an UV light. **Saves time:** No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Automatic opening at the push of a button and simple bit change directly in the holder. **Increases your efficiency:** The all-rounder with 120x greater lifespan* thanks to patented bit technology, suitable for all screws. (*compared to Wiha standard bit)





| Pozidriv 1/4" 8-pcs. | | SB 7945-TY20 | 2 |
|--------------------------|--|--------------|---|
| Order-N | 0. | | |
| 42098 | | 6 | |
| \$\frac{1}{2} | 1 x PZ1 / 5 x PZ2 / 1 x PZ3 | | |
| 0 | 1 x Bit holder magnetic extra strong mag | | |
| | | | |

| Hexagon 8-pcs. 1/4" | | SB 7945-TY303 |
|---------------------|--|---------------|
| Order-No. | (| = |
| 42135 | | 6 |
| | 2 x SW3 / 2 x SW4 / 2 x SW5 / 1 x SW6 | |
| 0 | 1 x Bit holder magnetic extra strong magnet, 1/- | 4" |
| | | |

| TORX® 1/ | '4" 8-pcs. SB 7945-TY505 |
|------------|---|
| Order-No. | = |
| 42136 | 6 |
| (*) | 1 x T10 / 1 x T15 / 2 x T20 / 1 x T25 / 1 x T30 / 1 x T40 |
| 0 | 1 x Bit holder magnetic extra strong magnet, 1/4" |

| Phillips, Pozidriv, TORX®, 8-pcs., 1/4" SB 7945-TY96 | | SB 7945-TY903 |
|--|---|---------------|
| Order-No. | |) |
| 42137 | 6 | 3 |
| ⊕ | 1 x PH2 | |
| ₩ | 1 x PZ1 / 1 x PZ2 / 1 x PZ3 | |
| * | 1 x T15 / 1 x T20 / 1 x T25 | |
| 0 | 1 x Bit holder magnetic extra strong magnet, 1/4" | |

| Phillips, | Phillips, Pozidriv, TORX®, 8-pcs., 1/4" SB 7945-TY90 | |
|------------|---|---|
| Order-No. | | |
| 42138 | | 6 |
| ⊕ | 1 x PH2 | |
| ₩ | 1 x PZ1 / 1 x PZ2 | |
| (*) | 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 | |
| 0 | 1 x Bit holder magnetic extra strong magnet, | |

| Pozidriv, TORX® 1/4" 8-pcs. SB 794 | | SB 7945-TY905 |
|------------------------------------|--|---------------|
| Order-N | No. | |
| 42139 | | 6 |
| ₩ | 1 x PZ2 / 1 x PZ3 | |
| | 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x | (T40 |
| 0 | 1 x Bit holder magnetic extra strong magnet, 1 | /4" |

FlipSelector T bit set, 25 mm









Lowers your costs: Bit quick and easy to find thanks to blue marking – even in dark environments by using an UV light. Saves time: No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Increases your efficiency: The specialist with 120x greater lifespan* thanks to optimised bit for T-shaped screws(*compared to Wiha standard bit)









Lowers your costs: Bit quick and easy to find thanks to blue marking – even in dark environments by using an UV light. Saves time: No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Simple and rapid bit removal thanks to clear organisation and automatic opening at the push of a button. Increases your efficiency: The specialist with 120x greater lifespan* thanks to optimised bit for T-shaped screws(*compared to Wiha standard bit)

Phillips, TORX®, hex 13-pcs. 1/4"

| 7948- | |
|-------|--|
| | |

| Order-No. | |
|-----------|---|
| 41831 | 6 |
| ⊕ | 1 x PH1 / 1 x PH2 / 1 x PH3 |
| • | 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40 |
| | 1 x SW3 / 1 x SW4 / 1 x SW5 / 1 x SW6 |
| 0 | 1 x Bit holder magnetic extra strong magnet, 1/4" |

XLSelector T bit set, 25 mm









Lowers your costs: Bit quick and easy to find thanks to blue marking – even in dark environments by using an UV light. Saves time: No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Increases your efficiency: The specialist with 120x greater lifespan* thanks to optimised bit for T-shaped screws(*compared to Wiha standard bit)

Phillips, TORX®, hex 31-pcs. 1/4"

| SB | 7948-T999 |
|----|-----------|

| Order-No. | ± |
|-----------|---|
| 41830 | 6 |
| ⊕ | 2 x PH1 / 4 x PH2 / 2 x PH3 |
| ③ | 2 x T10 / 2 x T15 / 4 x T20 / 2 x T25 / 2 x T30 / 2 x T40 |
| | 2 x SW3 / 2 x SW4 / 2 x SW5 / 2 x SW6 |
| 0 | 1 x Bit holder magnetic extra strong magnet, 1/4" |

Hexagon 16-pcs. 1/4"

SB 7947-T303

| Order-No. | \(\begin{array}{c}\end{array}\) |
|-----------|---|
| 41825 | 6 |
| | 3 x SW3 / 3 x SW4 / 3 x SW5 / 3 x SW6 |
| 0 | 1 x Bit holder magnetic extra strong magnet, 1/4" |

Phillips, Pozidriv, TORX®, 13-pcs., 1/4"

SB 7947-T906

| | 0570477000 |
|------------|---|
| Order-No. | (±) |
| 41824 | 6 |
| ⊕ | 1 x PH1 / 3 x PH2 / 1 x PH3 |
| ₩ | 1 x PZ2 |
| (*) | 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40 |
| 0 | 1 x Bit holder magnetic extra strong magnet, 1/4" |

assorted 1/4" 13-pcs.

SB 7947-T999

| Order-No. | |
|--------------|---|
| 41826 | 6 |
| ① | 1 x PH1 / 1 x PH2 / 1 x PH3 |
| ₩ | 1 x PZ2 |
| (*) | 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40 |
| | 1 x SW4 / 1 x SW5 / 1 x SW6 |
| 0 | 1 x Bit holder magnetic extra strong magnet, 1/4" |
| | |

XLSelector Y bit set, 50 mm







Ş<mark>.</mark> uv

Lowers your costs: Bit quick and easy to find thanks to yellow marking – even in dark environments by using an UV light. Saves time: No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Increases your efficiency: The specialist with 120x greater lifespan* thanks to optimised bit for Y-shaped screws(*compared to Wiha standard bit)

Phillips, Pozidriv, TORX®, 13-pcs., 1/4"

| Order-No. | |
|------------|---|
| 41834 | 6 |
| ⊕ | 2 x PH2 |
| ₩ | 1 x PZ1 / 2 x PZ2 / 1 x PZ3 |
| (*) | 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40 |
| 0 | 1 x Bit holder magnetic extra strong magnet, 1/4" |

XLSelector Y bit set, 25 mm









Lowers your costs: Bit quick and easy to find thanks to yellow marking – even in dark environments by using an UV light. Saves time: No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Increases your efficiency: The specialist with 120x greater lifespan* thanks to optimised bit for Y-shaped screws(*compared to Wiha standard bit)

TORX® 31-pcs. 1/4"

| Order-No. | |
|------------|---|
| 41833 | 6 |
| (*) | 3 x T10 / 6 x T15 / 6 x T20 / 6 x T25 / 6 x T30 / 3 x T40 |
| 0 | 1 x Bit holder magnetic extra strong magnet, 1/4" |

Phillips, Pozidriv, TORX®, 31-pcs., 1/4"

| (| Order-No. | | |
|---|---------------|---|---------|
| | 41832 | 6 | |
| (| 1 | 1 x PH1 / 4 x PH2 / 1 x PH3 | |
| (| \$ | 2 x PZ1 / 4 x PZ2 / 2 x PZ3 | |
| (| (*) | 2 x T10 / 3 x T15 / 3 x T20 / 3 x T25 / 3 x T30 / | 2 x T40 |
| | \cap | 1 x Rit holder magnetic extra strong magnet 1/4" | |

FlipSelector Y bit set, 25 mm









SB 7948-Y904

Lowers your costs: Bit quick and easy to find thanks to yellow marking – even in dark environments by using an UV light. Saves time: No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Simple and rapid bit removal thanks to clear organisation and automatic opening at the push of a button. Increases your efficiency: The specialist with 120x greater lifespan* thanks to optimised bit for Y-shaped screws(*compared to Wiha standard bit)

Pozidriv 1/4" 13-pcs.

SB 7947-Y202

| Order-No. | |
|-----------|---|
| 41829 | 6 |
| ₩ | 2 x PZ1 / 8 x PZ2 / 2 x PZ3 |
| 0 | 1 x Bit holder magnetic extra strong magnet, 1/4" |

TORX® 1/4" 13-pcs.

SB 7947-Y505

| Order-No. | |
|------------|---|
| 41828 | 6 |
| (*) | 2 x T10 / 2 x T15 / 3 x T20 / 2 x T25 / 2 x T30 / 1 x T40 |
| 0 | 1 x Bit holder magnetic extra strong magnet, 1/4" |

Phillips, Pozidriv, TORX $^{\circ}$, 13-pcs., 1/4 $^{\circ}$

SB 7947-Y904

| Order-No. | |
|-----------|---|
| 41827 | 6 |
| ⊕ | 2 x PH2 |
| ₩ | 1 x PZ1 / 2 x PZ2 / 1 x PZ3 |
| • | 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40 |
| 0 | 1 x Bit holder magnetic extra strong magnet, 1/4" |

Bit set FlipSelector Standard 25 mm



Meets your requirements: Robust and precise bits for general fastening in trade and industry. **Saves time:** Simple and quick recognition of profile sizes thanks to contrasting laser marking. **Increases your efficiency:** All standard 25 mm bits organised in a compact, space-saving design.

assorted 1/4" 31-pcs.

7948-005

| Order-No. | = |
|------------|---|
| 29417 | 5 |
| Θ | 1 x 4,5 / 1 x 5,5 / 1 x 6,5 |
| \oplus | 2 x PH1 / 4 x PH2 / 1 x PH3 |
| ₩ | 2 x PZ1 / 5 x PZ2 / 1 x PZ3 |
| (*) | 2 x T10 / 2 x T15 / 2 x T20 / 3 x T25 / 2 x T30 / 1 x T40 |
| 0 | 1 x Bit holder magnetic, 58 mm 1/4" |

| assorted | 1/4" 31-pcs. 7948-927 |
|--------------|---|
| Order-No. | |
| 29416 | 5 |
| & | 1x0/1x1/1x2/1x3/1x4 |
| • | 1 x 4 / 1 x 6 / 1 x 8 / 1 x 10 |
| • | 1 x TR2,0 / 1 x TR2,5 / 1 x TR3,0 / 1 x TR4,0 / 1 x TR5,0 / 1 x TR6,0 |
| & | 1 x 6 / 1 x 8 / 1 x 10 |
| * | 1 x T8H / 1 x T9H / 1 x T10H / 1 x T15H / 1 x T20H / 1 x T25H / 1 x T27H / 1 x T30H / 1 x T40H |
| | 1 x #1 / 1 x #2 / 1 x #3 |
| 0 | 1 x CentroFix quick release holder, magnetic, style E 6.3. |



Mixed, 1/4", 13-pcs. with belt clip in blister pack

SB 7947-999

| Order-No | |
|------------|---------------------------------------|
| 39083 | 5 |
| \ominus | 1 x 5,5 |
| ⊕ | 1 x PH2 |
| ₩ | 1 x PZ1 / 1 x PZ2 / 1 x PZ3 |
| (*) | 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 |
| | 1 x 3,0 / 1 x 4,0 / 1 x 5,0 |
| 0 | 1 x Bit holder magnetic, 58 mm 1/4" |

Slotted, Phillips, Pozidriv, 13-pcs., 1/4" with belt clip, in blister pack

SB 7947-005

| Order-No. | |
|-----------|-------------------------------------|
| 39049 | 5 |
| \ominus | 1 x 5,5 |
| ⊕ | 1 x PH1 / 3 x PH2 / 1 x PH3 |
| ₩ | 1 x PZ1 / 4 x PZ2 / 1 x PZ3 |
| 0 | 1 x Bit holder magnetic, 58 mm 1/4" |

Phillips, Pozidriv, TORX $^{\circ}$, 13-pcs., 1/4" with belt clip, in blister pack

SB 7947-904

| Order-No | |
|------------|---|
| 39060 | 5 |
| ⊕ | 2 x PH2 |
| ₩ | 1 x PZ1 / 2 x PZ2 / 1 x PZ3 |
| (*) | 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40 |
| 0 | 1 x Bit holder magnetic, 58 mm 1/4" |

Pozidriv, TORX® 1/4" 13-pcs.

7947-905

| Order-No. | = |
|------------|---|
| 39041 | 10 |
| ₩ | 1 x PZ1 / 2 x PZ2 / 1 x PZ3 |
| (*) | 1 x T10 / 1 x T15 / 2 x T20 / 2 x T25 / 1 x T30 / 1 x T40 |
| 0 | 1 x Bit holder magnetic, 58 mm 1/4" |



TORX®, 13-pcs., 1/4" with belt clip, in blister pack

| | | | | | | | 5 | E | 3 | | / | • | | 2 | ١. | 4 | 1 | ı | | | | , | (|) |
|--|--|--|--|--|--|--|---|---|---|--|---|---|---|---|----|---|---|---|--|--|--|---|---|---|
| | | | | | | | | | | | | | • | | | | | | | | | | | |

| Order-No | |
|----------|---|
| 39056 | 5 |
| • | 1 x T7 / 1 x T8 / 1 x T9 / 1 x T10 / 2 x T15 / 2 x T20 / 2 x T25 / 1 x T30 / 1 x T40 |
| 0 | 1 x Bit holder magnetic, 58 mm 1/4" |

TORX® Tamper Resistant (with drill hole), 13-pcs., 1/4" with belt clip, in blister pack

SB 7947-505TR

| | SB /94/-0001R |
|-----------|--|
| Order-No. | |
| 39057 | 5 |
| * | 1 x T7H / 1 x T8H / 1 x T9H / 1 x T10H / 2 x T15H / 2 x T20H / 2 x T25H / 1 x T30H / 1 x T40H |
| 0 | 1 x Bit holder magnetic, 58 mm 1/4" |

Hex, 11-pcs., 1/4" with belt clip in blister pack

SB 7947-902

| Order-No. | (±) |
|-----------|---|
| 39059 | 5 |
| | 1 x 1,5 / 1 x 2,0 / 1 x 2,5 / 2 x 3,0 / 2 x 4,0 / 1 x 5,0 / 1 x 6,0 / 1 x 8,0 |

O 1 x Bit holder magnetic, 58 mm 1/4"

| SIT | (for | Assy® | and | Pias | screws), | 13-pcs., | 1/4" |
|-----|------|-------|-----|------|----------|----------|------|
|-----|------|-------|-----|------|----------|----------|------|

7947-995

| Order-No. | = |
|-----------|--|
| 39045 | 10 |
| | 2 x SIT 10 / 4 x SIT 20 / 3 x SIT 25 / 2 x SIT 30 / 1 x SIT 40 |
| 0 | 1 x Bit holder magnetic, 58 mm 1/4" |

High-performance offset screwdriver with quick release holder 1/4"



Increases your safety: Variably settable stabiliser arm. Increases your efficiency: Unlimited access to hard-to-reach screws thanks to the 105°-angled tool head.

○ 1/4" in blister pack

24628

| Order-No. | 0 | • | ∰ | max. Nm | |
|-----------|-----|-----|----------|------------|---|
| 32310 | 1/4 | 1/4 | 165 | 57 | 1 |

Bit holder CentroFix mechanically lockable



Simplifies your work: Ideal for all applications due to the non-magnetic locking mechanism . **Increases your efficiency:** Extremely secure and tight zero-play hold of bits.

O1/4"

7148C

| Order-No. | 0 | lacksquare | mm | |
|-----------|-----|------------|----|----|
| 32477 | 1/4 | 1/4 | 60 | 10 |

Bit holder CentroFix Super Slim mechanically lockable



Saves time: Automatic bit locking mechanism upon insertion. **Increases your efficiency:** Unlimited access to deep-set screws thanks to extreme slimline design.



∩1/4", magnetic

7148 CS

| Order-No. | 0 | lacksquare | mm | |
|-----------|-----|------------|----|---|
| 39134 | 1/4 | 1/4 | 66 | 1 |

Bit holder magnetic, clamping with retaining ring



Simplifies your work: Unrestricted access to low-lying screws thanks to bit holder lengths of up to 250mm. **Increases your efficiency:** Unlimited access to deep-set screws thanks to extreme slimline design.

01/4"

7143

| Order-No. | 0 | lacksquare | mm | (|
|-----------|-----|------------|-----|----------|
| 01913 | 1/4 | 1/4 | 72 | 10 |
| 36092 | 1/4 | 1/4 | 100 | 5 |
| 34306 | 1/4 | 1/4 | 150 | 5 |
| 36093 | 1/4 | 1/4 | 200 | 5 |
| 36094 | 1/4 | 1/4 | 250 | 5 |



Meets your requirements: Robust and precise bits for general fastening in trade and industry. **Saves time:** Simple and quick recognition of profile sizes thanks to contrasting laser marking. **Increases your efficiency:** Best rotation characteristics for stable fastening processes.

| ⊖ Slotted | 1/4" | | | 7040 Z |
|-------------------|-----------|--------------------|-------|--------|
| Order-No. | \ominus | ı ←→ ı | ⇔ | |
| 33961 | 2,5 | 70 | 0,4 | 5 |
| 01790 | 3,0 | 50 | 0,5 | 5 |
| 33962 | 3,0 | 70 | 0,5 | 5 |
| 01792 | 3,5 | 50 | 0,6 | 5 |
| 33963 | 3,5 | 70 | 0,6 | 5 |
| 01791 | 4,0 | 50 | 0,5 | 5 |
| 01794 | 4,0 | 50 | 0,8 | 5 |
| 33964 | 4,0 | 70 | 0,8 | 5 |
| 01793 | 4,5 | 50 | 0,6 | 5 |
| 01795 | 5,5 | 50 | 0,8 | 5 |
| 01796 | 5,5 | 50 | 1,0 | 5 |
| 33965 | 5,5 | 70 | 1,0 | 5 |
| 01798 | 6,5 | 50 | 1,2 | 5 |
| 33966 | 6,5 | 70 | 1,2 | 5 |
| 01799 | 8,0 | 50 | 1,2 | 5 |
| 01800 | 8,0 | 50 | 1,6 | 5 |
| ₩ Pozidriv | v 1/4" | | | |
| | | + | | 7042 Z |
| Order-No. | | l ← → I | | |
| 31957 | PZ0 | 50 | | 5 |
| 31958 | PZ0 | 70 | | 5 |
| 31959 | PZ0 | 90 | | 5 |
| 33706 | PZ1 | 50 | | 5 |
| 01808 | PZ1 | 70 | | 5 |
| 01809 | PZ1 | 90 | ••••• | 5 |
| 23221 | PZ1 | 110 | | 5 |
| 23225 | PZ1 | 127 | | 5 |
| 23227 | PZ1 | 150 | | 5 |
| 33707 | PZ2 | 50 | | 5 |
| 01811 | PZ2 | 70 | | 5 |
| 01812 | PZ2 | 90 | | 5 |
| 05799 | PZ2 | 110 | | 5 |
| 06889 | PZ2 | 127 | | 5 |
| 23228 | PZ2 | 150 | | 5 |
| 33708 | PZ3 | 50 | | 5 |
| 04059 | PZ3 | 70 | | 5 |
| 04176 | PZ3 | 90 | | 5 |
| 23223 | PZ3 | 110 | | 5 |
| 23226 | PZ3 | 127 | | 5 |

| ⊕ Phillips | 1/4" | | 7041 Z |
|-------------------|----------|-----|----------|
| Order-No. | ⊕ | mm⊓ | (|
| 31960 | PH00 | 50 | 5 |
| 31961 | PH00 | 70 | 5 |
| 31962 | PH00 | 90 | 5 |
| 32105 | PH0 | 50 | 5 |
| 35456 | PH0 | 70 | 5 |
| 35457 | PH0 | 90 | 5 |
| 33703 | PH1 | 50 | 5 |
| 01803 | PH1 | 70 | 5 |
| 04126 | PH1 | 90 | 5 |
| 23213 | PH1 | 110 | 5 |
| 23219 | PH1 | 127 | 5 |
| 22509 | PH1 | 150 | 5 |
| 33704 | PH2 | 50 | 5 |
| 01805 | PH2 | 70 | 5 |
| 04009 | PH2 | 90 | 5 |
| 05800 | PH2 | 110 | 5 |
| 06888 | PH2 | 127 | 5 |
| 22510 | PH2 | 150 | 5 |
| 33705 | PH3 | 50 | 5 |
| 04010 | PH3 | 70 | 5 |
| 04127 | PH3 | 90 | 5 |
| 23215 | PH3 | 110 | 5 |
| 23217 | PH3 | 127 | 5 |
| 22511 | PH3 | 150 | 5 |
| | | | |

| ⊕ PlusMin | us/Phillips | 1/4" | 7049PHM |
|-----------|-------------|------|---------|
| Order-No. | \oplus | mm⊓ | |
| 32490 | SL/PH1 | 50 | 5 |
| 32491 | SL/PH1 | 70 | 5 |
| 32686 | SL/PH1 | 90 | 5 |
| 32492 | SL/PH2 | 50 | 5 |
| 32493 | SL/PH2 | 70 | 5 |
| 32687 | SL/PH2 | 90 | 5 |
| | | | |

PZ3 150

22512

| ⊕ PlusMin | us/Po | zidriv | 1/4" | | 7049PZM | Order-No. | | l < → I mm | <u></u> |
|------------------|---------|--------------------------|--------|----------|---|-----------|------------|-----------------------------|---|
| Order-No. | (1 | | mm' | | ······································ | 33719 | T8 | 90 | 5 |
| 32494 | SL/F | PZ1 | 50 | 5 | ······································ | 36327 | T8 | 150 | 5 |
| 32495 | SL/F | PZ1 | 70 | 5 | ······································ | 32305 | Т9 | 50 | 5 |
| 32688 | SL/F | PZ1 | 90 | 5 | | 33712 | Т9 | 70 | 5 |
| 32496 | SL/F | PZ2 | 50 | 5 | | 33720 | Т9 | 90 | 5 |
| 32497 | SL/F | PZ2 | 70 | 5 | | 38372 | Т9 | 150 | 5 |
| 32689 | SL/F | PZ2 | 90 | 5 | | 32306 | T10 | 50 | 5 |
| ☀ TORX® | ball en | d 1/4" | | | 7045BE | 33713 | T10 T10 | 70 | 5 |
| Order-No. | | l ← → I mm | | = | 7040BE | 33721 | T10 | 90 | 5 |
| 32409 | T9 | 50 | | 5 | ······································ | 33726 | T10 | 150 | 5 |
| 32410 | T10 | 50 | | 5 | | 32307 | T15 | 50 | 5 |
| 32416 | T10 | 70 | | 5 | ······································ | 33714 | T15 | 70 | 5 |
| 32417 | T15 | 50 | | 5 | ······································ | 33722 | T15 | 90 | 5 |
| 32418 | T15 | 70 | | 5 | ······································ | 33727 | T15 | 110 | 5 |
| 32411 | T20 | 50 | | 5 | ······································ | 33728 | T15 | 150 | 5 |
| 32419 | T20 | 70 | | 5 | ······································ | 32308 | T20 | 50 | 5 |
| 32412 | T25 | 50 | | 5 | ······································ | 33715 | T20 | 70 | 5 |
| 32421 | T25 | 70 | | 5 | | 33723 | T20 | 90 | 5 |
| 32413 | T27 | 50 | | 5 | ······································ | | T20 | | *************************************** |
| 32414 | T30 | 50 | | 5 | ······································ | 33729 | T20 | 110 150 | 5 |
| 32423 | T30 | 70 | | 5 | | 32309 | T25 | 50 | 5 |
| 32415 | T40 | 50 | | 5 | | 33716 | T25 | 70 | 5 |
| 02110 | - 110 | | | | ······································ | 33724 | T25 | 90 | 5 |
| TORX® | Magic | Spring | ® 1/4" | | 7045R | 33731 | T25 | 110 | 5 |
| Order-No. | | l ← → I mm | | = | | 33732 | T25 | 150 | 5 |
| 34452 | T10 | 50 | | 5 | ······································ | 33920 | T27 | 50 | 5 |
| 34453 | T15 | 50 | | 5 | | 33921 | T27 | 70 | 5 |
| 34454 | T20 | 50 | | 5 | | 33922 | T27 | 90 | 5 |
| 34455 | T25 | 50 | | 5 | | 33923 | T30 | 50 | 5 |
| 34456 | T30 | 50 | | 5 | | 33924 | T30 | 70 | 5 |
| 34457 | T40 | 50 | | 5 | | 33925 | T30 | 90 | 5 |
| | | | | | | 33926 | T30 | 110 | 5 |
| | | | | | | 33927 | T30 | 150 | 5 |
| TORX® | 1/4" | | | | 7045 Z | 33928 | T40 | 50 | 5 |
| Order-No. | | l ∢ → I mm | | | | 33929 | T40 | 70 | 5 |
| 39184 | T1 | 50 | | 5 | | 33930 | T40 | 90 | 5 |
| 39185 | T2 | 50 | | 5 | | 33931 | T40 | 110 | 5 |
| 39186 | T3 | 50 | | 5 | | 33932 | T40 | 150 | 5 |
| 39187 | T4 | 50 | | 5 | | | | | |
| 32299 | T5 | 50 | | 5 | ••••••••••••••••••••••••••••••••••••••• | TORX P | LUS® 1 | 1/4" | 7046 Z |
| 32302 | T6 | 50 | | 5 | ••••••••••••••••••••••••••••••••••••••• | Order-No. | • | l √ → I mm | = |
| 33709 | T6 | 70 | | 5 | ••••••••••••••••••••••••••••••••••••••• | 39195 | 1IP | 50 | 5 |
| 33717 | T6 | 90 | | 5 | ••••••••••••••••••••••••••••••••••••••• | 39196 | 2IP | 50 | 5 |
| 38370 | T6 | 150 | | 5 | ······································ | 32486 | 3IP | 50 | 5 |
| 32303 | T7 | 50 | | 5 | | 39197 | 4IP | 50 | 5 |
| 33710 | T7 | 70 | | 5 | ······································ | 39198 | 4IP | 90 | 5 |
| 33718 | T7 | 90 | | 5 | | 28481 | 5IP | 50 | 5 |
| 38371 | T7 | 150 | | 5 | | 39199 | 5IP | 90 | 5 |
| 32304 | T8 | 50 | | 5 | ······································ | 31973 | 6IP | 90 | 5 |
| 33711 | T8 | 70 | | 5 | ······································ | 26000 | 6IP | 50 | 5 |
| | | | | - | ······ | | | | |

| Order-No. | • | mm |
|-----------|------|----|
| 26002 | 7IP | 50 |
| 23195 | 8IP | 50 |
| 31975 | 8IP | 90 |
| 23197 | 9IP | 50 |
| 23199 | 10IP | 50 |
| 31977 | 10IP | 90 |
| 23201 | 15IP | 50 |
| 25553 | 15IP | 90 |
| 23203 | 20IP | 50 |
| 39200 | 20IP | 90 |
| 23205 | 25IP | 50 |
| 39201 | 25IP | 90 |
| 23207 | 27IP | 50 |
| 39202 | 27IP | 90 |
| 23209 | 30IP | 50 |
| 39203 | 30IP | 90 |
| 23211 | 40IP | 50 |
| 39204 | 40IP | 90 |

| TORX® | Tamper | Resistant | (with | hole) | 1/4" |
|-------|--------|-----------|-------|-------|------|
|-------|--------|-----------|-------|-------|------|

39193

20224

39194

| Order-No. | * | mm |
|-----------|------|----|
| 21045 | T7H | 50 |
| 21047 | Т8Н | 50 |
| 20218 | Т9Н | 50 |
| 20219 | T10H | 50 |
| 39188 | T10H | 90 |
| 24867 | T15H | 50 |
| 39189 | T15H | 90 |
| 20220 | T20H | 50 |
| 39190 | T20H | 90 |
| 20221 | T25H | 50 |
| 39191 | T25H | 90 |
| 20222 | T27H | 50 |
| 39192 | T27H | 90 |
| 20223 | T30H | 50 |
| | | |

⊕ Hexagonal ball end 1/4"

T40H

T30H 90

T40H 90

| Hexago | / 4" 7047R Z | | |
|-----------|---------------------|----|-------------|
| Order-No. | • | mm | (iii |
| 25739 | 3,0 | 50 | 5 |
| 25740 | 4,0 | 50 | 5 |
| 25741 | 5,0 | 50 | 5 |
| 25742 | 6,0 | 50 | 5 |

MagicRing® hex 1/4"

| Order-No. | • | mm |
|-----------|-----|----|
| 23145 | 3,0 | 50 |
| 23147 | 4,0 | 50 |
| 23149 | 5,0 | 50 |
| 23151 | 6,0 | 50 |

Hexagon 1/4"

7043 Z

7043R Z

| Order-No. | • | mm | (|
|-----------|-----|----|----------|
| 05301 | 1,5 | 50 | 5 |
| 05302 | 2,0 | 50 | 5 |
| 34554 | 2,0 | 70 | 5 |
| 39178 | 2,0 | 90 | 5 |
| 05303 | 2,5 | 50 | 5 |
| 34555 | 2,5 | 70 | 5 |
| 39179 | 2,5 | 90 | 5 |
| 04194 | 3,0 | 50 | 5 |
| 34556 | 3,0 | 70 | 5 |
| 39180 | 3,0 | 90 | 5 |
| 04195 | 4,0 | 50 | 5 |
| 34557 | 4,0 | 70 | 5 |
| 39181 | 4,0 | 90 | 5 |
| 04196 | 5,0 | 50 | 5 |
| 34558 | 5,0 | 70 | 5 |
| 39182 | 5,0 | 90 | 5 |
| 04197 | 6,0 | 50 | 5 |
| 34559 | 6,0 | 70 | 5 |
| 39183 | 6,0 | 90 | 5 |
| 04198 | 8,0 | 50 | 5 |
| 34560 | 8,0 | 70 | 5 |

■ Square 1/4"

7045 Z TR

5

5

5


7048 Z


| Order-No. | | | mm | Ħ |
|-----------|----|-----|----|---|
| 06637 | #1 | 2,3 | 50 | 5 |
| 39206 | #1 | 2,3 | 90 | 5 |
| 06638 | #2 | 2,8 | 50 | 5 |
| 39207 | #2 | 2,8 | 90 | 5 |
| 06639 | #3 | 3,3 | 50 | 5 |
| 39208 | #3 | 3,3 | 90 | 5 |
| | | | | |

⊕Torq-Set® 1/4"

7049 TS

| Order-No. | ⊕ | mm | |
|-----------|----------|----|---|
| 22596 | 4 | 50 | 5 |
| 22597 | 5 | 50 | 5 |
| 22598 | 6 | 50 | 5 |
| 22599 | 8 | 50 | 5 |
| 22600 | 10 | 50 | 5 |

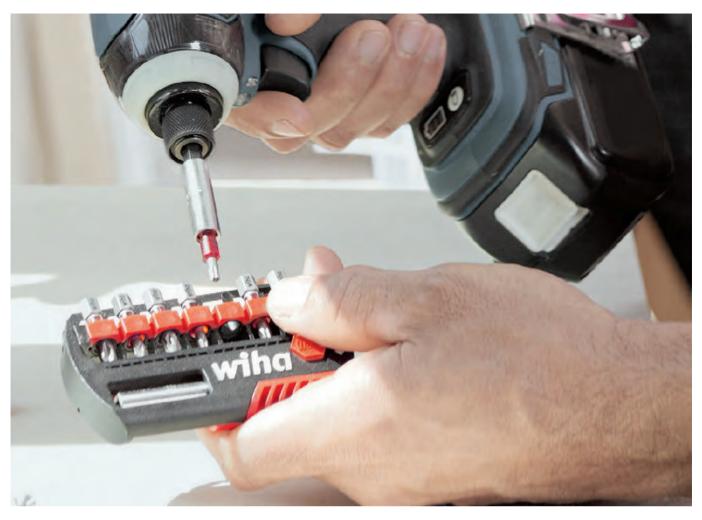

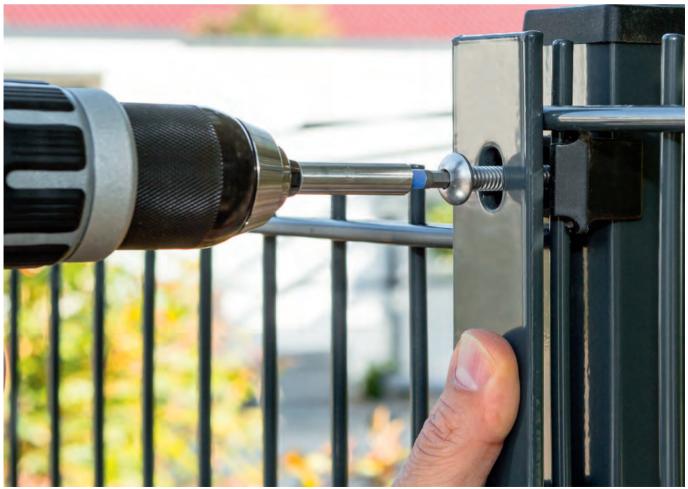

Perfect order when fast work is required.



Perfect order and easy handling - the ErgoStar L-key holder provides both: Rotating a single L-key in the holder means that all other keys rotate at the same angle! Keys sitting next to each other no longer need to be disentangled. Instead, all keys are ready for removal with one turn - as fast and easy as never before. The keys of the ErgoStar also help to make work significantly easier: The Wiha L-key set, made of fully hardened chrome vanadium steel, includes an innovation that will convince everyone. A spring steel ring holds hexagon screws reliably.

• Simplifies your work

The ball end facilitates access to screws and allows you to work at an angle of up to 25°.

Increases your efficiency


Wiha MagicRing® retaining function holds all screws firmly in place – without any magnets.


Makes handling easier

Always the correct key when you need it.

Saves time

Ensures order: removing and targeted insertion in the holder is child's play.

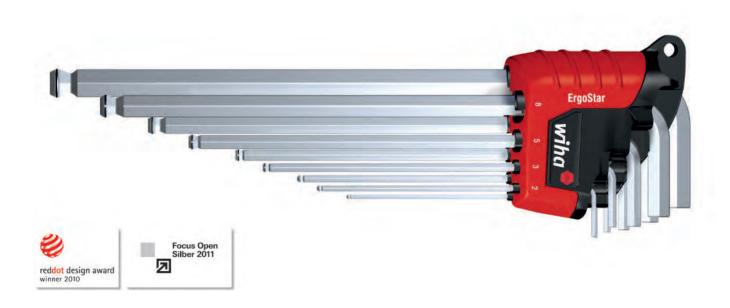

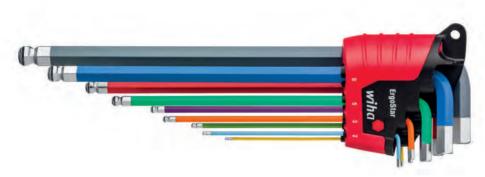









Simplifies your work: The ball end facilitates access to screws and allows you to work at an angle of up to 25°. Lowers your costs: Reduces the risk of forgetting and leaving keys inside a machine and causing damage. Makes handling easier: Always the correct key when you need it. Increases your efficiency: Coloured L-keys quick and easy to find – also in dark environments thanks to fluorescent paint visible in UV light. The required key width can be quickly found thanks to colour coding. Wiha MagicRing® holding feature holds all hex screws in place without a magnet.

hexagonal ball Magicring® 9-pcs. in flourescent colour

| 2 | 6 | a | R | P |
|---|---|---|---|---|

| Order-No | -No. | |
|----------|------------------------|---|
| 41979 | | 5 |
| | 1,5 / 2 / 2,5 | |
| | 3 / 4 / 5 / 6 / 8 / 10 | |

MagicRing® from size 3 mm. Based on ISO 2936L.

INFOBOX:

Tools in fluorescent colour





- Coloured bits and ErgoStar with coloured L-keys light up under a UV light.
- Ensuring misplaced tools are quickly and easily found again.
- The Wiha flashlight with a UV light makes the perfect complement to coloured fluorescent tools.







Simplifies your work: The ball end facilitates access to screws and allows you to work at an angle of up to 25°. Lowers your costs: Highly durable thanks to high-quality, chrome-plated L-key surface to prevent corrosion. Makes handling easier: Always the correct key when you need it. Saves time: Ensures order: removing and targeted insertion in the holder is child's play. Increases your efficiency: Wiha MagicRing® holding feature holds all hex screws in place without a magnet.

Hexagonal ball end MagicRing® matt chrome-plated 9-pcs.

369R

| Order-No. | |
|------------------------|---|
| 37351 | 5 |
| 1,5 / 2 / 2,5 | |
| 3 / 4 / 5 / 6 / 8 / 10 | |

MagicRing® from size 3 mm. Based on ISO 2936L.

INFOBOX: MagicRing®



Wiha MagicRing®

- Spring steel ring reliably holds hex screws in place
- An innovation, which will benefit each user.

L-key set in Compact holder



Hexagonal ball end, 11-pcs., matt chrome-plated in blister pack

SB 369 H11

Order-No.

36454

5

1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 7 / 8 / 9 / 10

Including 7 mm and 9 mm special sizes.
Based on ISO 2936L.

L-key set in ErgoStar holder





Simplifies your work: The ball end facilitates access to screws and allows you to work at an angle of up to 25°. **Makes handling easier:** Always the correct key when you need it. **Saves time:** Ensures order: removing and targeted insertion in the holder is child's play.

L-key set in Compact holder



Hexagonal ball end, 9-pcs., matt chrome-plated in blister pack

| | | SB 369 H9 |
|--------------|---------------------------------|-----------|
| Order-No. | | |
| 02292 | | 5 |
| | 1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / | 8 / 10 |
| Based on ISC | | |

TORX® ball end, 13-pcs., black oxidised

366BE

| Order-No. | | | | | | | | | | | | | | | | | |
|------------|------|--------|-----|-----|---|-----|---|-----|---|-----|---|-----|---|-----|---|-----|--|
| 36487 | | | | | | | | | | | | | | 5 | | | |
| (*) | T5 / | / T6 / | ′ T | 7 / | T | 3 | | | | | | | | | | | |
| ③ | T9 / | ′ T10 | / | T15 | / | T20 | / | T25 | / | T27 | / | T30 | / | T40 | / | T45 | |

TORX® ball end from size T9

INFOBOX: Ball end hex



Wiha hexagonal ball end

• The ball end can be rotated by up to 25° in both clockwise and anti-clockwise direction.

INFOBOX:

TORX® ball end



Wiha TORX® ball end

- With optimised TORX® ball end geometry
- Increased strength thanks to the special cold forming on a system developed by Wiha especially for this purpose.
- Allows fastening and unfastening at angles up to 25°.
- Simple insertion of the tool/bit and fastening/ unfastening, especially in hard-to-reach positions.
- Broad product range: As an L-key, as a bit and as a SoftFinish® screwdriver.





 $\label{localization} \textbf{Increases your efficiency:} \ \ \textbf{Thread-conserving removal of the screw} \\ \text{without damage.}$

Hex, 16-pcs. with spiral drill bit in box

| 4 | 0 | _ |
|---|---|---|
| 4 | U | C |

| | • | 400 |
|----------|--|-----|
| Order-No | . 🔒 | |
| 03988 | 10 | |
| • | 2,3 / 2,8 / 3,4 / 4,5 / 5,7 / 6,8 / 9,0 / 11,0 |) |
| | 2,0 / 2,5 / 3,0 / 4 / 5 / 6 / 8 / 10 | |




Trimming / cutting

A cut above the rest with Wiha.

A precise cut at the right time - no problem for Wiha diagonal cutters, heavy-duty diagonal cutters, cable cutters, cable shears and combination pliers. With the perfect combination of high-quality materials and ergonomic comfort, Wiha VDE-tools withstand the toughest demands. Production is in accordance to the state-of-the-art quality management guidelines. A special heat treatment and inductive hardening of the parts under high stress ensure a long lifespan. The precise interaction of the joints and the exacting quality workmanship of the blades and gripping surfaces ensure the highest level of functionality.

All Wiha products have been designed according to the latest findings in ergonomics. Ergonomic handles and well thought-out soft and hard zone distribution makes for workthat protects the hands from strain and is comfortable.

"With BiCut®, I always have sufficient power when cutting - and without aching fingers." Timo Schweitzer

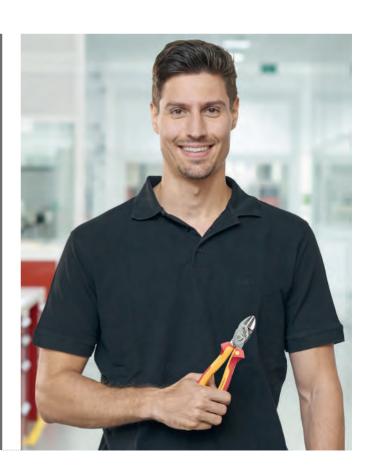

Double your power at the push of a button.



Precise and safe work – at double the power: no problem for the Wiha BiCut® Professional electric diagonal cutters. If there is not enough power when cutting, or if cutting is laborious, a simple push of a button is all that is required and the cutting power is doubled. Another push of the button, and the power is halved again – easy! This significantly reduces the risk of cramp or slippage when applying too much force. The extra-wide back for the handle, with perfectly distributed soft and hard zones, ensures the optimum ergonomics. The new Wiha BiCut® has already been awarded with the "reddot award 2014winner" for outstanding design quality.

Increases your efficiency

Two pliers in one - 200 % power at the touch of a button, available at any time.

Protect your health

Requires less force and reduces pressure on the wrists.

Offers you full protection

Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.













Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. **Protect your health:** Requires less force and reduces pressure on the wrists. **Increases your efficiency:** Two pliers in one - 200 % power at the touch of a button, available at any time. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.



Switchable

Z 18 0 06

| Best. Nr. | mm → | ↔ | ≫(| Ømm | = |
|-----------|--------|----------|----|-----|----------|
| 38191 | 200 | 8 | 21 | 3 | 5 |

Manufactured acc. to IEC 60900.

INFOBOX: Safety note



 When working with cutting pliers - beware of wire ends flying off. Please wear safety glasses.

INFOBOX:

Cutting capacity info

| ※ | Example |
|----------|-----------------------|
| 1 - 5 | copper,aluminium |
| 6 - 10 | Iron nails |
| 11 - 15 | Screws |
| 16 - 21 | Hardened spring steel |









Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. **Increases your safety:** Wiha combination pliers enable safe, non-slip gripping in all work situations. **Protect your health:** Special DynamicJoint® design reduces effort required for cutting. **Increases your efficiency:** Wiha needle nose pliers with extra-long plier head for inserting low-lying components. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Combination pliers, needle nose pliers, diagonal cutters 3-pcs.

Z 99 0 001 06

| Order-N | o. (=) |
|---|---|
| 26852 | 1 |
| Trimmi | ng / cutting |
| X | Professional electric diagonal cutters with DynamicJoint® 160 x 6 1/2" (43335) |
| Supplyi | ng / holding |
| *************************************** | Combination pliers Professional electric with DynamicJoint® and OptiGrip with extra long cutting edge, VDE and GS tested / 180 mm, 7" (26708) |
| • | Needle nose pliers Professional electric with cutting edge straight shape, VDE and GS tested / 200 mm, 8" (26727) |
| Manufactu | ured acc. to IEC 60900. |

Professional electric diagonal cutters with DynamicJoint®





Heavy-duty diagonal cutters Professional electric with DynamicJoint®













Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. **Protect your health:** Special DynamicJoint® design reduces effort required for cutting. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Simplifies your work: Up to 40% more cutting force thanks to optimised leverage. Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Protect your health: Special DynamicJoint® design reduces effort required for cutting. Reduces strain from continuous work thanks to opening spring. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Z 12 1 06

11 Order-No. mm ≫ Ømm 43326 140 5 1/2" 16 1,6 5 43335 6 1/2" 2 5 160 17 43340 180 18 2,3 5 Manufactured acc. to IEC 60900.

.....

with switchable opening spring

Z 16 3 06

| Order-No. | $\stackrel{\longleftarrow}{mm}$ | ₩ | ≫(| Ømm | |
|---------------|---------------------------------|-----|----|-----|---|
| 40921 | 160 | 6,5 | 17 | 2 | 5 |
| 41274 | 180 | 7 | 18 | 2,3 | 5 |
| 41279 | 200 | 8 | 19 | 2,5 | 5 |
| DIN ISO 5749. | | | | | |

INFOBOX: DynamicJoint®





Wiha DynamicJoint® – A new dimension in strength and durability

- Innovative: Optimised joint construction.
- Effective: Minimal power loss means less force needed for cutting.
- Permanent: Optimal performance even after thousands of cuts.







Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. **Protect your health:** Reduces strain from continuous work thanks to opening spring. **Increases your efficiency:** Clean work thanks to cable cutting without crushing. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

with switchable opening spring

Z 50 1 06

| Order-No. | mm | ₩ | mm² | Ħ |
|-----------|-----|-------|-----|---|
| 43660 | 180 | 7 | 50 | 5 |
| 43662 | 210 | 8 1/4 | 60 | 5 |

Manufactured acc. to IEC 60900.

INFOBOX:

Heavy-duty diagonal cutters & Cable cutters









with switchable opening spring

- Up to 40% more cutting force thanks to optimised leverage.
- Opening spring with on/off function for fatigue-free
 work
- Opening spring can be activated with just one hand.

Combination pliers Professional electric with DynamicJoint® and OptiGrip

High-leverage combination pliers Professional electric with DynamicJoint® and OptiGrip

















Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Protect your health: Special DynamicJoint® design reduces effort required for cutting. Increases your efficiency: A secure, non-slip grip in all standard work situations. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Simplifies your work: Up to 40% more cutting force thanks to optimised leverage. Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Protect your health: Special DynamicJoint® design reduces effort required for cutting. Increases your efficiency: A secure, non-slip grip in all standard work situations. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

with extra long cutting edge

Z 01 0 06

| Order-No. | ₩₩ | ₩ | ≫(| Ømm | |
|-----------|-----|-----|----|-----|---|
| 26705 | 160 | 6 ½ | 15 | 1,6 | 5 |
| 26708 | 180 | 7 | 16 | 1,8 | 5 |
| 26711 | 200 | 8 | 17 | 2 | 5 |

DIN ISO 5746. Manufactured acc. to IEC 60900.

with extra long cutting edge

Z 02 0 06

| Order-No. | ₩₩ | ₩ | ≫(| Ømm | |
|-----------|-----|---|----|-----|---|
| 26714 | 200 | 8 | 18 | 2,3 | 5 |
| 26717 | 225 | 9 | 19 | 2,5 | 5 |

DIN ISO 5746. Manufactured acc. to IEC 60900.

INFOBOX: OptiGrip





Wiha OptiGrip – optimal grip due to newly designed gripping surfaces

- A firm hold: The "triple-point support" protects the workpiece from twisting or slipping.
- Highly effective: Optimum grip even with large jaw opening – and at the same time significantly less force needed
- A wide selection: Now in standard Wiha combination pliers and high leverage combination pliers.

Precision mechanic's diagonal cutters Classic



Plastic diagonal cutters Classic



Meets your requirements: For almost flush cutting of soft and semi-hard wires. **Protect your health:** Reduced risk of injury thanks to smooth burr-free finished results, for example with cable ties.

Meets your requirements: For the smooth and flush cutting of plastics. **Protect your health:** Reduced risk of injury thanks to smooth burr-free finished results, for example with cable ties.

with opening spring

Z 44 3 01

| Order-No. | $\stackrel{\longleftarrow}{mm}$ | ↔ | ≫(| Ømm | |
|--------------|---------------------------------|----------|-------|-----|---|
| 36189 | 125 | 5 | 7 | 0,8 | 5 |
| DIN ISO 5749 | | • | ••••• | | |

with opening spring without bevelled edge

7 15 0 01

| Order-No. | ₩₩ | ₩ | ≫(| |
|---------------|-----|-----|----|---|
| 37402 | 125 | 5 | 2 | 5 |
| 37403 | 160 | 6 ½ | 3 | 5 |
| DIN ISO 5743. | • | | • | |

Shear for electricians







Simplifies your work: Large blade notch and micro-toothed cutting edge prevent the cable from slipping out of the shears. Increases your safety: Protective cover with retaining clip for safe carrying. Makes handling easier: The combination between a sturdy blade and an ergonomic handle with extra large handle holes enable users to make a flawless cut into cables up to 50 mm². Increases your efficiency: Shear for electricians with stripping, skinning, crimping & cutting-to-length functions in a single tool.

Lowers your costs: Durable and sturdy thanks to bimetallic saw blade. **Makes handling easier:** The ergonomic handle is suitable for both right- and left-handed users* Using the plastic screw, the saw blade can be changed quickly and easily. **Increases your efficiency:** The fine-toothed saw blade allows a clean cut, for example on plastic pipes and metal cable ducts. **Offers you full protection:** Each tool individually tested at 10,000 V AC and usable for 1,000 V AC.


with crimp function in blister pack

Z 71 7 06

| Order-No. | mm | mm² | = |
|-----------|-----|-----|----------|
| 41923 | 160 | 50 | 5 |

insulated with three saw blades 150 mm

| Order-No. | **** | ₩m | SB | |
|-----------|------|-----|----|---|
| 43125 | 150 | 280 | Х | 1 |

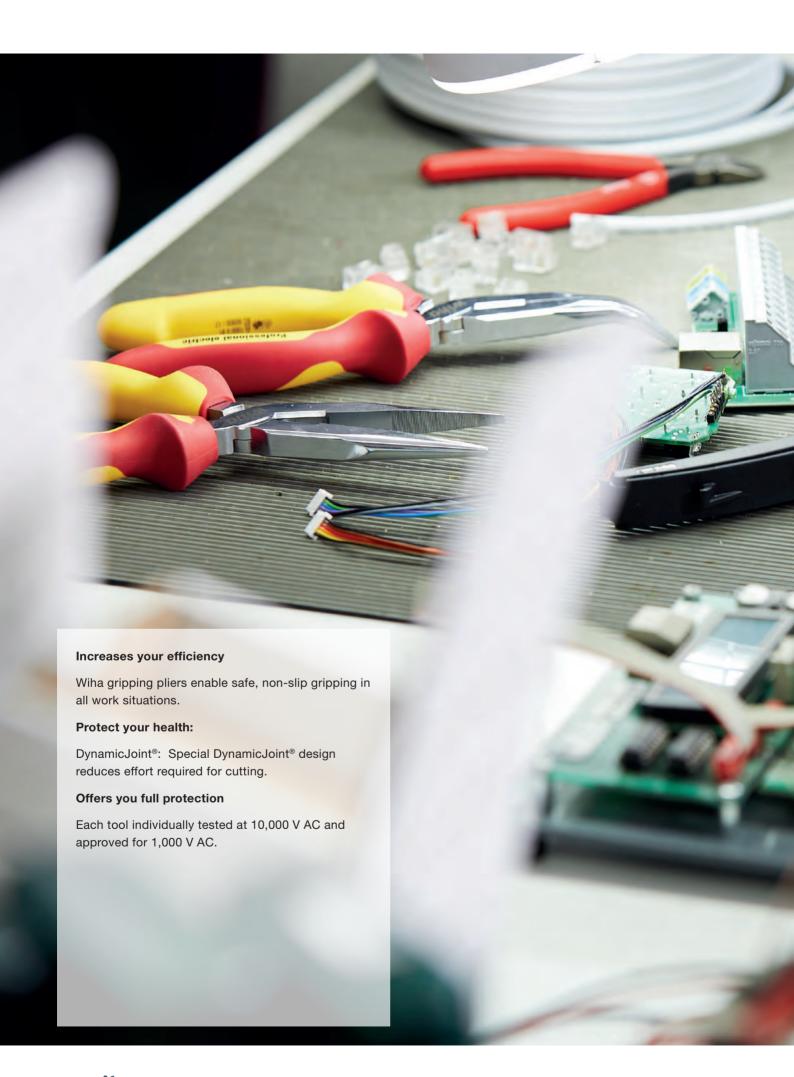

Supplying / holding

Supplying - completely relaxed.

In the supplying and holding working procedures, Wiha pliers prove to be clever helpers for relaxed and efficient work. For instance, the OptiGrip of the combination and high-leverage combination pliers ensure optimal and secure holding using an innovative gripping surface: The unique 'triple-point support' protects the work piece from twisting or slipping. The circlip pliers from the Classic Series with their MagicTips® precision tips made of high-performance steel offer considerable additional safety and stability. Their special latching function is especially useful against in preventing the circlips jumping off.

"You only have to lose a circlip, and then you realize the benefits of Wiha pliers!"
Frank Scheck



Needle nose pliers Professional electric



Combination pliers Professional electric with DynamicJoint® and









Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Increases your efficiency: Extralong plier head for inserting low-lying components. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Protect your health: Special DynamicJoint® design reduces effort required for cutting. Increases your efficiency: A secure, non-slip grip in all standard work situations. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

with cutting edge straight shape

7 05 0 06

| Order-No. | ₩₩ | ₩ | ≫(| Ømm | | | | |
|---|-----|-----|----|-----|---|--|--|--|
| 26720 | 160 | 6 ½ | 16 | 1,2 | 5 | | | |
| 26727 | 200 | 8 | 17 | 1,6 | 5 | | | |
| DIN ISO 5745. Manufactured acc. to IEC 60900. | | | | | | | | |

with extra long cutting edge

7 01 0 06

| Order-No. | ₩₩ | ₩ | ≫(| Ømm | £ | | |
|---|-----|-----|----|-----|----------|--|--|
| 26705 | 160 | 6 ½ | 15 | 1,6 | 5 | | |
| 26708 | 180 | 7 | 16 | 1,8 | 5 | | |
| 26711 | 200 | 8 | 17 | 2 | 5 | | |
| DIN ISO 5746. Manufactured acc. to IEC 60900. | | | | | | | |

Needle nose pliers Professional electric



Water pump pliers Professional electric





Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Increases your efficiency: Extralong plier head for inserting low-lying components. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Meets your requirements: Permanently stable through box joint with double guidance. Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Increases your efficiency: Fast and simple adjustment of pliers with push button. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

with cutting edge curved shape, approx. 40°

Z 05 1 06

| Order-No. | ₩m | ₩ | ≫(| Ømm | | | | |
|---|-----|-----|----|-----|---|--|--|--|
| 26728 | 160 | 6 ½ | 16 | 1,2 | 5 | | | |
| 26729 | 200 | 8 | 17 | 1,6 | 5 | | | |
| DIN ISO 5745. Manufactured acc. to IEC 60900. | | | | | | | | |

with push button adjustment

Z 22 0 06

| Order-No. | mm | ₩ | 0; | O ; | £ | | | |
|---|-----|----|----|------------|----------|--|--|--|
| 37450 | 250 | 10 | 2 | 50 | 5 | | | |
| DIN ISO 8976. Manufactured acc. to IEC 60900. | | | | | | | | |

High-leverage combination pliers Professional electric with DynamicJoint® and OptiGrip









Long flat-nose pliers Professional electric





Simplifies your work: Up to 40% more cutting force thanks to optimised leverage. Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Protect your health: Special DynamicJoint® design reduces effort required for cutting. Increases your efficiency: A secure, non-slip grip in all standard work situations. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Increases your efficiency: Extra-long plier head for inserting low-lying components. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

with extra long cutting edge

Z 02 0 06

| Order-No. | ₩₩ | ₩ | ≫(| Ømm | (|
|-----------|-----|---|----|-----|----------|
| 26714 | 200 | 8 | 18 | 2,3 | 5 |
| 26717 | 225 | 9 | 19 | 2,5 | 5 |

DIN ISO 5746. Manufactured acc. to IEC 60900.

| | Z 07 0 06 |
|------------|-----------|
| | |
| ← ← | / \ |

| Order-No. | ₩m | ₩ | | | | |
|--|----|---|---|--|--|--|
| 26732 | | | 5 | | | |
| DIN ISO 5745 Manufactured and to IEC 60000 | | | | | | |

Water pump pliers Professional electric





Meets your requirements: Permanently stable through box joint with double guidance. **Lowers your costs:** Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Long round-nose pliers Professional electric





Increases your efficiency: Extra-long plier head for inserting low-lying components. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

box type

Z 21 0 06

| Order-No. | mm | ₩ | 0; | o ; | | | | |
|---|-----|----|----|------------|---|--|--|--|
| 33520 | 250 | 10 | 2 | 50 | 5 | | | |
| DIN ISO 8976. Manufactured acc. to IEC 60900. | | | | | | | | |

| | | | Z 09 0 06 | | | |
|---|-----|-----|-----------|--|--|--|
| Order-No. | ₩₩ | ₩ | Ĺ | | | |
| 26735 | 160 | 6 ½ | 5 | | | |
| DIN ISO 5745 Manufactured acc. to IEC 60900 | | | | | | |

Pliers wrench Classic



Simplifies your work: Self-locking at AF 17 and above. Also suitable for left-handed users as operated without side push button. Lowers your costs: Minimises wear and prevents damage to sensitive surfaces thanks to smooth, parallel jaws and backlash-free handling. Saves space: Replaces a set of metric and imperial open-ended spanners. Protect your health: Compaction and bending tasks take minimum effort thanks to manual force increased tenfold. Saves time: Safe, rapid setting directly on the work piece with no need to press any buttons. Ratchet function allows users to fasten screws instantly with a simple glide. Improved access: Slender design thanks to button-free setting enables it to be used in confined working environments, minimising the risk of damage.

Z 25 0 01

| | mm | | | = |
|-------|-----|----|----|----------|
| 40923 | 250 | 10 | 46 | 6 |


INFOBOX:

Plier wrench






- Required width setting directly on the work piece with no need to press any buttons.
- Ratchet principle allows users to fasten screws rapidly with a simple glide.
- Thanks to its slim design and button-free setting, it is ideal for use in tight spaces.
- Smooth, parallel-acting jaws prevent damage on sensitive surfaces.

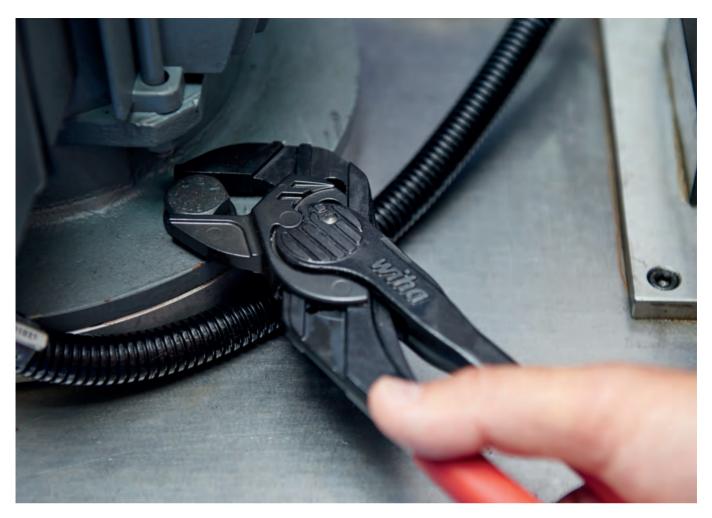



For those situations where a good grip is essential.

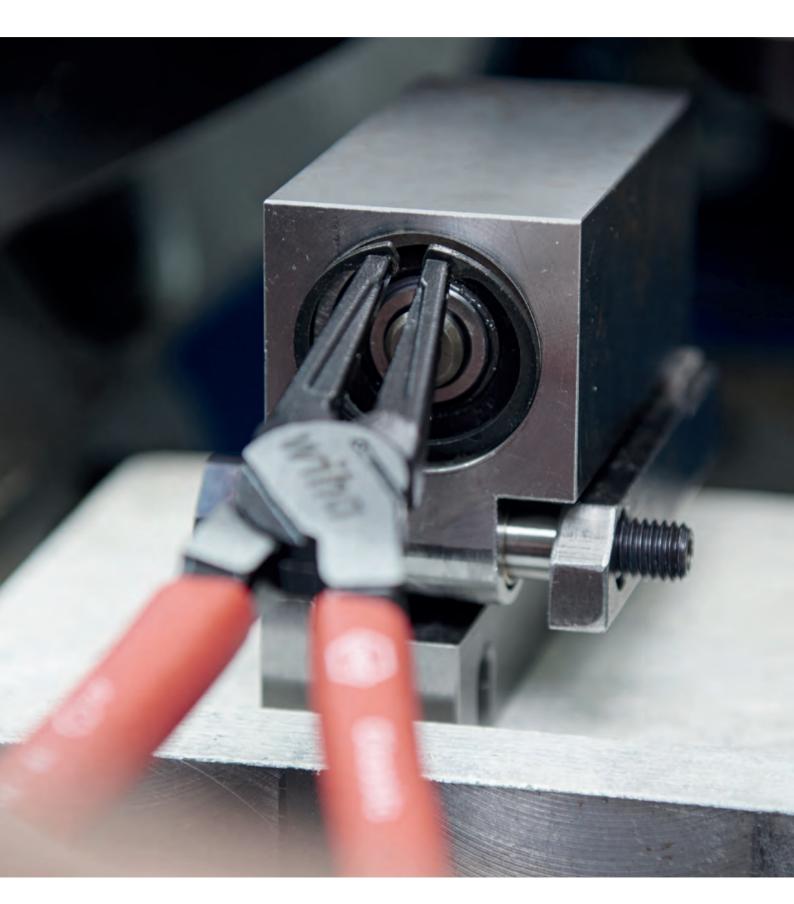

They make our circlip pliers for the Classic series head and shoulders above the rest: MagicTips®, the precision tips made of high-performance steel. Additionally hardened, they offer a high level of resistance to wear and therefore ensure a long shelf-life. The special latching feature is as unique as it is useful, and prevents jumping of the circlips and therefore any reworking in the motor or working space caused by lost circlips. And thanks to the non-slip pliers handle, precise work is also guaranteed in unfavourable situations. Hard as nails, durable, safe, accurate: These qualities make Wiha MagicTips® circlip pliers useful and indispensable helpers during day-to-day work.

• Lowers your costs

Prevents damage caused by lost circlips in the work area.

Saves time

Safe and sturdy grip on circlips.







Lowers your costs: Prevents damage caused by lost circlips in the work area. Saves time: Safe and sturdy grip on circlips.

Circlip pliers 4-pcs.

Z 99 0 007 01 Order-No. 34708 Supplying / holding ೦ Circlip pliers Classic with MagicTips® For inner rings (drill holes) J 1, 140 mm (34689) / J 2, 180 mm (34690) Circlip pliers Classic with MagicTips® For outer rings (shafts) A 1, 140 mm (34699) / A 2, 185 mm (34700)

- with safety latching function
- DIN ISO 5254 & 5256

INFOBOX: **MagicTips®**







Wiha MagicTips® - Top of their class.

- Maximum grip: The special latching function preventing jumping away of the safety rings makes the Wiha circlip pliers truly unique.
- Hard as steel: Additional hardening of tips means high wear resistance and therefore excellent durability.
- Precise: Precision tips of high performance steel for maximum grip and high stability.

Classic circlip pliers with MagicTips®, straight





Classic circlip pliers with MagicTips®, angled





Lowers your costs: Prevents damage caused by lost circlips in the work area. Saves time: Safe and sturdy grip on circlips.

Lowers your costs: Prevents damage caused by lost circlips in the work area. Saves time: Safe and sturdy grip on circlips.

For inner rings (drill holes)

| For inner i | rings (| drill ho | Z 33 4 01 | | |
|-------------|---------|----------|-----------|--------|---|
| Order-No. | Тур | ₩₩ | ₩ | ೮ | |
| 34688 | JO | 140 | 5 ½ | 8-13 | 5 |
| 34689 | J 1 | 140 | 5 ½ | 12-25 | 5 |
| 34690 | J 2• | 180 | 7 | 19-60 | 5 |
| 34691 | J 3• | 220 | 9 | 40-100 | 5 |
| 34692 | J 4• | 305 | 12 | 85-140 | 5 |

• with safety latching function DIN ISO 5256.

For inner rings (drill holes)

Z 33 5 01

| Order-No. | Тур | $\stackrel{\longleftarrow}{mm}$ | ₩ | ೮ | () |
|-----------|-------|---------------------------------|----------|--------|------------|
| 34693 | J 01 | 140 | 5 ½ | 8-13 | 5 |
| 34694 | J 11 | 140 | 5 ½ | 12-25 | 5 |
| 34695 | J 21• | 180 | 7 | 19-60 | 5 |
| 34696 | J 31• | 220 | 9 | 40-100 | 5 |
| 34697 | J 41• | | | 85-140 | 5 |

with safety latching function DIN ISO 5256.

Classic circlip pliers with MagicTips®, straight





Classic circlip pliers with MagicTips®, angled





Lowers your costs: Prevents damage caused by lost circlips in the work area. Saves time: Safe and sturdy grip on circlips.

Lowers your costs: Prevents damage caused by lost circlips in the work area. Saves time: Safe and sturdy grip on circlips.

r ringo (chafta)

| For outer rings (shafts) | | | | | | | | |
|--------------------------|------|-----|-----|------------|---|--|--|--|
| Order-No. | Тур | ₩₩ | ₩ | $^{\circ}$ | | | | |
| 34698 | Α0 | 140 | 5 ½ | 7-10 | 5 | | | |
| 34699 | A 1 | 140 | 5 ½ | 10-25 | 5 | | | |
| 34700 | A 2• | 185 | 7 | 19-60 | 5 | | | |
| 34701 | A 3• | 240 | 9 | 40-100 | 5 | | | |
| 34702 | A 4• | 300 | 12 | 85-140 | 5 | | | |

 with safety latching function DIN ISO 5254.

For outer rings (shafts)

Z 34 5 01

| Order-No. | Тур | $\stackrel{\longleftarrow}{mm}$ | $\stackrel{\longleftarrow}{\coprod}$ | $^{\circ}$ | (|
|-----------|-------|---------------------------------|--------------------------------------|------------|----------|
| 34703 | A 01 | 140 | 5 ½ | 7-10 | 5 |
| 34704 | A 11 | 140 | 5 ½ | 10-25 | 5 |
| 34705 | A 21• | 185 | 7 | 19-60 | 5 |
| 34706 | A 31• | 240 | 9 | 40-100 | 5 |
| 34707 | A 41• | 300 | 12 | 85-140 | 5 |

with safety latching function

DIN ISO 5254.



Stripping/ insulating / crimping For tidy cable ends.

Wiha crimping tools guarantee clean, precise crimping of components. Wiha offers a range of crimp tools for a great variety of applications, including wire-end sleeve, male blade connectors as well as cable eyes and contacts. A special highlight are the automatic crimping pliers with hex crimping for processing wire-end sleeves with and without insulating collars. Due to the large crimping range from 0.08 – 16 mm² only one tool is required for working on wire-end sleeves with larger and smaller diameters. At the same high quality level as the the automatic crimping pliers, the crimp tools for cable eyes, contacts and male blade connectors also guarantee absolute crimping process safety coupled with comfortable work thanks to their impact-reducing plastic handles. The "electrical engineering accessories" product range offers the ideal solutions to complement the crimp tools, including superior quality innovatively packaged wire-end sleeves and connectors.

"Due to the large crimping range of the automatic crimping pliers I always have the right tool for practically all wire-end sleeves at my disposal. Even with wire-end sleeves with small diameters, the crimping process is problem-free thanks to the feed aid."

Ralf Flaig



Three functions – one tool.



Less tools means less weight, better handling and more efficient work. The Wiha Professional electric TriCut installation pliers combine three tools in one, ideal for the three operations cutting-to-length, stripping and skinning. And it does all this while saving you energy: Due to an ergonomically shaped, specifically angled plier head forged from high-quality steel. The low-wear, inlaid joint with heavy-duty riveting makes the pliers particularly robust and durable, and production and testing according to IEC 60900, VDE/ GS certification and individual piece testing at 10,000 V AC ensures uncompromising safety.

Cutting Stripping Skinning Insulation

• Simplifies your work

The angled shape of the head allows work to be performed in hard-to-reach spaces such as installation boxes.

Increases your efficiency

Three tools in one. Saves 60% volume and 50% less weight for 100% efficiency.

Lowers your costs

Now you only need one tool for three tasks: cutting to length, stripping and skinning.

Offers you full protection

Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.



Installation pliers TriCut Professional electric





Simplifies your work: The angled head allows you to work in hard-to-reach places such as installation sockets. **Lowers your costs:** Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. **Saves money:** Now you only need one tool for three tasks: cutting to length, stripping and skinning. **Increases your efficiency:** Three tools in one. Saves 60% volume and 50% less weight for 100% efficiency. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Z 14 1 06

| Best. Nr. | mm | ₩ | ≫(| Ømm | |
|-----------|-----|---|----|-----|---|
| 38552 | 170 | 7 | 13 | 1,6 | 5 |

Manufactured acc. to IFC 60900.



Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. **Saves money:** Two tools in one for cutting to length and skinning. **Protect your health:** Special DynamicJoint® design reduces effort required for cutting. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Z 14 0 06

| Order-No. | ₩₩ | ₩ | ≫(| Ømm | |
|---|-----|-----|----|-----|---|
| 26745 | 160 | 6 ½ | 13 | 1,6 | 5 |
| DIN ISO 57/9. Manufactured acc to IEC 60900 | | | | | |

INFOBOX:

Cutting capacity info

| ※ | Example |
|----------|-----------------------|
| 1 - 5 | copper,aluminium |
| 6 - 10 | Iron nails |
| 11 - 15 | Screws |
| 16 - 21 | Hardened spring steel |

Stripping pliers Professional electric





Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. **Protect your health:** Reduces strain from continuous work thanks to opening spring. **Increases your efficiency:** Skinning of several cross-sections due to wide variety of settings. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| 7 | 55 | 0 | 0 |
|---|----|---|---|
| | | | |

| Order-No. | mm | ₩ | Ø | mm² | (|
|--|-----|-----|---|-----|----------|
| 26847 | 160 | 6 ½ | 5 | 10 | 5 |
| DIN ISO 5742. Magnifectured ago to IEC 60000 | | | | | |

Stripping tool



Simplifies your work: Perfect handling thanks to ergonomic handle shape. Saves time: Automatic setting from round to length cutting. Increases your efficiency: Skinning of all standard cross-sections through continuous setting. Saves time: Colour code 1 (FR)

with self-rotating trailing blade

| | , | | • | 24622 |
|-----------|-----|----|--------|-------|
| Order-No. | ₩₩ | ₩ | Ømm | |
| 35969 | 165 | 6½ | 4,0-28 | 1 |

Stripping tool



Simplifies your work: Enables stripping in hard-to-reach places such as installation sockets.

for round cable, in blister pack

| | • | | 24677 | | |
|-----------|-----|---|-------|----|---|
| Order-No. | ₩₩ | ₩ | mm² | SB | |
| 36052 | 125 | 5 | 8-13 | Χ | 1 |

Cable stripping knife



Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

straight cutting edge for round cables in blister pack

| _ | _ | _ | | | 24680 |
|--------------|------------|--------|----|---|-------|
| Order-No. | ₩₩ | ₩ | SB | | |
| 38798 | 200 | 8 | X | 1 | |
| Manufactured | acc. to IE | C 6090 | Ö. | | |

Cable stripping knife





24678

Lowers your costs: No damage to wire insulation through sliding shoe on tip.

hooked blade with sliding shoe for round cable, in blister pack

| Order-No. | | ₩ | (SB) | |
|--------------|-----|---|------|---|
| 36053 | 200 | 8 | Χ | 1 |
| Manufactured | | | | |

Stripping tool



Simplifies your work: Enables incremental cable stripping and skinning in hard-to-reach places such as installation sockets.

for coaxial cable, in blister pack

| Order-No. | ₩₩ | ₩ | mm² | SB | |
|-----------|-----|------|---------|----|---|
| 36051 | 110 | 41⁄4 | 4,8-7,5 | X | 1 |

Spare blade and gripping jaw set















Lowers your costs: Long-lasting and robust thanks to metal blade insert. **Protect your health:** Damper enclosed for large cable cross-sections to reduce recoil and protect wrists. **Saves time:** Blades quickly exchanged by immediately available replacement blades in the handle. **Increases your efficiency:** Automatic stripping pliers for a wide range of cables between 0.03 and 16 mm².

Spare part: Spare blade and gripping jaw set for automatic stripping pliers 42062

up to 16 mm² in blister pack

Z 57 0 06

| Order-No. | ₩₩ | ™ | mm² | AWG | SB | (=) |
|-----------|-----|----------|-----------|------|----|------------|
| 42062 | 200 | 8 | 0,03 - 16 | 32-5 | Χ | 1 |

for automatic stripping tool

Z 57 0 001 06K

| Order-No. | |
|-----------|---|
| 42162 | 1 |

INFOBOX:

Stripping tool, automatic up to 16mm²





- These pliers can handle a wide range of cables, thus combining two pairs of pliers in one.
- The supplied damper can be used to lessen recoil caused by larger cable gauges, such as those greater than 6 mm², thus helping to protect wrists.
- Precise cutting to length thanks to adjustable longitudinal stop.
- Integrated hand protection along the cutting edge guards against injury.





Simplifies your work: Unrestricted access to hard-to-reach work areas thanks to extremely slim handle shape. **Saves money:** Two tools in one for cutting to length and skinning. **Increases your efficiency:** Damage-free stripping thanks to automatic adjustment to cable diameter.

Increases your safety: Safe working through automatic pressing adjustment.

up to 6 mm² in blister pack

| Order-No. | ₩m | ₩ | mm² | AWG | SB | |
|-----------|-----|-----|---------|-------|----|---|
| 36050 | 190 | 7 ½ | 0,2-6,0 | 24-10 | X | 1 |

for wire-end sleeves

24675

Z 62 0 06

| Order-No. | ₩₩ | mm² | AWG | |
|-----------|-----|---------|------|---|
| 33844 | 220 | 0,14-16 | 26-5 | 1 |

For processing of wire-end sleeves with and without isolating collar according to DIN 46228, EN 50027.

Automatic crimp tool



Lowers your costs: An integrated lever enables users to interrupt the crimping process at any time to protect the pliers. **Increases your safety:** Safe work through feed aid prevents crimping the plastic cover of wire-end sleeves. **Makes handling easier:** Thanks to hexagonal crimping, small wire-end sleeves no longer get caught. **Increases your efficiency:** Automatic adjustment of wire-end sleeve size with suitable crimping force for a large coverage area of 0.08-16mm².

for wire-end sleeves hex crimping

Z 62 0 06

| 41246 210 0,08-16 28-5 | 1 |
|------------------------|---|

For processing twin sleeves and wire-end sleeves with or without insulating collar as per DIN 46228 & EN 50027

Crimp tool



Increases your safety: Safe working through automatic pressing adjustment.

for insulated terminals and connectors

Z 62 0 06

| Order-No. | mm | mm² | AWG | |
|-----------|-----|-------|-----|---|
| 33841 | 220 | 0,5-6 | | 1 |

For processing of red, blue and yellow isolated terminals, pin-end terminals, contact pins, contact pin sleeves, circular pins, circular pin sleeves, batch connectors and parallel connectors according to DIN 46234.

Crimp tool



Increases your safety: Safe working through automatic pressing adjustment.

Crimping pliers Professional electric



Meets your requirements: Safe pressing in marked trapezoidal/ semi-circular profiles. **Lowers your costs:** Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

0,25-2,5

for non-insulated cable eye with closed sleeve

Z 62 0 06

35861

| Order-No. | ₩m | mm² | AWG | |
|-----------|-----|--------|------|---|
| 33843 | 220 | 0,1-16 | 26-6 | 1 |

For processing of non-isolated contact pins and contact pin sleeves according to DIN 46247 for standardised, solderless electrical connections.

| | | | | 2 00 0 00 |
|-----------|----|---|--|-----------|
| | • | • | ······································ | |
| Order-No. | ₩₩ | ₩ | mm² | |

5

DIN ISO 5743. Manufactured acc. to IEC 60900.

5 3/4

145

Crimp tool



Increases your safety: Safe working through automatic pressing adjustment.

Crimping pliers Professional electric



Meets your requirements: Safe pressing in marked trapezoidal/semi-circular profiles. Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

for non-insulated male blade connectors

Z 62 0 06


| Order-No. | mm | mm² | AWG | () |
|-----------|-----|--------|-------|------------|
| 33842 | 220 | 0,25-6 | 24-10 | 1 |

For processing of non-isolated contact pins and contact pin sleeves according to DIN 46247 for standardised, solderless electrical connections.

Order-No. mm iii mm² iii 35862 180 7 0,25-16 5


DIN ISO 5743. Manufactured acc. to IEC 60900.

28 wiha 🍩

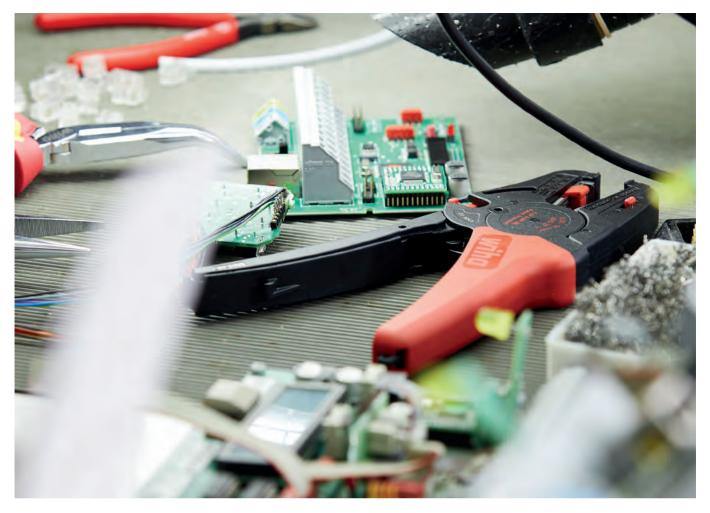



For a safe connection.

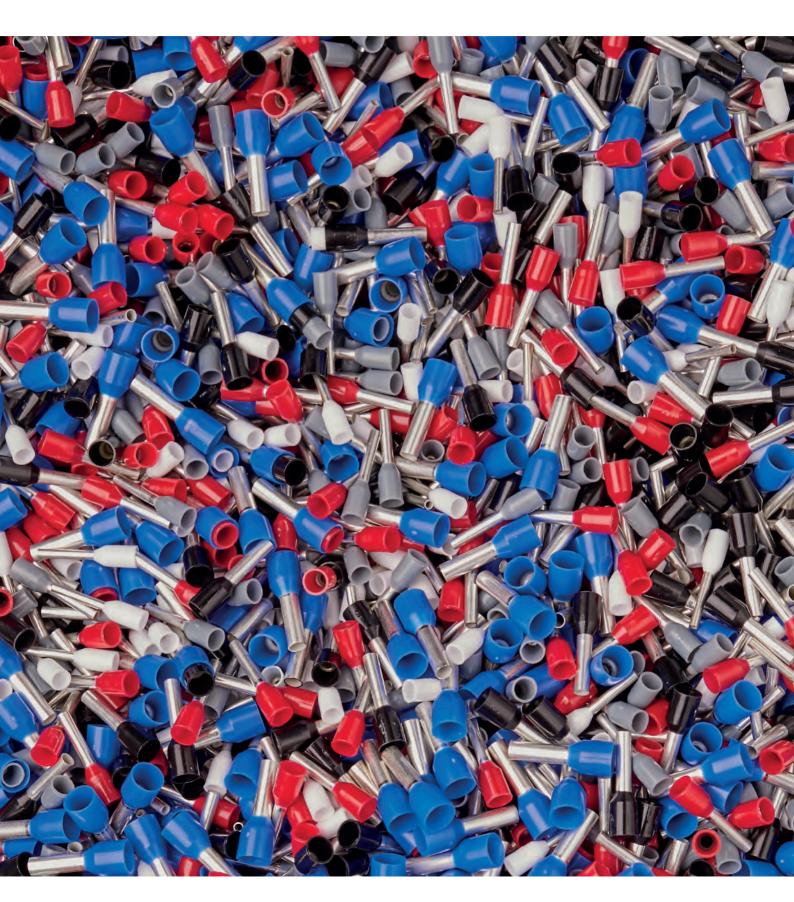



There are many pitfalls in conventional wiring installation. All-too-familiar problems include wires skinned incorrectly, twisted crimps in the pliers or poorly pressed sleeves. The comprehensive set by Wiha provides you with the right professional tools, including a wide selection of the most commonly used connectors and wire end sleeves, clearly arranged in an assortment case for portable use or for vehicles. Wiha's automatic stripping pliers promise to deliver "Skinning made easy". Users can skin cables ranging between 0.03 and 16 mm² with just one set of pliers. The automatic crimping pliers with hex crimping can handle wire-end sleeves between 0.08 and 16 mm² and twin wire end sleeves up to 10 mm². The automatic crimp tool for insulated cable eyes and contacts is designed for a crimping range between 0.5 and 6 mm² and thus covers most applications in the small and medium cable gauge range. Wiha's standard-compliant wire end sleeves and connectors offer heat resistance up to 105 °C.

Increases your process safety

Consistently high processing quality for permanent safe contact.

Makes handling easier

Quick, easy cable insertion thanks to funnel sleeve.

Increases your safety

Cable breakages prevented thanks to protected individual wires. High thermal resistance up to 105 °C.

• Increases your efficiency

Automatic stripping and crimping tool for a wide range of coverage from 0.08 - 16 mm². Comprehensive assortment of wire end ferrules and cable connectors in a clear and mobile assortment box.

Increases your work quality

Gas-tight connections thanks to perfect combination of professional tools and high quality connectors.



Stripping and crimping tool set 4-pcs.



Increases your efficiency: Comprehensive assortment of wire end ferrules and cable connectors in a clear and mobile assortment box. **Increases your work quality:** Gas-tight connections thanks to perfect combination of professional tools and high quality connectors.

with cable connectors 2,600 pcs. colour code DIN in assortment box

| Order-No | o. |
|---|--|
| 43984 | 1 |
| • | Automatic crimp tool for wire-end sleeves hex crimping / 210 mm, 0,08-16 mm² (41246) |
| *************************************** | Stripping tool, automatic up to 16mm² / 200 mm, 8" (42062) |
| • | Crimping tools for isolated cable eyes and contacts. / 220 mm, 0,5-6 mm² (33841) |
| | Wire end ferrules with plastic collar |
| | $400 \times 0,50 \ / \ 400 \times 0,75 \ / \ 400 \times 1,00 \ / \ 300 \times 1,50 \ / \ 200 \times 2,50 \ / \ 100 \times 4,00 \ / \ 50 \times 6,00 \ / \ 50 \times 10,0 \ / \ 50 \times 16,0$ |
| | Crimp-type cable socket, ring-shaped, insulated |
| | 50 x 0,50 - 1,00; M4 / 50 x 0,50 - 1,00; M5 / 50 x 1,50 - 2,50; M5 / 50 x 1,50 - 2,50; M6 / 50 x 4,00 - 6,00; M6 / 50 x 4,00 - 6,00; M8 |
| | Butt connectors, insulated 50 x 0,50 - 1,00 / 50 x 1,50 - 2,50 / 50 x 4,00 - 6,00 |
| | Female blade connectors, insulated 50 x 0,50 - 1,00; 6,3 x 0,8 / 50 x 1,50 - 2,50; 6,3 x 0,8 |
| | Male blade connectors, insulated 50 x 0,50 - 1,00; 6,3 x 0,8 / 50 x 1,50 - 2,50; 6,3 x 0,8 |

With connection elements, 2,600 units, colour code 1 (FR), in assortment box

| Order-No | |
|----------|--|
| 43982 | 1 |
| • | Automatic crimp tool for wire-end sleeves hex crimping / 210 mm, 0,08-16 mm² (41246) |
| | Stripping tool, automatic up to 16mm² / 200 mm, 8" (42062) |
| • | Crimping tools for isolated cable eyes and contacts. / 220 mm, 0,5-6 mm² (33841) |
| | Wire end ferrules with plastic collar |
| | $400 \times 0,50 \ / \ 400 \times 0,75 \ / \ 400 \times 1,00 \ / \ 300 \times 1,50 \ / \ 200 \times 2,50 \ / \ 100 \times 4,00 \ / \ 50 \times 6,00 \ / \ 50 \times 10,0 \ / \ 50 \times 16,0$ |
| | Crimp-type cable socket, ring-shaped, insulated |
| | 50 x 0,50 - 1,00; M4 / 50 x 0,50 - 1,00; M5 / 50 x 1,50 - 2,50; M5 / 50 x 1,50 - 2,50; M6 / 50 x 4,00 - 6,00; M6 / 50 x 4,00 - 6,00; M8 |
| | Butt connectors, insulated 50 x 0,50 - 1,00 / 50 x 1,50 - 2,50 / 50 x 4,00 - 6,00 |
| | Female blade connectors, insulated 50 x 0,50 - 1,00; 6,3 x 0,8 / 50 x 1,50 - 2,50; 6,3 x 0,8 |
| | Male blade connectors, insulated 50 x 0,50 - 1,00; 6,3 x 0,8 / 50 x 1,50 - 2,50; 6,3 x 0,8 |

With connection elements, 2,600 units, colour code 2 (DE), in assortment box

| 43983 Automatic crimp tool for wire-end sleeves hex crimping / 210 mm, 0,08-16 mm² (41246) Stripping tool, automatic up to 16mm² / 200 mm, 8" (42062) Crimping tools for isolated cable eyes and contacts. / 220 mm, 0,5-6 mm² (33841) Wire end ferrules with plastic collar 400 x 0,50 / 400 x 0,75 / 400 x 1,00 / 300 x 1,50 / 200 x 2,50 / 100 x 4,00 / 50 x 6,00 / 50 x 10,0 / 50 x 16,0 Crimp-type cable socket, ring-shaped, insulated 50 x 0,50 − 1,00; M4 / 50 x 0,50 − 1,00; M5 / 50 x 1,50 − 2,50; M5 / 50 x 1,50 − 2,50; M6 / 50 x 4,00 − 6,00; M6 / | |
|---|--------|
| Stripping tool, automatic up to 16mm² / 200 mm, 8" (42062) Crimping tools for isolated cable eyes and contacts. / 220 mm, 0,5-6 mm² (33841) Wire end ferrules with plastic collar 400 x 0,50 / 400 x 0,75 / 400 x 1,00 / 300 x 1,50 / 200 x 2,50 / 100 x 4,00 / 50 x 6,00 / 50 x 10,0 / 50 x 16,0 Crimp-type cable socket, ring-shaped, insulated | |
| Crimping tools for isolated cable eyes and contacts. / 220 mm, 0,5-6 mm² (33841) Wire end ferrules with plastic collar 400 x 0,50 / 400 x 0,75 / 400 x 1,00 / 300 x 1,50 / 200 x 2,50 / 100 x 4,00 / 50 x 6,00 / 50 x 10,0 / 50 x 16,0 Crimp-type cable socket, ring-shaped, insulated | |
| Wire end ferrules with plastic collar 400 x 0,50 / 400 x 0,75 / 400 x 1,00 / 300 x 1,50 / 200 x 2,50 / 100 x 4,00 / 50 x 6,00 / 50 x 10,0 / 50 x 16,0 Crimp-type cable socket, ring-shaped, insulated | |
| 400 x 0,50 / 400 x 0,75 / 400 x 1,00 / 300 x 1,50 / 200 x 2,50 / 100 x 4,00 / 50 x 6,00 / 50 x 10,0 / 50 x 16,0 Crimp-type cable socket, ring-shaped, insulated | |
| Crimp-type cable socket, ring-shaped, insulated | |
| | |
| $50 \times 0, 50 - 1,00; M4 / 50 \times 0, 50 - 1,00; M5 / 50 \times 1,50 - 2,50; M5 / 50 \times 1,50 - 2,50; M6 / 50 \times 4,00 - 6,00; M6 / 50 \times 4,00 - 6,$ | |
| | 00; M8 |
| Butt connectors, insulated 50 x 0,50 - 1,00 / 50 x 1,50 - 2,50 / 50 x 4,00 - 6,00 | |
| Female blade connectors, insulated 50 x 0,50 - 1,00; 6,3 x 0,8 / 50 x 1,50 - 2,50; 6,3 x 0,8 | |
| Male blade connectors, insulated 50 x 0,50 - 1,00; 6,3 x 0,8 / 50 x 1,50 - 2,50; 6,3 x 0,8 | |

Insert boxes set





Spare part: Insert boxes for assortment box connector elements 43982, 439823 and 43984

16-pcs. for assortment box connector elements

| Order-No. | |
|-----------|---|
| | |
| 43995 | 1 |



Simplifies your work: Easy removal and safe storage thanks to the pocket box with latching twist cap. Increases your efficiency: Automatic stripping and crimping tool for a wide range of coverage from 0.08 - 16 mm². Ideal for mobile use thanks to compact, stackable pocket box. Increases your work quality: Gas-tight connections thanks to perfect combination of professional tools and high quality connectors.

with wire end ferrules 500 pcs. colour code DIN in L-Boxx Mini

| 02001 | 093001 | ^ |
|-------|---------|---|
| 93001 | U9300 I | u |

| Order-No. | |
|-----------|---|
| 43987 | 1 |
| • | Automatic crimp tool for wire-end sleeves hex crimping 210 mm, 0,08-16 mm² (41246) |
| | Stripping tool automatic up to 16 mm ² in blister pack 200 mm, 8" (42062) |
| | Wire end sleeves with plastic collar set (43904) 50 x 0,50 / 100 x 0,75 / 100 x 1,00 / 100 x 1,50 / 50 x 2,50 |
| | Wire end sleeves with plastic collar set (43903) 50 x 4,00 / 20 x 6,00 / 20 x 10,0 / 10 x 16,0 |

With wire end sleeves, 500 units, colour code 1 (FR), in L Boxx Mini

930010930010

| Order-No. | |
|---|--|
| 43985 | 1 |
| • | Automatic crimp tool for wire-end sleeves hex crimping 210 mm, 0,08-16 mm ² (41246) |
| *************************************** | Stripping tool automatic up to 16 mm² in blister pack 200 mm, 8" (42062) |
| | Twin wire end sleeves with plastic collar set (43900) 50 x 0,50 / 100 x 0,75 / 100 x 1,00 / 100 x 1,50 / 50 x 2,50 |
| | Twin wire end sleeves with plastic collar set (43899) 50 x 4,00 / 20 x 6,00 / 20 x 10,0 / 10 x 16,0 |

With wire end sleeves, 500 units, colour code 2 (DE), in L Boxx Mini

| Order-No | o. |
|----------|--|
| 43986 | 1 |
| • | Automatic crimp tool for wire-end sleeves hex crimping 210 mm, 0,08-16 mm² (41246) |
| | Stripping tool automatic up to 16 mm² in blister pack 200 mm, 8" (42062) |
| | Wire end sleeves with plastic collar set (43902) 50 x 0,50 / 100 x 0,75 / 100 x 1,0 0 / 100 x 1,50 / 50 x 2,50 |
| | Wire end sleeves with plastic collar set (43901) 50 x 4,00 / 20 x 6,00 / 20 x 10,0 / 10 x 16,0 |



Simplifies your work: Easy removal and safe storage thanks to the pocket box with latching twist cap. Increases your safety: Cable breakages prevented thanks to protected individual wires. High thermal resistance up to 105 °C. Makes handling easier: Organisation system for your workshop or storage area gives you simple and quick access. Quick, easy cable insertion thanks to funnel sleeve. Increases your efficiency: Extensive assortment of wire sleeves with mobile organiser box sets and a selection of the most popular sizes in polyester bags. Ideal for mobile use thanks to compact, stackable pocket box. Increases your process safety: Consistently high processing quality for permanent safe contact.

Colour code DIN, 0.5 - 10 mm² in polyester bag and 0.5 - 16 mm² in organiser box

C000C

| Order-No |). (m) |
|---|---|
| 44007 | 1 |
| | Wire end sleeves with plastic collar set 8 units 50 x 0,50 / 100 x 0,75 / 100 x 1,00 / 100 x 1,50 / 50 x 2,50 |
| *************************************** | Wire end sleeves with plastic collar set 8 units 50 x 4,00 / 20 x 6,00 / 20 x 10,0 / 10 x 16,0 |
| | Wire end ferrules with plastic collar |
| | 80 units 100 x 0,50 / 80 units 100 x 0,75 / 60 units 100 x 1,00 / 60 units 100 x 1,50 / 30 units 100 x 2,50 / 30 units 100 x 4,00 / |
| | 30 units 100 x 2,50 / 20 units 100 x 6,00 / 20 units 50 x 100 |

Colour code 1 (FR), 0.5 - 10 mm² in polyester bag and 0.5 - 16 mm² in organiser box

C000A

| Order-N | o. |
|---------|---|
| 44005 | 1 |
| | Wire end sleeves with plastic collar set 8 units 50 x 0,50 / 100 x 0,75 / 100 x 1,00 / 100 x 1,50 / 50 x 2,50 |
| | Wire end sleeves with plastic collar set 8 units 50 x 4,00 / 20 x 6,00 / 20 x 10,0 / 10 x 16,0 |
| | Wire end ferrules with plastic collar |
| | 80 units 100 x 0,50 / 80 units 100 x 0,75 / 60 units 100 x 1,00 / 60 units 100 x 1,50 / 30 units 100 x 2,50 / 30 units 100 x 4,00 / |
| | 30 units 100 x 2,50 / 20 units 100 x 6,00 / 20 units 50 x 100 |

Colour code 2 (DE), 0.5 - 10 \mbox{mm}^{2} in polyester bag and 0.5 - 16 \mbox{mm}^{2} in organiser box

COOOF

| Order-No | o. ± |
|----------|---|
| 44006 | 1 |
| | Wire end sleeves with plastic collar set 8 units 50 x 0,50 / 100 x 0,75 / 100 x 1,00 / 100 x 1,50 / 50 x 2,50 |
| | Wire end sleeves with plastic collar set 8 units 50 x 4,00 / 20 x 6,00 / 20 x 10,0 / 10 x 16,0 |
| | Wire end ferrules with plastic collar |
| | 80 units 100 x 0,50 / 80 units 100 x 0,75 / 60 units 100 x 1,00 / 60 units 100 x 1,50 / 30 units 100 x 2,50 / 30 units 100 x 4,00 / |
| | 30 units 100 x 2,50 / 20 units 100 x 6,00 / 20 units 50 x 100 |

Wire end sleeves with plastic collar set





Simplifies your work: Easy removal and safe storage thanks to the pocket box with latching twist cap. Increases your safety: Cable breakages prevented thanks to protected individual wires. High thermal resistance up to 105 °C. Makes handling easier: Quick, easy cable insertion thanks to funnel sleeve. Increases your efficiency: Ideal for mobile use thanks to compact, stackable pocket box. Increases your process safety: Consistently high processing quality for permanent safe contact.

Simplifies your work: Easy removal and safe storage thanks to the pocket box with latching twist cap. Increases your safety: Cable breakages prevented thanks to protected individual wires. High thermal resistance up to 105 °C. Makes handling easier: Quick, easy cable insertion thanks to funnel sleeve. Increases your efficiency: Ideal for mobile use thanks to compact, stackable pocket box. Increases your process safety: Consistently high processing quality for permanent safe contact.

| 0.5–2 | r C000C | |
|---|--|-----------|
| Order- | No. | |
| 43904 | 8 | |
| *************************************** | 50 x 0.50 / 100 x 0.75 / 100 x 1.00 / 100 x 1.50 / | 50 x 2.50 |

| 4–16 mm ² , 100 units, DIN colour code, in dispenser | C000C |
|---|-------|
| Order-No. | |
| 43903 8 | |
| 50 x 4,00 / 20 x 6,00 / 20 x 10,0 / 10 x 16,0 | - |

| 0.5-2.5 mm², 400 units, colour code 1 (FR), in dispenser | | | | | | | |
|--|--------|--|--|--|--|--|--|
| Order-No. | | | | | | | |
| 43900 8 | | | | | | | |
| 50 x 0.50 / 100 x 0.75 / 100 x 1.00 / 100 x 1.50 / 50 | x 2.50 | | | | | | |

| 4-16 mm², 100 units, colour code 1 (FR) in dispenser | | | | | | |
|--|---|--|--|--|--|--|
| Order-No. | | | | | | |
| 43899 | 8 | | | | | |
| 50 x 4,00 / 20 x 6,00 / 20 x 10,0 / 10 x 16,0 | | | | | | |

| 0.5-2.5 mm², 400 units, colour code 2 (DE), in dispenser | | | | | | |
|--|--------|--|--|--|--|--|
| Order-No. | | | | | | |
| 43902 8 | | | | | | |
| 50 x 0,50 / 100 x 0,75 / 100 x 1,00 / 100 x 1,50 / 50 x | x 2,50 | | | | | |

| 4–16 mm ² , 100 units, colour code 2 (DE) in dispenser | C000B |
|---|-------|
| Order-No. | |
| 43901 8 | |
| 50 x 4,00 / 20 x 6,00 / 20 x 10,0 / 10 x 16,0 | |




Simplifies your work: Easy removal and safe storage thanks to the pocket box with latching twist cap. Increases your safety: Cable breakages prevented thanks to protected individual wires. High thermal resistance up to 105 °C. Makes handling easier: Quick, easy cable insertion thanks to funnel sleeve. Increases your efficiency: Ideal for mobile use thanks to compact, stackable pocket box. Increases your process safety: Consistently high processing quality for permanent safe contact.

| 2x 2 x 0.75 - 2 x 2.5 mm ² , 200 units, DIN colour code, in dispenser | C001C |
|--|--------|
| Order-No. | |
| 43907 8 | |
| 50 x 2 x 0,75 / 50 x 2 x 1,00 / 50 x 2 x 1,50 / 50 x 2 | x 2,50 |

| 2 x 0.75 - 2 x $2.5 \ mm^2$, 200 units, colour code 1 (FR), in dispenser | | | | | | |
|---|-------------------------------|--|--|--|--|--|
| Order-No. | | | | | | |
| 43905 | 8 | | | | | |
| 50 x 2 x 0,75 / 50 x 2 x 1,00 / | 50 x 2 x 1,50 / 50 x 2 x 2,50 | | | | | |

| 2 x 0.75 - 2 x 2.5 mm², 200 units, colour code 2 (DE), in dispenser $$^{\circ}$$ | | | | | | | | |
|--|---|--|--|--|--|--|--|--|
| Order-No. | = | | | | | | | |
| 43906 | 8 | | | | | | | |
| 50 x 2 | x0,75 / 50 x 2 x 1,00 / 50 x 2 x 1,50 / 50 x 2 x 2,50 | | | | | | | |





Increases your safety: Cable breakages prevented thanks to protected individual wires. High thermal resistance up to 105 °C. Makes handling easier: Quick, easy cable insertion thanks to funnel sleeve. Increases your process safety: Consistently high processing quality for permanent safe contact.

| | | | | | | | | | | | C000A |
|-----------|-------------|-------|-----|------|-----|----|----|------|------|-----|-------|
| Order-No. | ∢œ | mm² | AWG | D1 | D2 | L1 | L2 | S1 | S2 | Ţ | |
| 43908 | brown∙ | 0,14 | 26 | 0,7 | 1,6 | 12 | 6 | 0,15 | 0,25 | 100 | 40 |
| 43909 | purple● | 0,25 | 24 | 0,75 | 1,8 | 12 | 6 | 0,15 | 0,25 | 100 | 40 |
| 43910 | light pink• | 0,34 | 22 | 0,8 | 2 | 12 | 6 | 0,15 | 0,25 | 100 | 40 |
| 43911 | white | 0,50 | 20 | 1 | 2,6 | 14 | 8 | 0,15 | 0,25 | 100 | 40 |
| 43912 | blue | 0,75 | 18 | 1,2 | 2,8 | 14 | 8 | 0,15 | 0,25 | 100 | 40 |
| 43913 | red | 1,00 | 18 | 1,4 | 3 | 14 | 8 | 0,15 | 0,25 | 100 | 60 |
| 43914 | black | 1,50 | 16 | 1,7 | 3,5 | 14 | 8 | 0,15 | 0,25 | 100 | 60 |
| 43915 | grey | 2,50 | 14 | 2,2 | 4,2 | 14 | 8 | 0,15 | 0,25 | 100 | 50 |
| 43916 | orange | 4,00 | 12 | 2,8 | 4,8 | 17 | 10 | 0,2 | 0,3 | 100 | 30 |
| 43917 | green | 6,00 | 10 | 3,5 | 6,3 | 20 | 12 | 0,2 | 0,3 | 100 | 20 |
| 43918 | brown | 10,00 | 8 | 4,5 | 7,6 | 22 | 12 | 0,2 | 0,4 | 50 | 20 |
| 43919 | ivory | 16,00 | 6 | 5,8 | 8,8 | 24 | 12 | 0,2 | 0,4 | 50 | 20 |
| | | | | | | | | | | | |

^{*} Additional dimension. Non-DIN size.

| | | | | | | | | | | | C000 |
|-----------|-------------|-------|-----|------|-----|----|----|------|------|-----|------|
| Order-No. | ∢ © | mm² | AWG | D1 | D2 | L1 | L2 | S1 | S2 | Ţ | |
| 43920 | grey∙ | 0,14 | 26 | 0,7 | 1,6 | 12 | 6 | 0,15 | 0,25 | 100 | 40 |
| 43921 | light blue• | 0,25 | 24 | 0,75 | 1,8 | 12 | 6 | 0,15 | 0,25 | 100 | 40 |
| 43922 | turquoise∙ | 0,34 | 22 | 0,8 | 2 | 12 | 6 | 0,15 | 0,25 | 100 | 40 |
| 43923 | orange | 0,50 | 20 | 1 | 2,6 | 14 | 8 | 0,15 | 0,25 | 100 | 40 |
| 43924 | white | 0,75 | 18 | 1,2 | 2,8 | 14 | 8 | 0,15 | 0,25 | 100 | 40 |
| 43925 | yellow | 1,00 | 18 | 1,4 | 3 | 14 | 8 | 0,15 | 0,25 | 100 | 60 |
| 43926 | red | 1,50 | 16 | 1,7 | 3,5 | 14 | 8 | 0,15 | 0,25 | 100 | 60 |
| 43927 | blue | 2,50 | 14 | 2,2 | 4,2 | 14 | 8 | 0,15 | 0,25 | 100 | 50 |
| 43928 | grey | 4,00 | 12 | 2,8 | 4,8 | 17 | 10 | 0,2 | 0,3 | 100 | 30 |
| 43929 | black | 6,00 | 10 | 3,5 | 6,3 | 20 | 12 | 0,2 | 0,3 | 100 | 20 |
| 43930 | ivory | 10,00 | 8 | 4,5 | 7,6 | 22 | 12 | 0,2 | 0,4 | 50 | 20 |
| 43931 | green | 16,00 | 6 | 5,8 | 8,8 | 24 | 12 | 0,2 | 0,4 | 50 | 20 |

| တ | |
|----|-----|
| Ĺ | |
| ₩ | |
| | |
| ⊋ | > |
| 25 | ·≽ |
| .= | - |
| > | ₹ |
| ည | . ż |
| ≒ | ٧ |
| 용 | |
| .≌ | |
| ≠ | |
| S | |
| | |

| | | | | | | | | | | | 0000 |
|-----------|-------|-------|-----|-----|-----|----|----|------|------|-----|----------|
| Order-No. | ∢œ | mm² | AWG | D1 | D2 | L1 | L2 | S1 | S2 | Ţ | ≟ |
| 43911 | white | 0,50 | 20 | 1 | 2,6 | 14 | 8 | 0,15 | | 100 | 40 |
| 43996 | grey | 0,75 | 18 | 1,2 | 2,8 | 14 | 8 | 0,15 | 0,25 | | 40 |
| 43913 | red | 1,00 | 18 | 1,4 | 3 | 14 | 8 | 0,15 | 0,25 | 100 | 60 |
| 43914 | black | 1,50 | 16 | 1,7 | 3,5 | 14 | 8 | 0,15 | 0,25 | 100 | 60 |
| 43927 | blue | 2,50 | 14 | 2,2 | 4,2 | 14 | 8 | 0,15 | | 100 | 50 |
| 43928 | grey | 4,00 | 12 | 2,8 | 4,8 | 17 | 10 | 0,2 | 0,3 | 100 | 30 |
| 43932 | gelb | 6,00 | 10 | 3,5 | 6,3 | 20 | 12 | 0,2 | 0,3 | 100 | 20 |
| 43933 | red | 10,00 | 8 | 4,5 | 7,6 | 22 | 12 | 0,2 | 0,4 | 50 | 20 |
| 43934 | blue | 16,00 | 6 | 5,8 | 8,8 | 24 | 12 | 0,2 | 0,4 | 50 | 20 |
| | | | | | | | | | | | |

INFOBOX:

Wire end ferrules with plastic collar






| | | | | Col | our code 1 | (FR) | C | olour code : | 2 (DE) | C | olour code | DIN |
|-------|----|-----|----|------------|-------------|-----------|----------|--------------|-----------|----|------------|-----------|
| mm² | mm | Ţ | | ∢ C | | Order-No. | ₹ | | Order-No. | ∢œ | | Order-No. |
| 0,14 | 6 | 100 | 40 | | brown∙ | 43908 | == | grey• | 43920 | | | |
| 0,25 | 6 | 100 | 40 | | purple• | 43909 | == | light blue• | 43921 | | | |
| 0,34 | 6 | 100 | 40 | | light pink• | 43910 | == | turquoise• | 43922 | | | |
| 0,50 | 8 | 100 | 40 | = | white | 43911 | | orange | 43923 | | white | 43911 |
| 0,75 | 8 | 100 | 40 | = | blue | 43912 | = | white | 43924 | | grey | 43996 |
| 1,00 | 8 | 100 | 60 | | red | 43913 | -(| yellow | 43925 | | red | 43913 |
| 1,50 | 8 | 100 | 60 | | black | 43914 | - | red | 43926 | | black | 43914 |
| 2,50 | 8 | 100 | 50 | =(1) | grey | 43915 | - | blue | 43927 | | blue | 43927 |
| 4,00 | 10 | 100 | 30 | | orange | 43916 | | grey | 43928 | | grey | 43928 |
| 6,00 | 12 | 100 | 20 | | green | 43917 | =(| black | 43929 | | yellow | 43932 |
| 10,00 | 12 | 50 | 20 | | brown | 43918 | | ivory | 43930 | | red | 43933 |
| 16,00 | 12 | 50 | 20 | | ivory | 43919 | | green | 43931 | | blue | 43934 |

^{*} Additional dimension. Non-DIN size.

Twin wire end ferrules with plastic collar, Colour code 2 (DE)







Increases your safety: Cable breakages prevented thanks to protected individual wires. High thermal resistance up to 105 °C. Makes handling easier: Quick, easy cable insertion thanks to funnel sleeve. Increases your process safety: Consistently high processing quality for permanent safe contact.

| | | | | | | | | | | | | C001A |
|-----------|--------|-----------|--------|------|-----|-----|------|----|------|------|-----|----------|
| Order-No. | ∢œ | mm² | AWG | D1 | D2 | D3 | L1 | L2 | S1 | S2 | Ţ | = |
| 43935 | white | 2 x 0,50 | 2 x 20 | 1,4 | 2,5 | 4,7 | 15 | 8 | 0,15 | 0,25 | 100 | 30 |
| 43936 | blue | 2 x 0,75 | 2 x 18 | 1,7 | 2,8 | 5 | 15 | 8 | 0,15 | 0,25 | | 20 |
| 43937 | red | 2 x 1,00 | 2 x 18 | 1,95 | 3,4 | 5,4 | 15 | 8 | 0,15 | 0,3 | 100 | 20 |
| 43938 | black | 2 x 1,50 | 2 x 16 | 2,2 | 3,6 | 6,6 | 16 | 8 | 0,15 | 0,3 | 100 | 30 |
| 43939 | grey | 2 x 2,50 | 2 x 14 | 2,8 | 4,2 | 7,8 | 18,5 | 10 | 0,2 | 0,3 | 100 | 20 |
| 43940 | orange | 2 x 4,00 | 2 x 12 | 3,7 | 4,9 | 8,8 | 23 | 12 | 0,2 | 0,4 | 50 | 20 |
| 43941 | green | 2 x 6,00 | 2 x 10 | 4,8 | 6,9 | 10 | 26 | 14 | 0,2 | 0,4 | 50 | 15 |
| 43942 | brown | 2 x 10,00 | 2 x 8 | 6,4 | 7,2 | 13 | 26 | 14 | 0,2 | 0,4 | 25 | 20 |

| | | | | | | | | | | | | C001B |
|-----------|------------|-----------|--------|------|-----|-----|------|----|------|------|-----|-------|
| Order-No. | ∢ @ | mm² | AWG | D1 | D2 | D3 | L1 | L2 | S1 | S2 | Ţ | € |
| 43943 | orange | 2 x 0,50 | 2 x 20 | 1,4 | 2,5 | 4,7 | 15 | 8 | 0,15 | 0,25 | 100 | 30 |
| 43944 | white | 2 x 0,75 | 2 x 18 | 1,7 | 2,8 | 5 | 15 | 8 | 0,15 | 0,25 | 100 | 20 |
| 43945 | yellow | 2 x 1,00 | 2 x 18 | 1,95 | 3,4 | 5,4 | 15 | 8 | 0,15 | 0,3 | 100 | 20 |
| 43946 | red | 2 x 1,50 | 2 x 16 | 2,2 | 3,6 | 6,6 | 16 | 8 | 0,15 | 0,3 | 100 | 30 |
| 43947 | blue | 2 x 2,50 | 2 x 14 | 2,8 | 4,2 | 7,8 | 18,5 | 10 | 0,2 | 0,3 | 100 | 20 |
| 43948 | grey | 2 x 4,00 | 2 x 12 | 3,7 | 4,9 | 8,8 | 23 | 12 | 0,2 | 0,4 | 50 | 20 |
| 43949 | black | 2 x 6,00 | 2 x 10 | 4,8 | 6,9 | 10 | 26 | 14 | 0,2 | 0,4 | 50 | 15 |
| 43950 | ivory | 2 x 10,00 | 2 x 8 | 6,4 | 7,2 | 13 | 26 | 14 | 0,2 | 0,4 | 25 | 20 |
| | | | | | | | | | | | | |

| / |
|---|
| 0 |

| Order-No. | ∢c | mm² | AWG | D1 | D2 | D3 | L1 | L2 | S1 | S2 | Ţ | |
|-----------|--------|-----------|--------|------|-----|-----|------|----|------|------|-----|----|
| 43935 | white | 2 x 0,50 | 2 x 20 | 1,4 | 2,5 | 4,7 | 15 | 8 | 0,15 | 0,25 | 100 | 30 |
| 43951 | grey | 2 x 0,75 | 2 x 18 | 1,7 | 2,8 | 5 | 15 | 8 | 0,15 | 0,25 | 100 | 20 |
| 43937 | red | 2 x 1,00 | 2 x 18 | 1,95 | 3,4 | 5,4 | 15 | 8 | 0,15 | 0,3 | 100 | 20 |
| 43938 | black | 2 x 1,50 | 2 x 16 | 2,2 | 3,6 | 6,6 | 16 | 8 | 0,15 | 0,3 | 100 | 30 |
| 43947 | blue | 2 x 2,50 | 2 x 14 | 2,8 | 4,2 | 7,8 | 18,5 | 10 | 0,2 | 0,3 | 100 | 20 |
| 43948 | grey | 2 x 4,00 | 2 x 12 | 3,7 | 4,9 | 8,8 | 23 | 12 | 0,2 | 0,4 | 50 | 20 |
| 43952 | yellow | 2 x 6,00 | 2 x 10 | 4,8 | 6,9 | 10 | 26 | 14 | 0,2 | 0,4 | 50 | 15 |
| 43953 | red | 2 x 10,00 | 2 x 8 | 6,4 | 7,2 | 13 | 26 | 14 | 0,2 | 0,4 | 25 | 20 |

INFOBOX:

Twin wire end ferrules with plastic collar






| | | | | Col | our code | 1 (FR) | Co | lour code | 2 (DE) | 2 (DE) Colour code | | |
|-----------|----|-----|----|----------|----------|-----------|------------|-----------|-----------|--------------------|--------|-----------|
| mm² | mm | Ţ | | ₹ | | Order-No. | ∢ C | • | Order-No. | ₹ | | Order-No. |
| 2 x 0,50 | 8 | 100 | 30 | | white | 43935 | =(| orange | 43943 | = [| white | 43935 |
| 2 x 0,75 | 8 | 100 | 20 | | blue | 43936 | = | white | 43944 | - | grey | 43951 |
| 2 x 1,00 | 8 | 100 | 20 | | red | 43937 | | yellow | 43945 | | red | 43937 |
| 2 x 1,50 | 8 | 100 | 30 | - | black | 43938 | -(1 | red | 43946 | | black | 43938 |
| 2 x 2,50 | 10 | 100 | 20 | = | grey | 43939 | -(1 | blue | 43947 | -(1 | blue | 43947 |
| 2 x 4,00 | 12 | 50 | 20 | -(| orange | 43940 | =(11 | grey | 43948 | = | grey | 43948 |
| 2 x 6,00 | 14 | 50 | 15 | | green | 43941 | | black | 43949 | | yellow | 43952 |
| 2 x 10,00 | 14 | 25 | 20 | -48 | brown | 43942 | -(= | ivory | 43950 | 4 | red | 43953 |

Terminals ring type insulated, per DIN






Increases your safety: High thermal resistance up to 105 °C. Makes handling easier: Quick, easy cable insertion thanks to funnel sleeve. Increases your process safety: Consistently high processing quality for permanent safe contact.

| | | | | | | | | | | C02 |
|-----------|------------|---------|--------|----|-----|----|----|-----|-----|----------|
| Order-No. | ∢ © | mm² | , ,,,, | •1 | D1 | L1 | В | D2 | Ţ | = |
| 43954 | red | 0,5-1,0 | 22-16 | M4 | 4,1 | 18 | 8 | 4,3 | 100 | 15 |
| 43956 | red | 0,5-1,0 | 22-16 | M5 | 4,1 | 19 | 10 | 5,3 | 100 | 15 |
| 43958 | red | 0,5-1,0 | 22-16 | | 4,1 | 21 | 11 | 6,5 | 100 | 15 |
| 43955 | blue | 1,5-2,5 | 16-14 | M4 | 4,5 | 18 | 8 | 4,3 | 100 | 15 |
| 43957 | blue | 1,5-2,5 | 16-14 | M5 | 4,5 | 20 | 10 | 5,3 | 100 | 15 |
| 43959 | blue | 1,5-2,5 | 16-14 | M6 | 4,5 | 22 | 11 | 6,5 | 100 | 15 |
| 43960 | yellow | 4,0-6,0 | 12-10 | M6 | 6,5 | 23 | 11 | 6,5 | 50 | 15 |
| 43961 | yellow | 4,0-6,0 | 12-10 | M8 | 6,5 | 26 | 14 | 8,4 | 50 | 15 |


Terminals fork type insulated, per DIN





Increases your safety: High thermal resistance up to 105 °C. Makes handling easier: Quick, easy cable insertion thanks to funnel sleeve. Increases your process safety: Consistently high processing quality for permanent safe contact.

| | | | | | | | | | | C040 |
|-----------|--------|---------|-------|---|-----|----|----|-----|-----|----------|
| Order-No. | ∢Œ | mm² | AWG | • | D1 | L1 | В | D2 | Ţ | L |
| 43962 | red | 0,5-1,0 | 22-16 | | | 18 | 8 | 4,3 | 100 | 15 |
| 43963 | blue | 1,5-2,5 | 16-14 | | 4,5 | 18 | 8 | 4,3 | 100 | 15 |
| 43964 | yellow | 4,0-6,0 | 12-10 | | 6,5 | 22 | 10 | 5,3 | 50 | 15 |
| | | | | | • | | | | | |

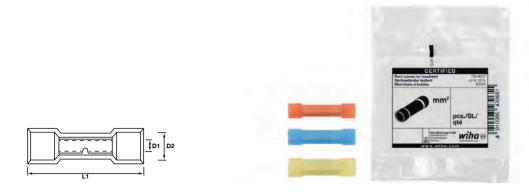

Increases your safety: High thermal resistance up to 105 °C. **Makes handling easier:** Quick, easy cable insertion thanks to funnel sleeve. **Saves time:** No further insulation required after pressing. **Increases your process safety:** Consistently high processing quality for permanent safe contact.

| | | | | | | | | G101 |
|-----------|--------|---------|-------|-----|----|-----|-----|----------|
| Order-No. | ∢œ | mm² | AWG | D1 | L1 | D2 | Ţ | ± |
| 43965 | red | 0,5-1,0 | 22-16 | , | 26 | 1,6 | 100 | 15 |
| 43966 | blue | 1,5-2,5 | 16-14 | | | 2,3 | 100 | 15 |
| 43967 | yellow | 4,0-6,0 | 12-10 | 6,5 | 28 | 3,6 | 50 | 15 |


Female blade connectors, insulated



Increases your safety: High thermal resistance up to 105 °C. Makes handling easier: Quick, easy cable insertion thanks to funnel sleeve. Increases your process safety: Consistently high processing quality for permanent safe contact.

| | | | | | | | | | 014 |
|-----------|--------|---------|-------|------------|-----|------|-----|-----|-----|
| Order-No. | ∢œ | mm² | AWG | <u>j</u> ‡ | D1 | L1 | | ĴŢĹ | |
| 43968 | red | 0,5-1,0 | 22-16 | 6,3 x 0,8 | 3,5 | 21 | 7,8 | 100 | 15 |
| 43969 | blue | 1,5-2,5 | 16-14 | 6,3 x 0,8 | 4,3 | 21 | 7,8 | 100 | 15 |
| 43970 | yellow | 4,0-6,0 | 12-10 | 6,3 x 0,8 | 6,2 | 23,8 | 7,8 | 50 | 15 |

Female blade connectors, fully insulated








Increases your safety: High thermal resistance up to 105 °C. Makes handling easier: Quick, easy cable insertion thanks to funnel sleeve. Saves time: No further insulation required after pressing. Increases your process safety: Consistently high processing quality for permanent safe contact.

C146

| Order-No. | ∢Œ | mm² | AWG | <u>3</u> ‡ | D1 | L1 | | Ţ | |
|-----------|--------|---------|-------|------------|-----|------|-----|-----|----|
| 43971 | red | 0,5-1,0 | | 6,3 x 0,8 | , | 21,5 | 6,8 | 100 | 15 |
| 43972 | blue | 1,5-2,5 | 16-14 | | | 21,8 | 6,8 | 100 | 15 |
| 43973 | yellow | 4,0-6,0 | | 6,3 x 0,8 | 5,8 | 25 | 6,8 | 50 | 15 |

Male blade connectors, insulated








Increases your safety: High thermal resistance up to 105 °C. Makes handling easier: Quick, easy cable insertion thanks to funnel sleeve. Increases your process safety: Consistently high processing quality for permanent safe contact.

C161

| Order-No. | ₹Œ | mm² | AWG | <u>1</u> 1 | D1 | L1 | Ţſ | = |
|-----------|--------|---------|-------|------------|----|------|-----|----------|
| 43974 | red | 0,5-1,0 | 22-16 | | , | 21,5 | 100 | 15 |
| 43975 | blue | | | | , | 21,3 | | 15 |
| 43976 | yellow | | | | | 24 | 50 | 15 |

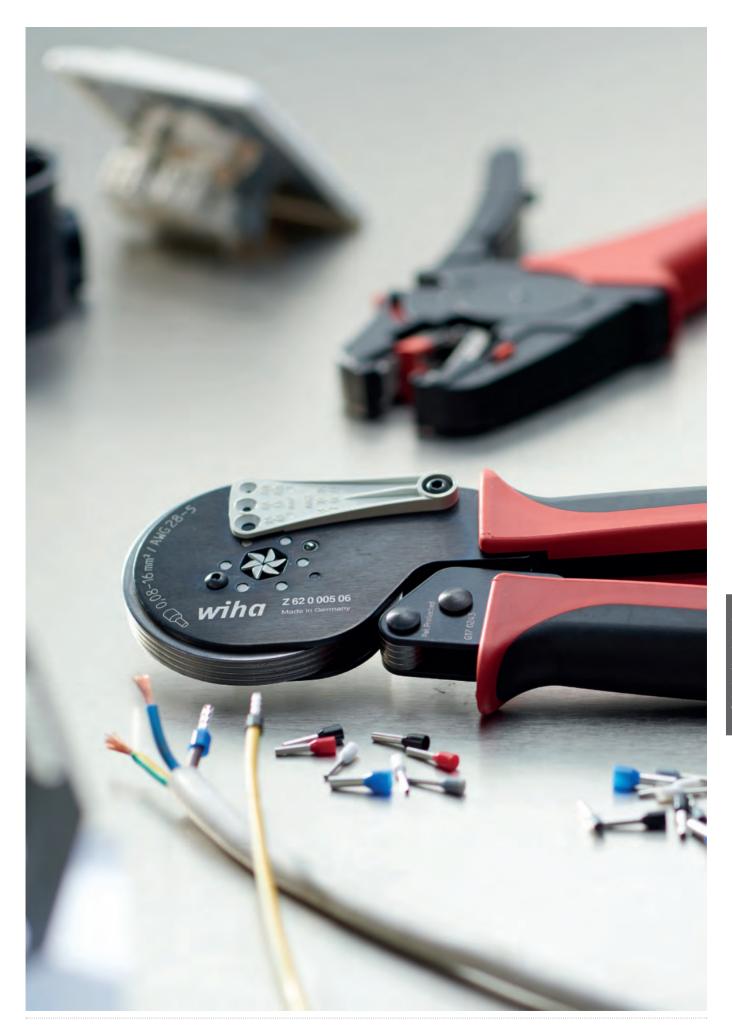



Surveying/marking/measuring/checking This is what we call precision work made to measure.

Wiha measurement and testing devices prove to be dependable helpers during electrical installation work. The multi-functional torch impresses in three ways thanks to its integrated laser, UV light and LED light with two lighting levels. With variable distance marks, the Wiha electrician's spirit level can reach across up to four flush boxes. Thanks to its ingeniously positioned scale, it allows users to make measurements effortlessly from different work positions. Users are guaranteed to see bubbles perfectly, even from a sharp angle. The Wiha electrician's folding ruler provides a scale for up to three flush boxes and edge distance marking at 150 mm. It can also be used to route cables into hard-to-reach installation locations. With its florescent coating, the folding ruler is also quick and easy to find in the dark with a UV light.

"The Wiha spirit level is a big hit! I can see the bubbles perfectly even when taking measurements above my head. I can also mark out measurements without needing to take a break."

Ralf Kästle





Even the most experienced professional tradesmen find it difficult to work efficiently in poorly lit work environments. The Wiha multi-functional torch sheds light on things in three ways: It features an integrated laser, UV light and LED light with two lighting levels. It is thus a compact, universal work tool which replaces several instruments in a single device. The integrated laser offers a great advantage, providing detailed positioning and easy transmission of measurements for tasks such as ceiling installations. This torch is even more practical for portable use thanks to the retaining clip, magnetic positioning and swivelling lamp head used to point the light in the required direction. Compact, light and multi-functional, the Wiha torch ensures optimum illumination for perfect vision and positioning.

• Simplifies your work

Retaining clip and magnetic positioner on the lid allows you to keep hands free for other tasks.

• Simplifies your work

Integrated laser makes it easier to fix position more precisely and project measurements for ceiling installations, for example. Perfect light positioning thanks to lamp head swivelling in an L shape.

• Increases your efficiency

Very strong LED lamp – two light intensities to adjust to light conditions as required. Includes laser and UV light.

Increases your safety

Power-on time of 2 seconds prevents the laser being activated by accident.



Flashlight with LED, laser and UV light



Simplifies your work: Retaining clip and magnetic positioner on the lid allows you to keep hands free for other tasks. Integrated laser makes it easier to fix position more precisely and project measurements for ceiling installations, for example. Perfect light positioning thanks to lamp head swivelling in an L shape. **Increases your safety:** Power-on time of 2 seconds prevents the laser being activated by accident. **Increases your efficiency:** Very strong LED lamp – two light intensities to adjust to light conditions as required. Includes laser and UV light.

in blister pack, including 3 AAA batteries

24670

| Best. Nr. | Nr. LED X- UV | | | SB | | |
|-----------|--------------------------|---------|--------------|-------------------|---|---|
| 41286 | 100 / 310 lm | Class 2 | 390 - 400 nm | 3 x AAA batteries | X | 5 |

Torque QuickCheck torque testing device









Increases your safety: Checking your torque tool regularly guarantees safe, precise work with the correct torque. **Saves time:** LED traffic light system displays results in a way which is quick and easy to understand. **Increases your efficiency:** Fast, easy checking of your torque tool thanks to mobile, compact shape.

with adapter blades and batteries in box

2909

| *************************************** | | | | |
|---|-----|--|---------------------------------------|---|
| Best. Nr. | Nm | #/= % | SB | |
| *************************************** | | ······································ | · · · · · · · · · · · · · · · · · · · | |
| 42086 | 2,8 | 2 | X | 1 |
| | | | | |





Saves time: Rapid voltage test thanks to contactless measuring. Increases your efficiency: Compatible for use in all sockets worldwide thanks to measurement tip suited to international usage. Integrated high-luminescence LED flashlight. Increases your flexibility: Voltage tester covers a wide voltage range between 12 and 1,000 V AC.

Saves time: Rapid voltage test thanks to contactless measuring. **Increases your efficiency:** Compatible for use in all sockets worldwide thanks to measurement tip suited to international usage.

Includes two AAA batteries

| 0 | E | E | 4 | 0 |
|---|----------|----------|---|---|
| 4 | υ | υ | ı | O |

| Order-No. | | ₩₩ | |
|-----------|-------------|-----|----|
| 43797 | 28,5 | 150 | 10 |

Includes two AAA batteries

25514

| Order-No. | — <u></u> | mm | = |
|-----------|------------------|-----|----------|
| 43798 | 28,5 | 150 | 10 |

Voltage tester SoftFinish® single-pole, 110-250 volts



△ ((

Increases your efficiency: Stable and as robust as a fully-fledged screwdriver. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

INFOBOX:

Single pole voltage tester, 12 - 1,000 V AC





- Rapid voltage test thanks to contactless measuring.
- Internationally adjustable measuring tip for all outlets, globally applicable.
- Green illuminated LED indicates readiness.
- Complies with safety standards EN 61010-1 / IEC 61326 and measuring category CAT IV 1,000 VAC.
- Extensive voltage range from 12 1,000 V AC.
- The strength of the alternating electrical field is signalled by an acoustic and five-level LED scale.
- Integrated high-luminescence LED flashlight.

⊖Slotted transparent, with push-on clip

255-11

| Order-No. | Θ | ≕ | \ominus : | mm | | SB | |
|-----------|----------|----------|-------------|-----|---------|----|---|
| 35378 | 3,0 | 60 | 0,5 | 140 | 19 | Х | 5 |
| | | | | | | • | |

Tested according to DIN 57680-6, GS, CE compliant.

INFOBOX:

Single pole voltage tester, 90 - 1,000 V AC



- Rapid voltage test thanks to contactless measuring.
- Internationally adjustable measuring tip for all outlets, globally applicable.
- Green illuminated LED indicates readiness.
- Complies with safety standards EN 61010-1 / IEC 61326 and measuring category CAT IV 1,000 VAC.
- Voltage range from 90 1,000 V AC.
- The voltage is visually indicated by an illuminated LED.

Electrician's spirit level

40 cm







Electrician's Longlife® folding ruler, 2 m



Simplifies your work: Integrated with cable retractor for cables

between 3-7mm. Lowers your costs: Ruler quick and easy to find -

Ruler with integrated distance marks for up to 3 flush boxes. Offers

even in dark environments with a UV light. Increases your efficiency:

you full protection: Tool tested at 10,000 V AC and suitable for 1.000





Simplifies your work: Comfortable measurement in different work positions thanks to the ingeniously positioned scales, even when viewed from above. Saves space: Perfectly portable; fits into Wiha cases. Saves time: Variable distance marks for up to 4 flush boxes. Increases your efficiency: Both bubbles can be seen easily even

from an acute angle.

V AC.

metric, 10 segments

246

4102008

| Order-No. | ‡ | √ C | |
|-----------|----|------------|----|
| 42068 | 15 | orange | 10 |

| Order-No. | mm | |
|-----------|-----|----|
| | 400 | 10 |

Folding ruler LongLife Plus Composite 2 m



metric, 10 segments

410 2005

| Order-No. | ‡ | ∢œ | 싎 |
|-----------|----|------------|----|
| 37067 | 15 | red/ black | 10 |
| | | | |







Striking

Optimum power transmission.

Specially tailored for use by electricians: Wiha impact tools. With optimally uniform weight distribution, the Wiha electric hammer strikes a perfect balance and is also eminently suitable for use in confined working environments. Its flat claws allow you to remove nails and nail clamps easily. The flat surface on the hammer handle ensures cables and dowels are fitted into position without causing any damage to the cable duct or plasterboard. Wiha's scaled impact screwdriver blade ensures that the portable dowel racket makes a perfectly dimensioned dowel hole to the required depth anywhere at any time and without making a mess, unlike power tools. The galvanic separation between the blade and solid steel cap ensures that the user is always protected, even if they accidentally hit a live wire.

"Fits nicely into the hand and can be used in a variety of ways. It's now a permanent fixture in my toolbox!" Andreas Ebener





Thanks to its optimum balance, the electrician's hammer is perfectly sized in the hand while also providing a secure hold when hammering thanks to the ergonomically shaped hammer handle. With its U-shaped impact surface, the Wiha electrician's hammer delivers the optimum solution to working in corners and confined spaces. You can quickly and easily remove nails and nail clamps from walls with the flat claws on the hammer head. The flat surface on the hammer handle means cables and dowels are positioned effectively without causing any damage to the wall.

• Simplifies your work

Flat claws allow you to remove nails and nail clamps easily.

Increases your efficiency

Perfect balance thanks to optimum weight distribution for effective handling.

Improved access

Perfectly suited for use in confined working environments thanks to the combination of a square and round head shape.

• Increases your work quality

The flat surface on the hammer handle ensures cables and dowels are fitted into position without causing any damage.



Electrician's hammer

















Simplifies your work: Dirt- and dust-free work compared to when machines are used. Increases your safety: Galvanic separation in the handle prevents a discharge between the striking cap and the blade. Protect your health: Dowel hole can be made anywhere using a hammer at any time, even near power sockets. Saves time: Hammer dowel holes anywhere at any time without worrying how near you are to wall sockets. Increases your efficiency: Scaled impact screwdriver blade provides more detailed depth measurement. Perfectly dimensioned dowel hole thanks to blade adjusted to required size.

Simplifies your work: Flat claws allow you to remove nails and nail clamps easily. Increases your efficiency: Perfect balance thanks to optimum weight distribution for effective handling. Improved access: Perfectly suited for use in confined working environments thanks to the combination of a square and round head shape. Increases your work quality: The flat surface on the hammer handle ensures cables and dowels are fitted into position without causing any damage.

with 6 mm round blade in blister pack, 5-pcs.

SB 534S5

| Order-No. | | |
|-----------|------------------|---|
| 41289 | | 1 |
| | 1 x Dowel racket | |
| | 2 x 30 mm Dowel | |
| | 2 x 40 mm Dowel | |
| | | |

with 300 g hammer head, in blister pack

846

| Order-No. | ≣ ÷— | ⊨ | |
|-----------|-------------|-----|---|
| 42071 | 23,9 | 283 | 4 |

INFOBOX:

SoftFinish® dowel racket set with dowels





- Makes it easier to insert dowels and saves valuable working time.
- Ensures dirt- and dust-free work compared to machines.
- Galvanic separation between the blade and solid steel cap protects against electric shock.
- Perfect for portable use since you can make dowel holes anywhere at any time at the strike of a hammer.

INFOBOX:

Electrician's hammer







- With its optimally uniform weight distribution, this hammer ensures perfect balance, delivering impact and fatique-free work.
- Its flat claws make it easier to remove fastening components such as nail clamps, even from difficult-toaccess spots.
- Optimum access into corners and confined spaces thanks to U-shaped striking surface.
- The flat hammer handle lower surface acts as a softfaced hammer, ensuring components such as cables and dowels are fixed into position without causing damage.

Subject to technical changes.

All illustrations and graphics, specified dimensions and valuesand references to standards, e.g. DIN/EN, are non-binding. Any liability claims based on this will therefore be rejec ted.

No liability claims will be accepted for printing errors and mistakes which have occurred during the production of the catalogue.

All property rights to the catalogue held by Wiha Werkzeuge GmbH are reserved. The printing or copying of the texts and illustrations contained in this catalogue or its design is prohibited.

Our General Terms and Conditions (Terms of Sale, Deliveryand Payment) apply.

TORX®, TORX PLUS®= Registered Trademarks of ACUMENT GlobalTechnologies B.V.

ACR/AOT, Tri-Wing®, Torq-Set®= Registered Trademarks of Phillips Screw Company

Pozidriv= Registered Trademark of European Industrial Services Ltd.

Protective measures

The following equipment is required for all work on or around live components and should be appropriate for the specific task

- insulating personal protective equipment
- insulating safety mechanisms insulated tools

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work

This is achieved by complying with the five safety rules:

- disconnect
- secure against reconnection
- ensure power is switched off
- earth and short-circuit
- cover or block off adjacent live components

Wiha order number register

| Order-No. | Page | Order-No. | Page | Order-No. | Page | Order-No. | Page |
|-----------|------|-----------|------|-----------|------|-----------|------|
| 00 | | 00833 | 69 | 01805 | 90 | 05 | |
| 00684 | 79 | 00834 | 69 | 01808 | 90 | 05301 | 92 |
| 00685 | 79 | 00846 | 70 | 01809 | 90 | 05302 | 92 |
| 00686 | 79 | 00847 | 70 | 01811 | 90 | 05303 | 92 |
| 00687 | 79 | 00848 | 70 | 01812 | 90 | 05799 | 90 |
| 00689 | 79 | 00849 | 70 | 01913 | 89 | 05800 | 90 |
| 00690 | 79 | 00850 | 70 | 02 | | 06 | |
| 00691 | 79 | 00853 | 71 | 02292 | 98 | 06637 | 92 |
| 00692 | 79 | 00855 | 71 | 03 | | 06638 | 92 |
| 00694 | 79 | 00856 | 71 | 03223 | 78 | 06639 | 92 |
| 00695 | 79 | 00857 | 71 | 03224 | 78 | 06888 | 90 |
| 00696 | 79 | 00858 | 71 | 03225 | 78 | 06889 | 90 |
| 00697 | 79 | 00859 | 71 | 03226 | 78 | 20 | |
| 00698 | 79 | 00860 | 71 | 03228 | 78 | 20218 | 92 |
| 00700 | 79 | 00861 | 71 | 03230 | 78 | 20219 | 92 |
| 00701 | 79 | 00862 | 71 | 03231 | 78 | 20220 | 92 |
| 00702 | 79 | 00863 | 71 | 03232 | 78 | 20221 | 92 |
| 00703 | 79 | 00864 | 71 | 03237 | 78 | 20222 | 92 |
| 00704 | 79 | 00865 | 71 | 03238 | 78 | 20223 | 92 |
| 00706 | 79 | 00866 | 71 | 03239 | 78 | 20224 | 92 |
| 00707 | 79 | 00867 | 71 | 03245 | 78 | 21 | |
| 00708 | 79 | 00868 | 71 | 03246 | 78 | 21045 | 92 |
| 00709 | 79 | 00877 | 70 | 03247 | 78 | 21047 | 92 |
| 00711 | 79 | 00878 | 70 | 03760 | 70 | 22 | |
| 00712 | 79 | 00879 | 70 | 03761 | 70 | 22509 | 90 |
| 00713 | 79 | 00880 | 70 | 03762 | 70 | 22510 | 90 |
| 00819 | 70 | 00881 | 70 | 03988 | 99 | 22511 | 90 |
| 00820 | 70 | 00882 | 70 | 04 | | 22512 | 90 |
| 00821 | 70 | 01 | | 04009 | 90 | 22596 | 92 |
| 00822 | 70 | 01790 | 90 | 04010 | 90 | 22597 | 92 |
| 00823 | 70 | 01791 | 90 | 04059 | 90 | 22598 | 92 |
| 00824 | 70 | 01792 | 90 | 04126 | 90 | 22599 | 92 |
| 00825 | 70 | 01793 | 90 | 04127 | 90 | 22600 | 92 |
| 00826 | 70 | 01794 | 90 | 04176 | 90 | 23 | |
| 00827 | 70 | 01795 | 90 | 04194 | 92 | 23145 | 92 |
| 00828 | 70 | 01796 | 90 | 04195 | 92 | 23147 | 92 |
| 00829 | 70 | 01798 | 90 | 04196 | 92 | 23149 | 92 |
| 00830 | 70 | 01799 | 90 | 04197 | 92 | 23151 | 92 |
| 00831 | 70 | 01800 | 90 | 04198 | 92 | 23195 | 92 |
| 00832 | 70 | 01803 | 90 | | | 23197 | 92 |

| Order-No. | Page | Order-No. | Page | Order-No. | Page | Order-No. | Page |
|-----------|----------|-----------|------|-----------|------|-----------|------|
| 23199 | 92 | 26729 | 112 | 31 | | 32421 | 91 |
| 23201 | 92 | 26732 | 113 | 31863 | 70 | 32423 | 91 |
| 23203 | 92 | 26735 | 113 | 31957 | 90 | 32477 | 89 |
| 23205 | 92 | 26745 | 124 | 31958 | 90 | 32486 | 91 |
| 23207 | 92 | 26755 | 20 | 31959 | 90 | 32490 | 90 |
| 23209 | 92 | 26847 | 125 | 31960 | 90 | 32491 | 90 |
| 23211 | 92 | 26852 | 105 | 31961 | 90 | 32492 | 90 |
| 23213 | 90 | 26864 | 39 | 31962 | 90 | 32493 | 90 |
| 23215 | 90 | 26931 | 79 | 31973 | 91 | 32494 | 91 |
| 23217 | 90 | 27 | | 31975 | 92 | 32495 | 91 |
| 23219 | 90 | 27753 | 79 | 31977 | 92 | 32496 | 91 |
| 23221 | 90 | 27754 | 79 | 32 | | 32497 | 91 |
| 23223 | 90 | 27755 | 79 | 32105 | 90 | 32686 | 90 |
| 23225 | 90 | 27928 | 73 | 32299 | 91 | 32687 | 90 |
| 23226 | 90 | 27929 | 73 | 32302 | 91 | 32688 | 91 |
| 23227 | 90 | 27930 | 73 | 32303 | 91 | 32689 | 91 |
| 23228 | 90 | 27931 | 73 | 32304 | 91 | 33 | |
| 24 | | 27932 | 73 | 32305 | 91 | 33520 | 113 |
| 24867 | 92 | 27933 | 73 | 32306 | 91 | 33703 | 90 |
| 25 | | 27934 | 73 | 32307 | 91 | 33704 | 90 |
| 25477 | 69 | 27935 | 73 | 32308 | 91 | 33705 | 90 |
| 25553 | 92 | 28 | | 32309 | 91 | 33706 | 90 |
| 25739 | 92 | 28481 | 91 | 32310 | 89 | 33707 | 90 |
| 25740 | 92 | 28691 | 49 | 32383 | 79 | 33708 | 90 |
| 25741 | 92 | 29 | | 32384 | 79 | 33709 | 91 |
| 25742 | 92 | 29416 | 88 | 32396 | 70 | 33710 | 91 |
| 26 | | 29417 | 88 | 32397 | 70 | 33711 | 91 |
| 26000 | 91 | 29466 | 71 | 32399 | 79 | 33712 | 91 |
| 26002 | 92 | 30 | | 32400 | 79 | 33713 | 91 |
| 26625 | 39 | 30361 | 70 | 32409 | 91 | 33714 | 91 |
| 26626 | 39 | 30362 | 70 | 32410 | 91 | 33715 | 91 |
| 26627 | 39 | 30363 | 70 | 32411 | 91 | 33716 | 91 |
| 26705 | 108, 112 | 30364 | 70 | 32412 | 91 | 33717 | 91 |
| 26708 | 108, 112 | 30365 | 70 | 32413 | 91 | 33718 | 91 |
| 26711 | 108, 112 | 30366 | 70 | 32414 | 91 | 33719 | 91 |
| 26714 | 108, 113 | 30700 | 70 | 32415 | 91 | 33720 | 91 |
| 26717 | 108, 113 | 30701 | 70 | 32416 | 91 | 33721 | 91 |
| 26720 | 112 | 30715 | 70 | 32417 | 91 | 33722 | 91 |
| 26727 | 112 | 30716 | 70 | 32418 | 91 | 33723 | 91 |
| 26728 | 112 | | | 32419 | 91 | 33724 | 91 |
| | | | | | | | |

| Order-No. | Page | Order-No. | Page | Order-No. | Page | Order-No. | Page |
|-----------|------|-----------|--------|-----------|--------|-----------|--------|
| 33725 | 91 | 34457 | 91 | 35 | | 36454 | 98 |
| 33726 | 91 | 34554 | 92 | 35389 | 67 | 36455 | 67 |
| 33727 | 91 | 34555 | 92 | 35390 | 68 | 36487 | 98 |
| 33728 | 91 | 34556 | 92 | 35391 | 68 | 36536 | 68 |
| 33729 | 91 | 34557 | 92 | 35392 | 68 | 36537 | 68 |
| 33730 | 91 | 34558 | 92 | 35393 | 68 | 36538 | 68 |
| 33731 | 91 | 34559 | 92 | 35394 | 68 | 36539 | 68 |
| 33732 | 91 | 34560 | 92 | 35395 | 68 | 36540 | 68 |
| 33738 | 80 | 34578 | 46, 61 | 35396 | 68 | 36541 | 68 |
| 33744 | 80 | 34579 | 46, 61 | 35446 | 68 | 36542 | 68 |
| 33746 | 80 | 34580 | 46, 61 | 35456 | 90 | 36558 | 67 |
| 33841 | 127 | 34581 | 46, 61 | 35457 | 90 | 36791 | 36 |
| 33842 | 128 | 34582 | 46, 61 | 35501 | 68 | 37 | |
| 33843 | 128 | 34583 | 46, 61 | 35502 | 68 | 37067 | 152 |
| 33844 | 127 | 34584 | 46, 61 | 35503 | 68 | 37147 | 46, 61 |
| 33920 | 91 | 34585 | 46, 61 | 35504 | 68 | 37222 | 46, 61 |
| 33921 | 91 | 34586 | 46, 61 | 35505 | 68 | 37223 | 46, 61 |
| 33922 | 91 | 34587 | 46, 61 | 35506 | 46, 61 | 37224 | 46, 61 |
| 33923 | 91 | 34588 | 46, 61 | 35507 | 46, 61 | 37225 | 46, 61 |
| 33924 | 91 | 34589 | 46, 61 | 35508 | 46, 61 | 37226 | 46, 61 |
| 33925 | 91 | 34590 | 46, 61 | 35509 | 46, 61 | 37227 | 46, 61 |
| 33926 | 91 | 34688 | 119 | 35510 | 46, 61 | 37351 | 97 |
| 33927 | 91 | 34689 | 119 | 35511 | 46, 61 | 37402 | 109 |
| 33928 | 91 | 34690 | 119 | 35861 | 128 | 37403 | 109 |
| 33929 | 91 | 34691 | 119 | 35862 | 128 | 37450 | 112 |
| 33930 | 91 | 34692 | 119 | 35870 | 47 | 38 | |
| 33931 | 91 | 34693 | 119 | 35969 | 125 | 38020 | 21 |
| 33932 | 91 | 34694 | 119 | 36 | | 38074 | 38 |
| 33961 | 90 | 34695 | 119 | 36050 | 127 | 38191 | 104 |
| 33962 | 90 | 34696 | 119 | 36051 | 125 | 38362 | 67 |
| 33963 | 90 | 34697 | 119 | 36052 | 125 | 38370 | 91 |
| 33964 | 90 | 34698 | 119 | 36053 | 125 | 38371 | 91 |
| 33965 | 90 | 34699 | 119 | 36071 | 46, 61 | 38372 | 91 |
| 33966 | 90 | 34700 | 119 | 36092 | 89 | 38552 | 124 |
| 33969 | 20 | 34701 | 119 | 36093 | 89 | 38606 | 80 |
| 34 | | 34702 | 119 | 36094 | 89 | 38612 | 52 |
| 34306 | 89 | 34703 | 119 | 36114 | 78 | 38798 | 125 |
| 34452 | 91 | 34704 | 119 | 36189 | 109 | 38918 | 48 |
| 34453 | 91 | 34705 | 119 | 36327 | 91 | 38919 | 48 |
| 34454 | 91 | 34706 | 119 | 36329 | 68 | 38920 | 48 |
| 34455 | 91 | 34707 | 119 | 36330 | 68 | 38921 | 48 |
| 34456 | 91 | 34708 | 118 | 36389 | 21 | 38925 | 49 |

| Order-No. | Page | Order-No. | Page | Order-No. | Page | Order-No. | Page |
|-----------|------|-----------|--------|-----------|---------|-----------|------|
| 38926 | 49 | 39199 | 91 | 41344 | 42 | 42375 | 72 |
| 38927 | 49 | 39200 | 92 | 41345 | 42 | 42376 | 72 |
| 38928 | 49 | 39201 | 92 | 41476 | 42 | 42377 | 72 |
| 38929 | 49 | 39202 | 92 | 41477 | 42 | 42378 | 72 |
| 38930 | 49 | 39203 | 92 | 41478 | 42 | 42379 | 72 |
| 38931 | 48 | 39204 | 92 | 41479 | 42 | 42380 | 72 |
| 38932 | 48 | 39206 | 92 | 41824 | 86 | 42471 | 72 |
| 38933 | 48 | 39207 | 92 | 41825 | 86 | 42766 | 31 |
| 38934 | 48 | 39208 | 92 | 41826 | 86 | 42989 | 72 |
| 38935 | 48 | 40 | | 41827 | 87 | 43 | |
| 38936 | 48 | 40282 | 22 | 41828 | 87 | 43022 | 25 |
| 39 | | 40523 | 17 | 41829 | 87 | 43023 | 24 |
| 39041 | 88 | 40674 | 37 | 41830 | 86 | 43024 | 24 |
| 39045 | 89 | 40921 | 106 | 41831 | 86 | 43026 | 74 |
| 39049 | 88 | 40923 | 114 | 41832 | 87 | 43027 | 74 |
| 39056 | 89 | 40948 | 22 | 41833 | 87 | 43028 | 74 |
| 39057 | 89 | 41 | | 41834 | 87 | 43029 | 74 |
| 39059 | 89 | 41003 | 66 | 41914 | 31 | 43030 | 74 |
| 39060 | 88 | 41141 | 68 | 41915 | 31 | 43031 | 74 |
| 39083 | 88 | 41142 | 68 | 41923 | 109 | 43032 | 74 |
| 39134 | 89 | 41143 | 68 | 41979 | 96 | 43033 | 74 |
| 39178 | 92 | 41144 | 68 | 42 | | 43034 | 74 |
| 39179 | 92 | 41145 | 68 | 42062 | 126 | 43035 | 74 |
| 39180 | 92 | 41146 | 68 | 42068 | 152 | 43036 | 74 |
| 39181 | 92 | 41147 | 68 | 42069 | 15 | 43037 | 74 |
| 39182 | 92 | 41158 | 52 | 42071 | 158 | 43038 | 74 |
| 39183 | 92 | 41159 | 46, 61 | 42074 | 152 | 43039 | 74 |
| 39184 | 91 | 41160 | 46, 61 | 42086 | 41, 150 | 43040 | 74 |
| 39185 | 91 | 41223 | 23 | 42098 | 85 | 43041 | 74 |
| 39186 | 91 | 41230 | 56 | 42099 | 84 | 43042 | 74 |
| 39187 | 91 | 41231 | 53 | 42114 | 84 | 43043 | 74 |
| 39188 | 92 | 41232 | 54 | 42115 | 84 | 43044 | 74 |
| 39189 | 92 | 41233 | 54 | 42116 | 84 | 43052 | 77 |
| 39190 | 92 | 41235 | 52 | 42117 | 84 | 43053 | 77 |
| 39191 | 92 | 41246 | 127 | 42118 | 84 | 43055 | 77 |
| 39192 | 92 | 41274 | 106 | 42135 | 85 | 43056 | 77 |
| 39193 | 92 | 41279 | 106 | 42136 | 85 | 43057 | 77 |
| 39194 | 92 | 41286 | 150 | 42137 | 85 | 43058 | 77 |
| 39195 | 91 | 41289 | 158 | 42138 | 85 | 43061 | 74 |
| 39196 | 91 | 41341 | 42 | 42139 | 85 | 43062 | 77 |
| 39197 | 91 | 41342 | 42 | 42162 | 126 | 43063 | 77 |
| 39198 | 91 | 41343 | 42 | 42374 | 72 | 43065 | 75 |

| Order-No. | Page | Order-No. | Page | Order-No. | Page | Order-No. | Page |
|-----------|--------|-----------|------------|-----------|----------|-----------|----------|
| 43066 | 75 | 43108 | 76 | 43467 | 55 | 43934 | 139 |
| 43067 | 75 | 43114 | 46, 61 | 43474 | 19 | 43935 | 140, 141 |
| 43068 | 75 | 43115 | 46, 61 | 43660 | 107 | 43936 | 140 |
| 43069 | 75 | 43116 | 46, 61 | 43662 | 107 | 43937 | 140, 141 |
| 43070 | 75 | 43117 | 46, 61 | 43797 | 151 | 43938 | 140, 141 |
| 43071 | 75 | 43125 | 109 | 43798 | 151 | 43939 | 140 |
| 43072 | 75 | 43128 | 47 | 43879 | 18 | 43940 | 140 |
| 43073 | 75 | 43139 | 62 | 43899 | 136 | 43941 | 140 |
| 43074 | 75 | 43140 | 46, 61 | 43900 | 136 | 43942 | 140 |
| 43075 | 75 | 43141 | 46, 61 | 43901 | 136 | 43943 | 140 |
| 43076 | 75 | 43142 | 46, 61 | 43902 | 136 | 43944 | 140 |
| 43077 | 74 | 43143 | 46, 61 | 43903 | 136 | 43945 | 140 |
| 43078 | 74 | 43144 | 46, 61 | 43904 | 136 | 43946 | 140 |
| 43079 | 74 | 43145 | 46, 61 | 43905 | 137 | 43947 | 140, 141 |
| 43080 | 74 | 43146 | 46, 61 | 43906 | 137 | 43948 | 140, 141 |
| 43081 | 74 | 43147 | 46, 61 | 43907 | 137 | 43949 | 140 |
| 43082 | 74 | 43148 | 46, 61 | 43908 | 138 | 43950 | 140 |
| 43083 | 74 | 43149 | 46, 61 | 43909 | 138 | 43951 | 141 |
| 43084 | 74 | 43150 | 46, 61 | 43910 | 138 | 43952 | 141 |
| 43085 | 74 | 43151 | 46, 61 | 43911 | 138, 139 | 43953 | 141 |
| 43086 | 74 | 43152 | 44, 59 | 43912 | 138 | 43954 | 142 |
| 43087 | 74 | 43153 | 44, 59 | 43913 | 138, 139 | 43955 | 142 |
| 43088 | 47, 75 | 43154 | 44, 59 | 43914 | 138, 139 | 43956 | 142 |
| 43089 | 47, 75 | 43155 | 44, 59 | 43915 | 138 | 43957 | 142 |
| 43090 | 47, 75 | 43156 | 44, 59 | 43916 | 138 | 43958 | 142 |
| 43091 | 47, 75 | 43157 | 44, 59 | 43917 | 138 | 43959 | 142 |
| 43092 | 47, 75 | 43158 | 44, 59 | 43918 | 138 | 43960 | 142 |
| 43093 | 47, 75 | 43159 | 44, 59 | 43919 | 138 | 43961 | 142 |
| 43094 | 47, 75 | 43160 | 32, 44, 59 | 43920 | 138 | 43962 | 142 |
| 43095 | 47, 75 | 43161 | 43, 58 | 43921 | 138 | 43963 | 142 |
| 43096 | 47, 75 | 43162 | 43, 58 | 43922 | 138 | 43964 | 142 |
| 43097 | 47, 75 | 43163 | 45, 60 | 43923 | 138 | 43965 | 143 |
| 43098 | 47, 75 | 43164 | 45, 60 | 43924 | 138 | 43966 | 143 |
| 43099 | 47, 75 | 43167 | 57 | 43925 | 138 | 43967 | 143 |
| 43100 | 76 | 43177 | 48 | 43926 | 138 | 43968 | 143 |
| 43101 | 76 | 43292 | 62 | 43927 | 138, 139 | 43969 | 143 |
| 43102 | 76 | 43326 | 106 | 43928 | 138, 139 | 43970 | 143 |
| 43103 | 76 | 43335 | 106 | 43929 | 138 | 43971 | 144 |
| 43104 | 76 | 43340 | 106 | 43930 | 138 | 43972 | 144 |
| 43105 | 76 | 43449 | 56 | 43931 | 138 | 43973 | 144 |
| 43106 | 76 | 43465 | 19 | 43932 | 139 | 43974 | 144 |
| 43107 | 76 | 43466 | 38 | 43933 | 139 | 43975 | 144 |

| Order-No. | Page |
|-----------|------------|
| 43976 | 144 |
| 43982 | 132 |
| 43983 | 133 |
| 43984 | 132 |
| 43985 | 134 |
| 43986 | 134 |
| 43987 | 134 |
| 43995 | 133 |
| 43996 | 139 |
| 44 | |
| 44001 | 78 |
| 44005 | 135 |
| 44006 | 135 |
| 44007 | 135 |
| 44106 | 32, 45, 60 |
| 44107 | 32, 45, 60 |
| 44318 | 30 |
| 44351 | 30 |
| 44363 | 31 |
| 44364 | 31 |
| 44366 | 32, 44, 59 |
| 44367 | 31 |

Notes






Notes







Overview of torque tools

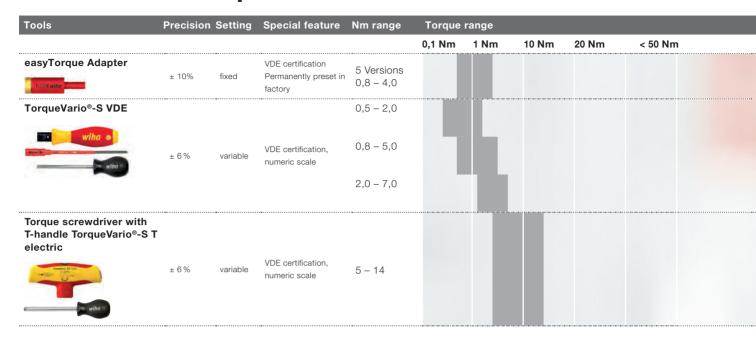


The cutting capacities for our pliers.

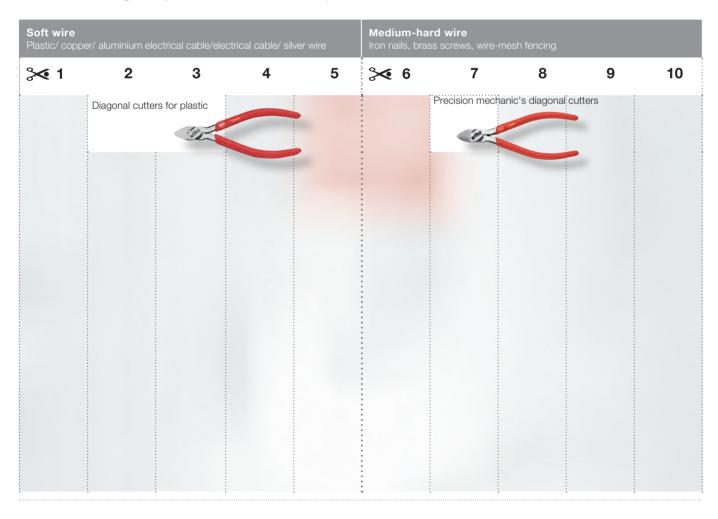

Interchangeable blades

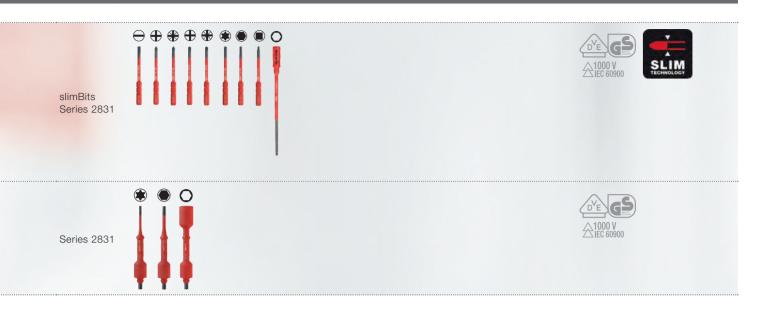

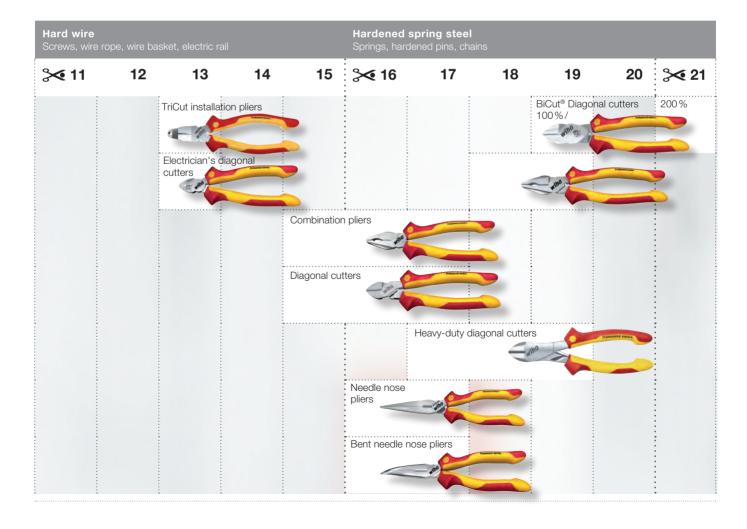

Legend

| Drives | | Screwdrivers [mm] | | Plier | Pliers [mm] | | surement tools [mm] |
|----------|--|-------------------|--------------------------------|---|-------------------------------------|--------------------------|------------------------------|
| ٥ | Triangular nut | T | Cut width | | Flat jaws | ىىسى | Width of segments |
| 0 | Hexagon head | ⊖; | Tip width | • | Half round jaws | ₹ | Colour |
| 0 | Square nut | •1 | Round blade dimension | : | Round jaws | L. | Measurement capacity [mm] |
| • | Internal hexagon | • | Hex blade | (| Cutter without bevel | L | Measurement capacity in Inch |
| 0 | Internal hexagon with drill | _ | Hex bolster | K | Cutter with small bevel | | |
| | hole (tamper-resistant) | : | Scraper width | X | Cutter with bevel | Elek | tro |
| 0 | Tamper Resistant hex | := | Clip opening | I | Anvil cutter | | Battery |
| 9 | Countersink | 1== | Tip width | 1 | Center cutter | LED | LED lumens |
| 0 | Combination drill bit | ф - | Head width, nut driver | 5 | Scissors cutter | * | Laser light |
| • | Pentalobe PL | = | Blade length | • | Front cutting edge in | | |
| • | Y-Type | ‡ _ | Shaft lengths | *************************************** | stripping pliers | Soft | faced hammer [mm] |
| ⊕ | Phillips PH (cross-recessed) | = | Handle length | | Max. diameter | • | Face diameter |
| ₩ | Pozidriv PZ (Phillips) | + | Handle diameter | mm² | Max. cross-section | = : | Hammer face width |
| | Robertson | A. | Torque T-handle length | 0; | Max. gripper pipe diameter | <u> </u> | Hammer head width |
| • | Round tip | - 01 | Torque T-handle width | 0; | Max. gripper width across flats | =: | |
| 1 | Slotted | max. Nm | Max. torque value [Nm] | | External retaining ring | Gene | eral symbols |
| Φ | Slotted nut | max. in.lbs. | Max. torque value [in.lbs] | | Internal retaining ring | | Weight, g |
| • | SIT | # / = % | Accuracy [%] | 3 | Clamping range | • 1 | Diameter |
| • | Spanner | _ | Cable key depth | | Opening width flat | SB | Blister packed |
| 0 | Twist drill | | | | Cutting force | i ∢ → i mm | Total length |
| 1 | Sliding sleeve | | | | · · · · · · · · · · · · · · · · · · | [<] | Total length Inch |
| ① | Torq-Set® | | | WM | with opening spring | | Packaging unit |
| • | TORX® | | | AWG | American Wire Gauge | | |
| * | TORX® with drill hole (tamper-resistant) | L-Ke | ys [mm] Round blade dimension | === | Saw blade length | | |
| • | TORX PLUS® | • | Hex blade | | | | |
| 3 | Tri-Wing® | _ | Hex bolster | | | | |
| * | Multitooth | ţ | Shaft lengths | | | | |
| | Square reaming blade | ₩ | Blade length | | | | |
| | | | | | | | |

Drives

| 0 | Square nut |
|---|--------------------|
| | Square |
| • | G7 drive system |
| 0 | Threaded connector |
| | SDS-Plus® |
| • | Hex |

Xeno SL/PZ

Bits [mm]

—**1** Handle width Diameter

| - ‡ | Threaded connector |
|------------|----------------------|
| ₩ | Drill working length |
| | Screw size |

Side driver length T-handle

| | Battery |
|-----|-------------|
| LED | LED lumens |
| * | Laser light |

| • | Face diameter |
|----------|-------------------|
| | Hammer face width |
| = | Hammer head width |

| Weight, g |
|-------------------|
| Diameter |
| Blister packed |
| Total length |
| Total length Inch |
| Packaging unit |
| |

Legend

Ranges



Case strength



Wheel-along case



Case shape



Electro

Case suitable for transport by air

Torque safety check

Torque



Precision: ±6%



Accuracy ±10%



slimTECHNOLOGY

Pliers



Cutting-to-length diameter



Skinning diameter length



Automatic skinning

DynamicJoint®



Levers out nail



L-keys



MagicRing®



MagicSpring®





Ball end can swivel up to 25°



TORX® ball end; can swivel up to 25°



Visible in UV light

Heavy-duty diagonal cutters



OptiGrip



MagicTips®



2in1 (BiCut®)



3in1 (TriCut®)

Impact tools



Optimum weight distribution



Soft hammer end



clamp





Fully encased



Visible from just 10°



Visible in UV light





MagicRing®

Saves time



MagicSpring®



Ball end can swivel up to 25°



slimTECHNOLOGY

Bits



Suitable for impact screwdrivers



Lifespan 120 times longer



Visible in UV light

General information



Recommended for electricians - non-insulated



VDE-tested and certified





CE marking



ESD electronics mark



Wiha Werkzeuge GmbH

Obertalstraße 3-7

78136 Schonach/Germany
Phone +49 77 22 959 0
Fax +49 77 22 959 159 Inland
Fax +49 77 22 959 155 Export

info.de@wiha.com www.wiha.com

Wiha Tools Ltd.

841 Birchwood Boulevard Warrington WA3 7QU

Phone +44 15 27575 758 +44 15 27910 986 Fax +44 15 27910 023

info.uk@wiha.com www.wiha.com/en

Wiha France SARL

Z. A. de Terrefort 33520 Bruges/France Phone +33 55 6167 935 Fax +33 55 6167 936 servicecommercial@wiha.fr www.wiha.com/fr

Wiha Nordic A/S

Korskildelund 6 2670 Greve/Denmark Phone +45 70 238 045 info.nordic@wiha.com www.wiha.com

Wiha Iberia Willi Hahn S.A.

Av. del Rey Juan Carlos I, 98. 3° C 28916 Leganés/Madrid, Spain Phone +34 91 6938 511 Fax +34 91 6936 383 iberia@wiha.com/es

Wiha Polska Sp. z o.o.

ul. Budowlanych 10 b 80-298 Gdańsk/Poland Phone +48 58 7623 830 Fax +48 58 7623 900 info.pl@wiha.com www.wiha.com/pl

Wiha in Russia

Phone +48 58 7623 830 Fax +48 58 7623 900 michal.moczynski@wiha.com www.wiha.com

Willi Hahn Corp.

1348, Dundas Circle Monticello, MN 55362/USA Phone +1 76 32956 591 Fax +1 76 32956 598 cservice@wihatools.com www.wihatools.com

Wiha Tools Canada Ltd.

394 Deerhurst Drive L6T 5H9, Brampton, ON Phone +1 86 64940 096 Fax +1 80 04947 456 info@wihatools.ca www.wihatools.ca

Wiha Tools (Shanghai) Co.Ltd.

Tony Lv
Zone B No.1000 Jinsui Rd,
Pudong New District Shanghai,
China, 201206
Phone +86 21 64401 119
Fax +86 21 64401 112
info.cn@wiha.com.cn
www.wiha.com.cn

Wiha Finland Oy

Mäkituvantie 9 FI-01510 Vantaa Finland Phone +358 44 231 9988 raija.heliin@wiha.com www.wiha.com

Wiha en Belgique

Phone +32 49 3505 450 info.belux@wiha.com www.wiha.com

Wiha in Nederland

Phone +31 64 6311 330 info.nl@wiha.com www.wiha.com/nl

Wiha in Italia

Thoelke Rappresentanze Srl Phone +39 03 32966 039 info.it@wiha.com www.wiha.com/it

Premium Tools Australia Pty Ltd.

PO Box 63 Bargo, NSW 2574 Phone +61 02 46841 460 Fax +61 02 80887 272 sales@wiha.com.au www.wiha.com.au

Premium Tools (NZ) Ltd.

Unit 5C 89 Ellice Road Wairau Valley Auckland, New Zealand Phone +64 09 4442 560 Fax +64 09 3550 411 sales@wiha.co.nz www.wiha.co.nz

Robert Rieffel AG

Widenholzstrasse 8 8304 Wallisellen/Switzerland Phone +41 44 8773 333 Fax +41 44 8773 322 info@rieffel.ch

